



WR系列斜齿减速器


WR SERIES HELICAL GEAR MOTOR

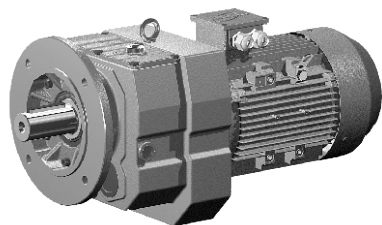


WRF..7型 Model WRF..7
法兰安装三级或二级斜齿轮减速机。
Three-stage or two-stage flange-mounted
helical gear reductor

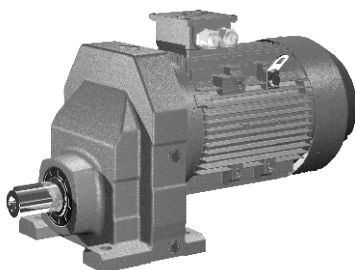


WR..1型 Model WR..1
底脚安装单级斜齿轮减速机。
Single-stage foot-mounted helical gear reductor

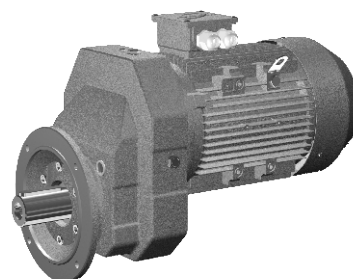


WRF..1型 Model WRF..1
法兰安装单级斜齿轮减速机。
Single-stage flange-mounted helical gear
reductor



WR..7 WR..7型 Model WR..7 WR..7
两WR..7机型组合减速机。
Combination of two Model WR..7 reducers



WR..S..7型 Model WR..S..7
输入轴型，即配输入轴不配电动机的斜齿轮减速机。
Input-shaft style, in another word, helical gear reductor
equipped with input shaft but without the motor

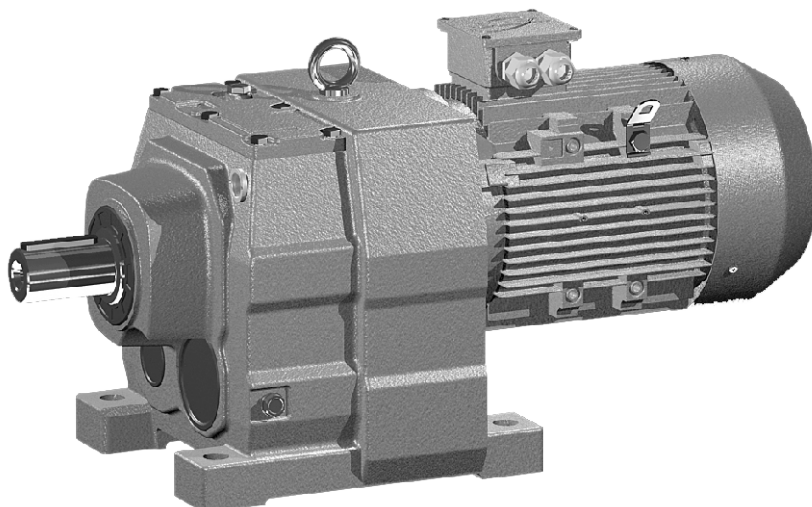

WR..7型 Model WR..7
底脚安装三级或二级斜齿轮减速机。
Three-stage or two-stage foot-mounted helical gear reductor

一、性能特点Characteristics:

1. 午马减速机是在模块组合体系的基础上设计的，可以方便地配用各种型式的电动机或采用其它动力输入。同种机型可配用多种功率的电动机。容易实现各种机型之间的组合联接。
2. 传动效率高，单机型减速机效率高达96%。
3. 传动比划分细，范围广。组合机型可以形成较大的传动比，输出转速低。
4. 安装形式多样，可任意位置卧式或法兰安装。
1. WUMA reducers are based on the building block design, so it's convenient for them to fit all types of motors or to connect with other power input. The same type of reducers can fit motors with different power, so that it's possible for different types of machines to combine or connect.
2. High transmission efficiency. A single machine can reach a transmission efficiency as much as 96%.
3. Precise division of transmission ratio with a wide range. The combination of machines can produce a larger transmission ratio at a low output rotational speed.
4. Various ways of installation. Horizontal installation at any position or flanged installation.

二、场所条件 Working Environment:

1. 环境温度-40℃~50℃。(0℃以下启动时润滑油要加热到0℃以上。)
2. 海拔不超过1000米。
3. 输入转速不大于1800rpm，齿轮最高圆周速度不超过22m/s。
4. 可用于正反转。
5. 无行业限制。
6. 其他条件下使用请与我公司技术部联系。
1. Working temperature: -40℃~50℃ (The lubrication should be heated until above 0℃ if the machine works Below 0℃.)
2. The working place should be lower than 1,000 meters above sea level.
3. The input rotational speed should not exceed 1,800r/m. The circumferential speed of the gear should not exceed 20m/s.
4. Suitable for normal-reverse rotation.
5. Without industry limitation.
6. Please consult our technical supporting department for other circumstances.

三、选型指南 Instructions for Selection:

在确定使用系数之前必须先确定一天的运行小时数，每小时的起停次数和负载类型。其中负载类型按下列公式计算：
The daily operating time, the starting frequency and the load classifications be determined before deciding the service factor. The load classifications is calculated with the following formula:

负载类型 Load classification

- I 均匀负载，惯性加速系数 ≤ 0.2
 - II 中等冲击负载，惯性加速系数 ≤ 3
 - III 强烈冲击负载，惯性加速系数 ≤ 10
 - Uniform load, mass acceleration factor ≤ 0.2
 - Medium Impact Load, mass acceleration factor ≤ 3
 - Heavy shock Load, mass acceleration factor ≤ 10
- 如果惯性加速系数 > 10 ，请与我公司技术部联系。

$$\text{惯性加速系数} = \frac{\text{所有外部转动惯量}}{\text{驱动电机的转动惯量}}$$

实际的工况系数 f_A 必须满足下式：使用系数 $f_B \geq$ 工况系数 f_A
使用系数 f_B 已在后面的选型参数表中列出。

允许的轴伸径向载荷及轴向载荷

输出轴端允许的径向载荷及轴向载荷资料，请与我公司技术部联系。

减速机的使用与维护请参阅随机附带的《减·变速机使用说明书》。

Please contact our technical supporting department in case the mass acceleration factor >10 .

$$\text{Mass acceleration factor} = \frac{\text{All external mass moments of Inertia}}{\text{Mass moment of inertia on the motor end}}$$


The actual operating mode factor (f_A) should meet the following formula: service factor $f_B \geq$ operating mode factor f_A

The service factor f_B is listed in the parameter selection list.


The permitted overhung loads and the axial forces.

Please contact our technical supporting department for the information on the permitted overhung loads and the axial forces at the output end of the shaft.

Regarding the use and maintenance of the reducer, please refer to the attached Instruction Manual of the Reductor and the Variable Speed Motor.

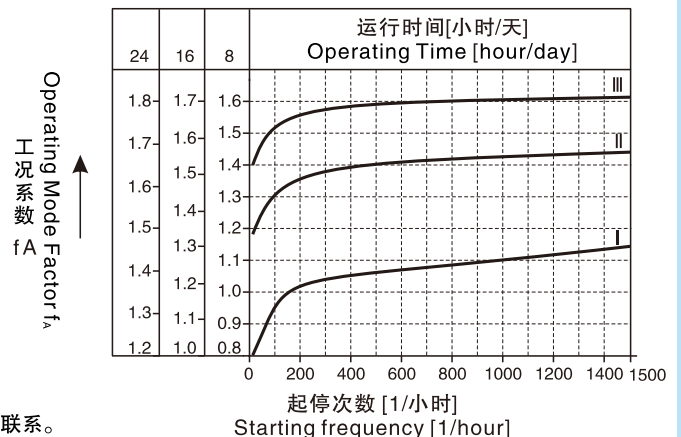


四、结构形式 Mounting type:
WR系列结构图:WR SERIES STRUCTURE DRAWING:

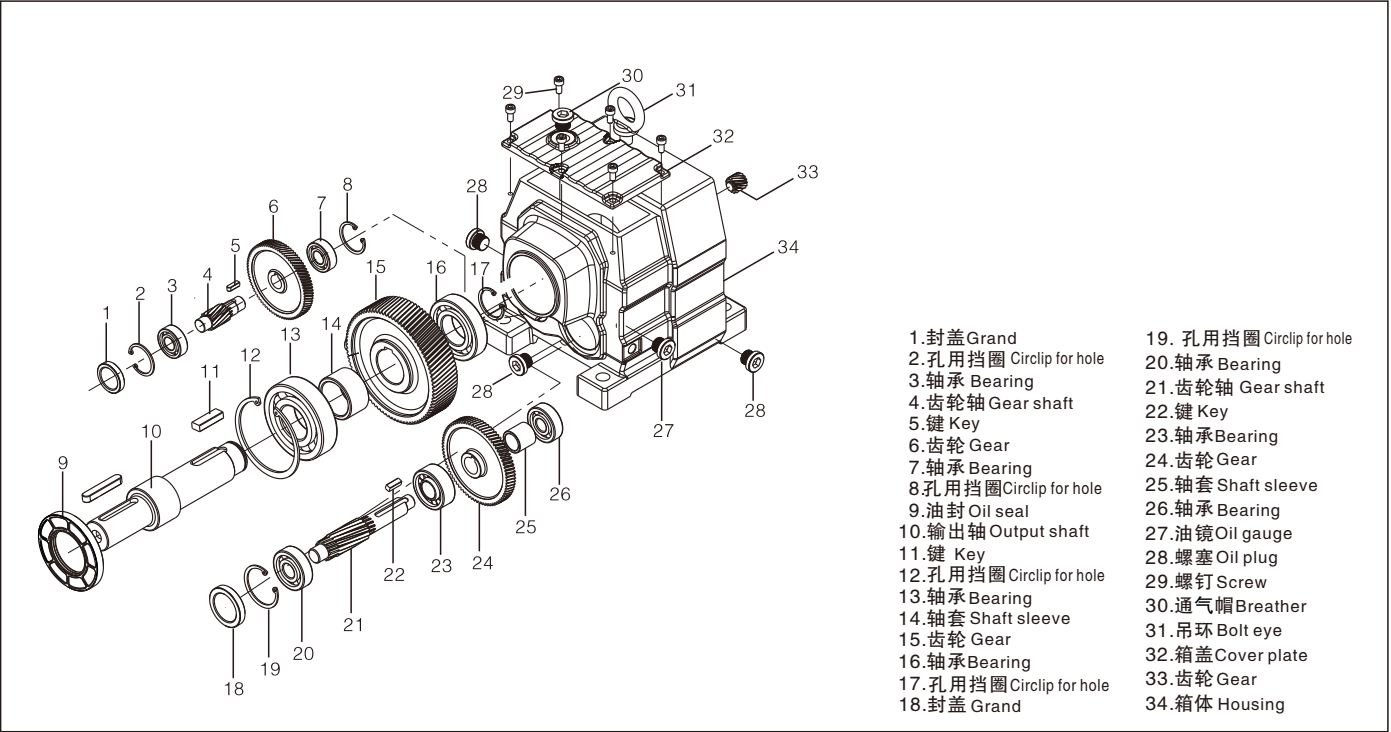

WR系列斜齿轮减速机型号规格及机型表示方法/
本系列减速器的型号规格有:WR17、27、37、47、57、67、77、87、97、107、137、147、167等13种, 减速比有3.83~289.74等多种速比, 可分别配置0.18~160KW。

Type,specification and model notation for WR series bevel gear speed reducers.:
Types,specifications of this series speed reducer have 13 kinds including Wr17、27、37、47、57、67、77、87、97、107、137、147、167 etc, speed reducing ratio:3.83 ~ 289.74, which can be allocated to 0.18 ~ 160kW.



WR..1系列结构图:WR..1 SERIES STRUCTURE DRAWING:

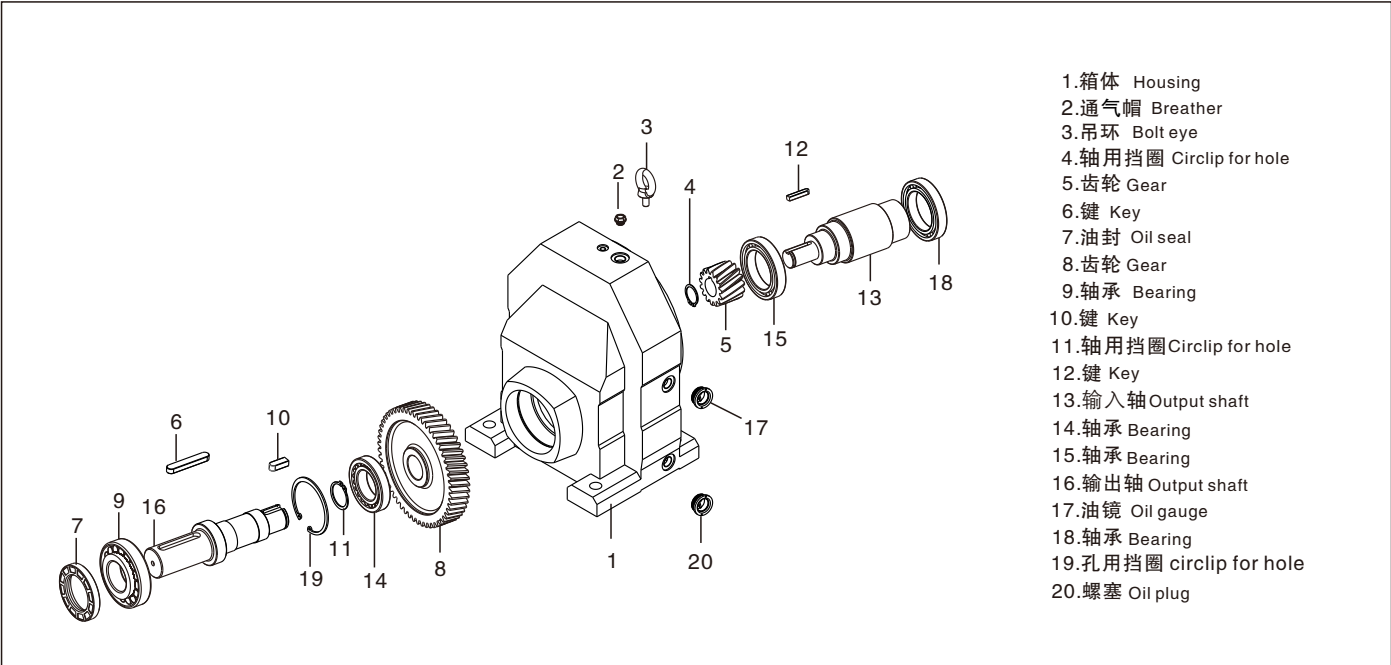

WR..1系列一级减速斜齿轮减速机型号规格及机型表示方法/
本系列减速器的型号规格有:WR51、61、71、81、91、101等6种, 减速比有1.42~8.23等多种速比, 可分别配置0.18~45kW。

Type, specification and model notation for WR..1 series primary deceleration bevel gear speed reducers
The series speed reducers have seven kinds of types and specific-ations including WR51、61、71、81、91、101 etc, peedre ducing ratio range: 1.42 ~ 8.23, which can be allocated to 0.18 ~ 45kW.

五、型号说明 Instructions for Models:

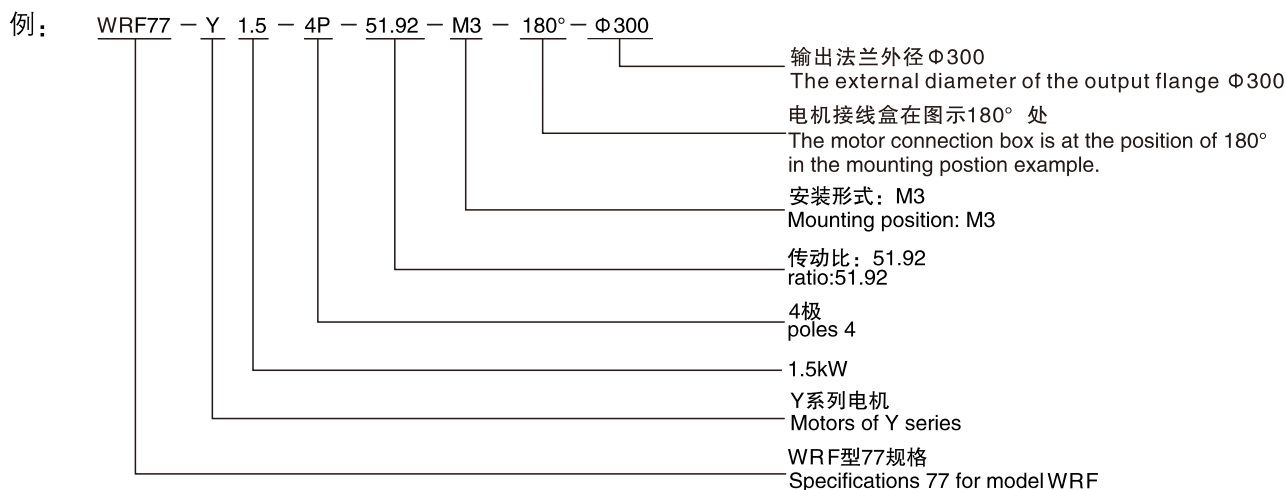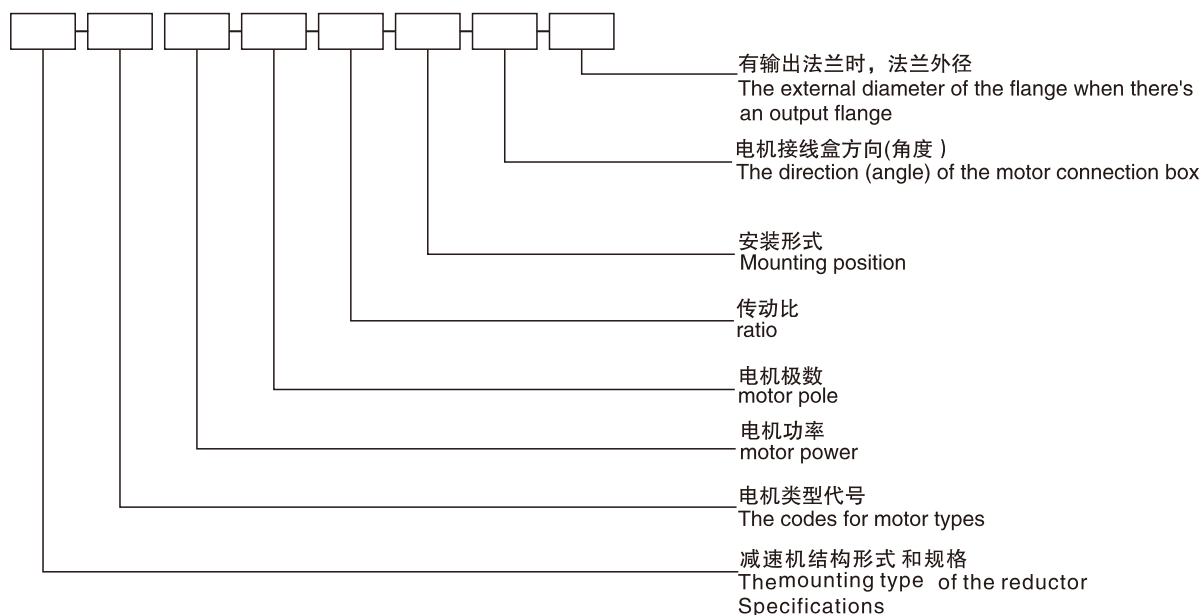

- 注: 1.输入轴型没有电动机的各项内容。
2.无特别说明时Y系列电动机供货按IP54防护等级。
3.不注明安装形式时，按安装形式图中M1安装形式供货。
4.不注明接线盒角度时，按安装形式图中0度位置供货。
5.有输出法兰时，不注明法兰大小按安装结构尺寸图中的小法兰供货。
6.对输出旋转方向与输入旋转方向有特殊要求的用户，请与我公司技术部联系。
7.电机尺寸请查看电机外型尺寸表。

- Note: 1. The input-shaft style is not equipped with any motor
2. Motors of Y series are supplied with protection grade of IP54 unless otherwise specified.
3. The mounting position of M1 as shown in the mounting position example is the default way when supplying unless otherwise specified.
4. 0° as shown in the mounting position example is the default connection box angle when supplying unless otherwise specified.
5. If there's an output flange, the small flange as shown in the Physical Dimension Illustration will be supplied unless otherwise specified.
6. Please contact our technical supporting department in case there's any special requirements on the
7. About Motor size, please check table of motor's dimensions.

WUMA REDUCER / 午马减速机

六、电机类型代号 Codes for Motor Types:

Y系列 Y series	Y	防爆电机 Flameproof Motor	YB	直流电机 Direct Current Motor	Z
制动电机 Brake Motor	YEJ	辊道电机 Roll Motor	YG	变频电机 Variable Frequency Motor	YVP

七、联接法兰L2长度 Length of Contact Flange L2

1. WR..7系列斜齿轮硬齿面减速机联接法兰L2长度表
1. The form on length of the contact flange L2 of the helical gear reductor of WR..7 series

电机机座号 Motor frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315
WR.17	61.5	61.5	80	—	—	—	—	—	—	—	—	—	—	—
WR.27	61.5	61.5	80	80	98	—	—	—	—	—	—	—	—	—
WR.37	61.5	61.5	80	80	98	—	—	—	—	—	—	—	—	—
WR.47	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—	—	—	—
WR.57	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—	—	—	—
WR.67	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—	—	—	—
WR.77	50	50	68.5	68.5	82.5	82.5	111	152.5	—	—	—	—	—	—
WR.87	—	—	63.5	63.5	78.5	78.5	106	147.5	147.5	—	—	—	—	—
WR.97	—	—	57.5	57.5	72.5	72.5	101	142.5	142.5	144.5	—	—	—	—
WR.107	—	—	—	—	66.5	66.5	95	136.5	136.5	138.5	168.5	—	—	—
WR.137	—	—	—	—	—	—	88	129.5	129.5	131.5	161.5	163	—	—
WR.147	—	—	—	—	—	—	80	121.5	121.5	123.5	153.5	153.5	153.5	—
WR.167	—	—	—	—	—	—	—	113.5	113.5	115.5	145.5	145.5	145.5	184

2. WR..1系列斜齿轮硬齿面减速机联接法兰L2长度表
2. The form on length of the contact flange L2 of the helical gear reductor of WR..1 series

电机机座号 Motor frame size	63	71	80	90	100	112	132	160	180	200	225
WR.51	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—
WR.61	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—
WR.71	50	50	68.5	68.5	82.5	82.5	111	152.5	—	—	—
WR.81	—	—	63.5	63.5	78.5	78.5	106	147.5	147.5	—	—
WR.91	—	—	57.5	57.5	72.5	72.5	101	142.5	142.5	144.5	—
WR.101	—	—	—	—	66.5	66.5	95	136.5	136.5	138.5	168.5

八、安装形式图释义 Explanation of mounting position example


 通气孔 Breather valve	 油位孔 Oil level plug	 放油孔 Oil drain plug
--	---	---

九、选型参数表释义 Explanation of Parameter Selection List

电动机功率 Power (kW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	20	350	67.93	0.81	WR 47	4P	20
	22	329	63.77	0.87	WRF47	4P	20
	23	309	59.99	0.92			
	25	291	56.54	0.98			

- 1.选型参数表中的机型可与 该栏中的任一传动比搭配。
- 1.The machine types in the parameter selection list can match any transmission ratio in the column.

WR..1系列安装方位图/ WR..1series installation direction diagram

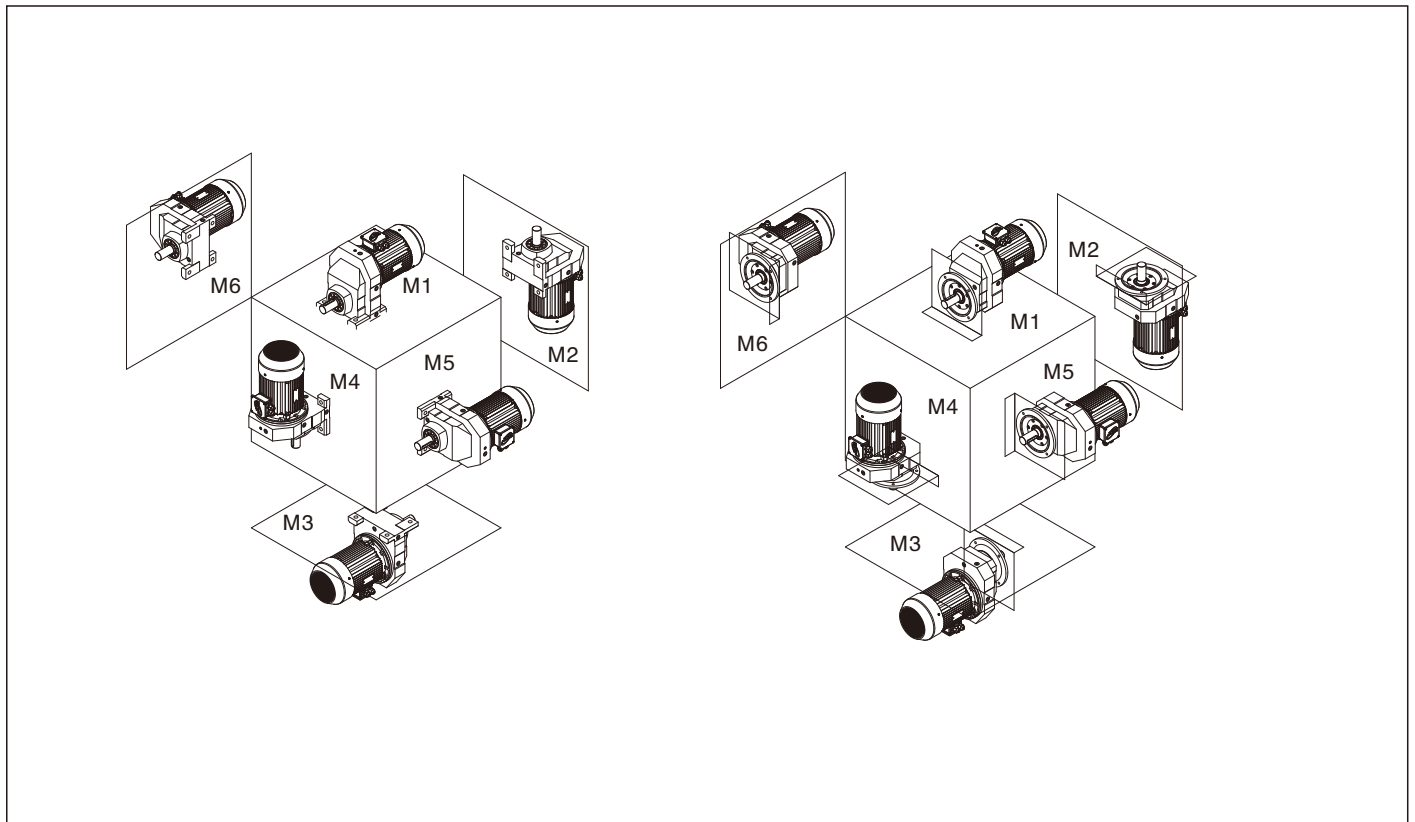

WR..1系列油量表(单位kg)/ WR..1 series oil capacity table (unit:kg)

机型号 安装方位	M1	M2	M3	M4	M5	M6
WR51	0.6	0.4	0.6	0.72	0.32	0.4
WR61	0.65	0.5	0.72	0.8	0.4	0.5
WR71	1.2	0.9	1.2	1.6	0.8	0.8
WR81	2	1.8	2	2.8	1.2	1.2
WR91	3	2	2.8	3.6	1.8	2
WR101	5.5	3.8	6	6.8	3.6	3.2

WR..1系列重量表/ WR..1 series weight table:


机型号/Type	WR51	WR61	WR 71	WR81	WR91	WR101
重量kg/Weight kg	7.5	13	22	33	61	80

注：表中重量为不加油时重量，带输入轴、输入法兰另加10%；带电机根据所配规格另加。

Note: Inside the table are the weights when oil is not added. Weight should be added with 10% when input shaft and connection flange are furnished; If there is a motor, please add weight according to motor type.

WUMA REDUCER / 午马减速机

WR系列安装方位图/WRseries installation direction diagram

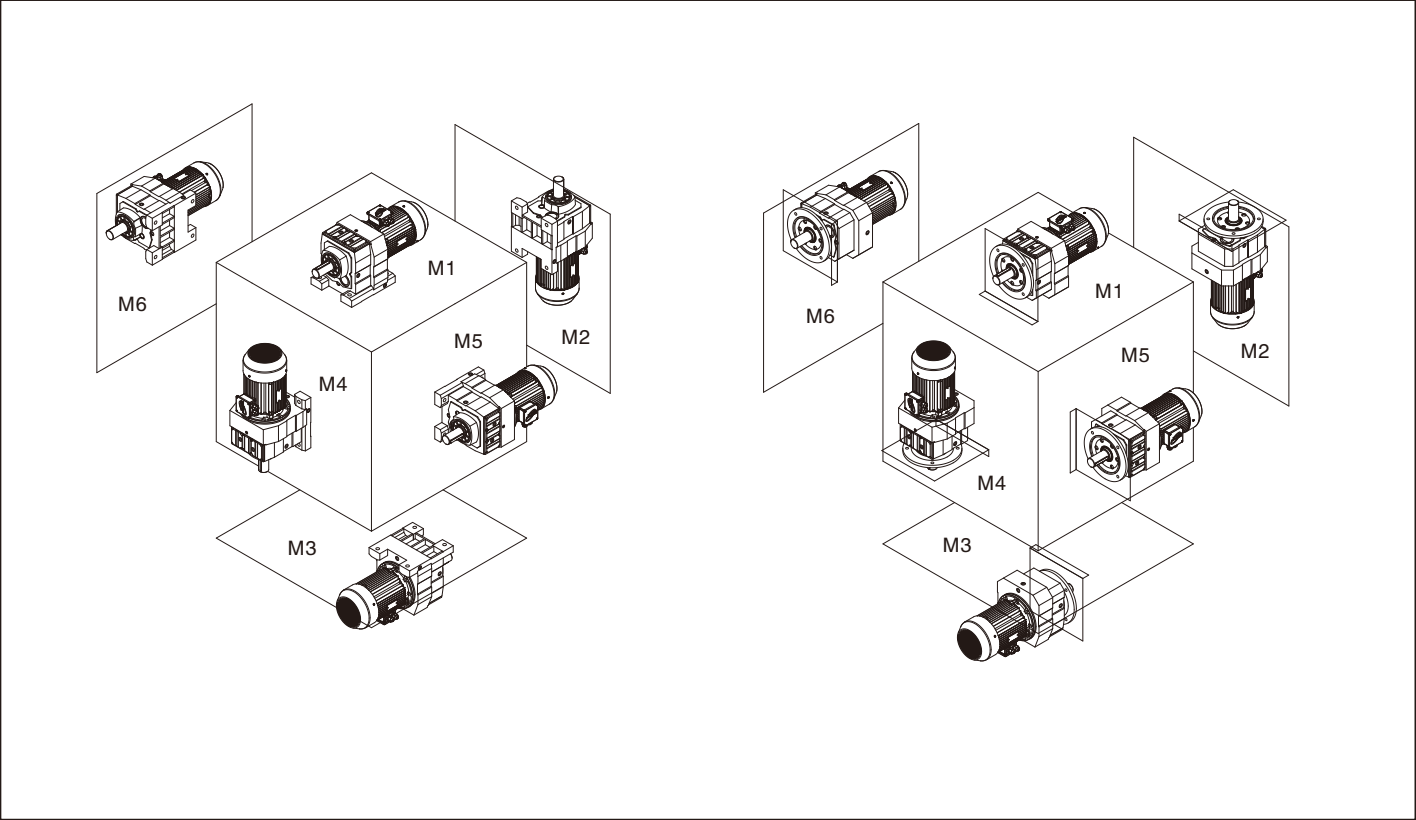

WR系列油量表(单位kg) /WR series oil capacity table (Unit:kg)


机型号 安装方位	M1	M2	M3	M4	M5	M6
WR17	0.3	0.6	0.4	0.7	0.4	0.4
WR27	0.8	0.8	1	1.1	0.8	1
WR37	0.8	0.8	1	1.1	0.8	1
WR47	1	1.6	1.5	1.7	1.5	1.5
WR57	1.1	1.9	1.7	2.1	1.7	1.7
WR67	1.3	2.6	2.8	3.2	1.8	2
WR77	1.6	3	3	3.3	2.1	2.3
WR87	3.6	6	6.5	7	5.7	5.9
WR97	4.5	10.9	10.7	12.5	10.3	10.6
WR107	6.4	17.4	18	20.5	14	17
WR137	10	28	29	31	25	25
WR147	16	45	48	52	40	41
WR167	29	80	78	88	66	69

WR系列重量表/WR series weight table



机型号/Type	WR17	WR27	WR37	WR47	WR57	WR67	WR77	WR87	WR97	WR107	WR137	WR147	WR167
重量kg/Weight kg	5	9	10	15	21	27	35	65	120	165	255	370	700

注：表中重量为不加油时重量，带输入轴、输入法兰另加10%；带电机根据所配规格另加。
Note: Weight in the table means the weight when oil is not added. When input shaft is furnished, 10% weight should be added; If there is a motor, please add weight according to motor type.


WR17-WR167安装形式图 WR17-WR167 Mounting position example

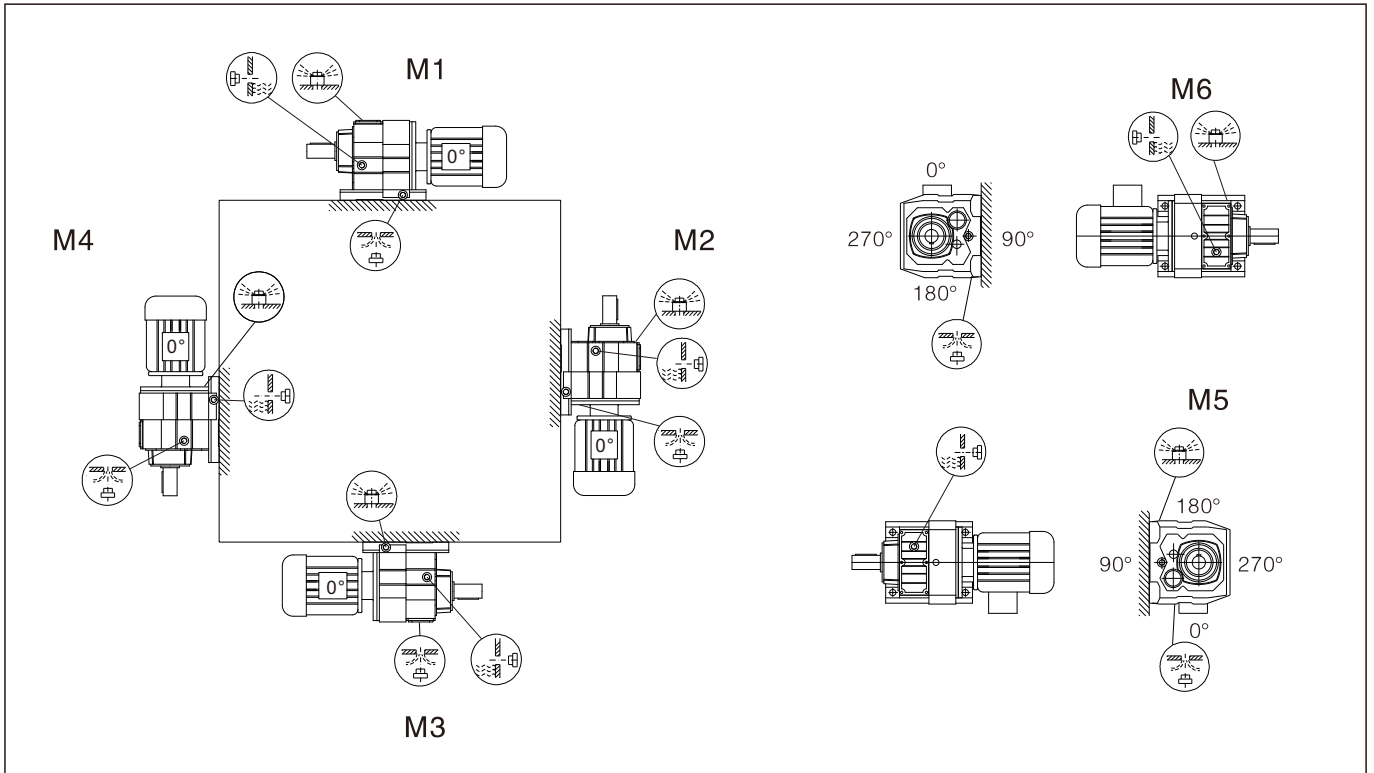



WRF17-WRF167安装形式图 WRF17-WRF167 Mounting position example

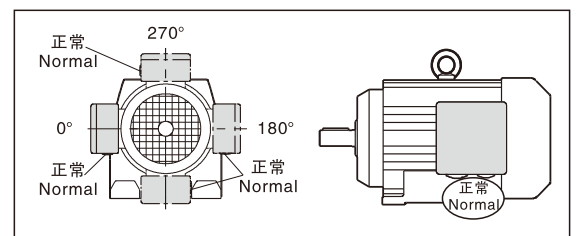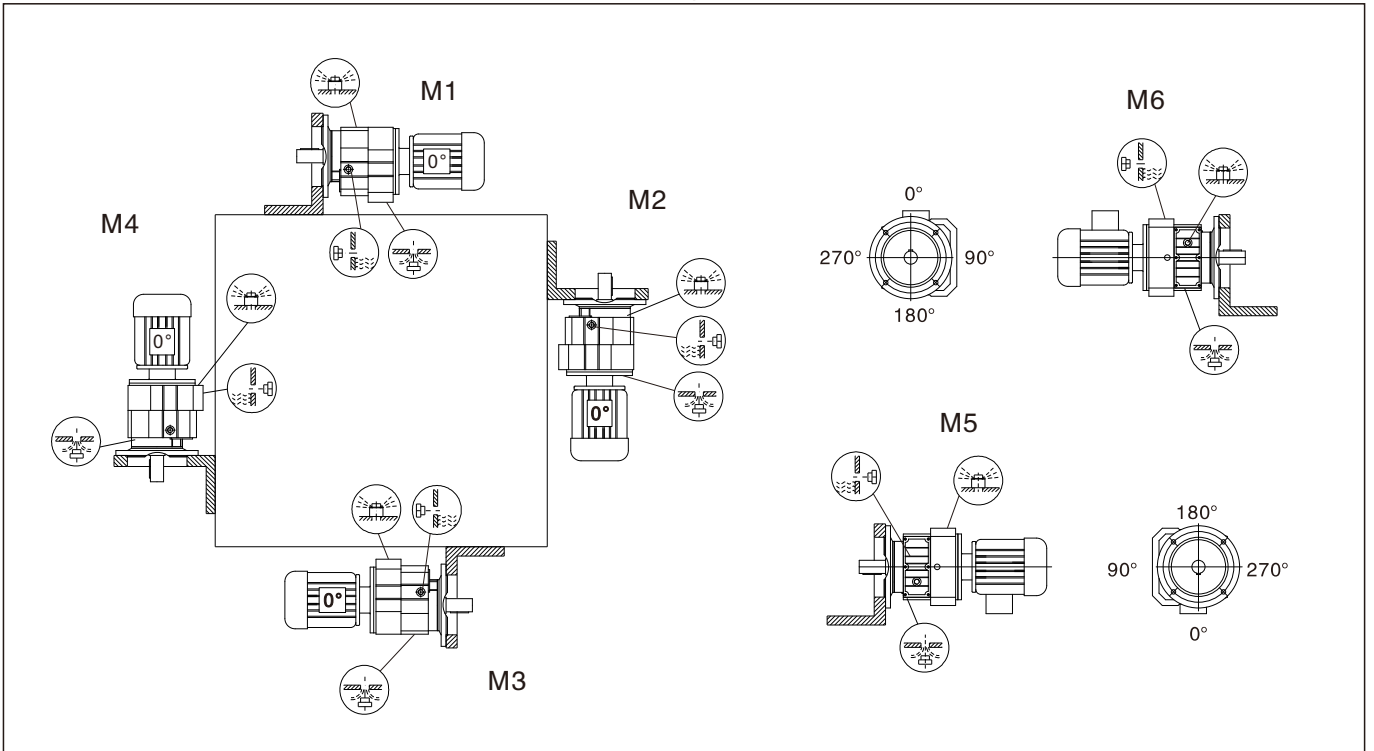

WR51-WR101安装形式图 WR51-WR101 Mounting position example

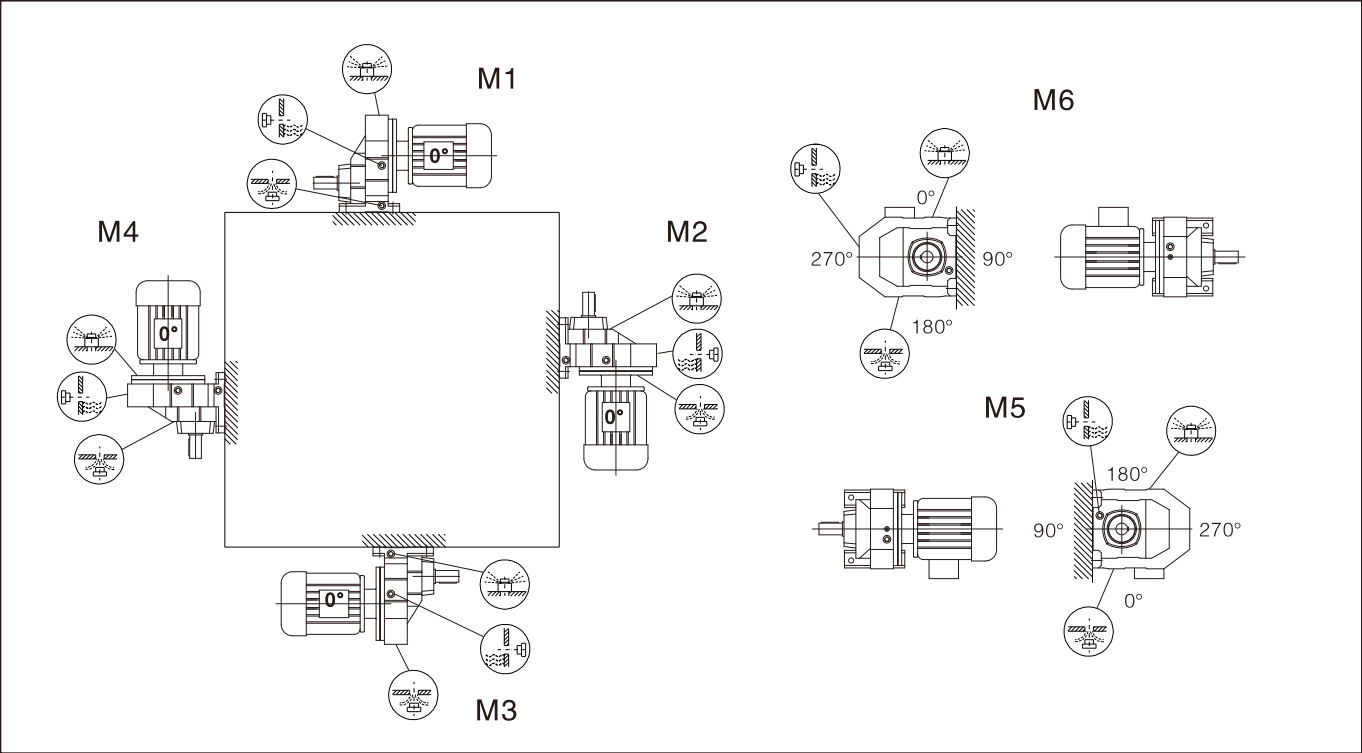

WRF51-WRF101安装形式图 WRF51-WRF101 Mounting position example

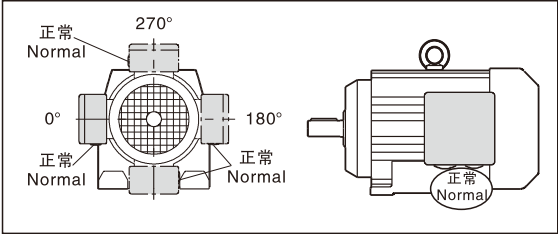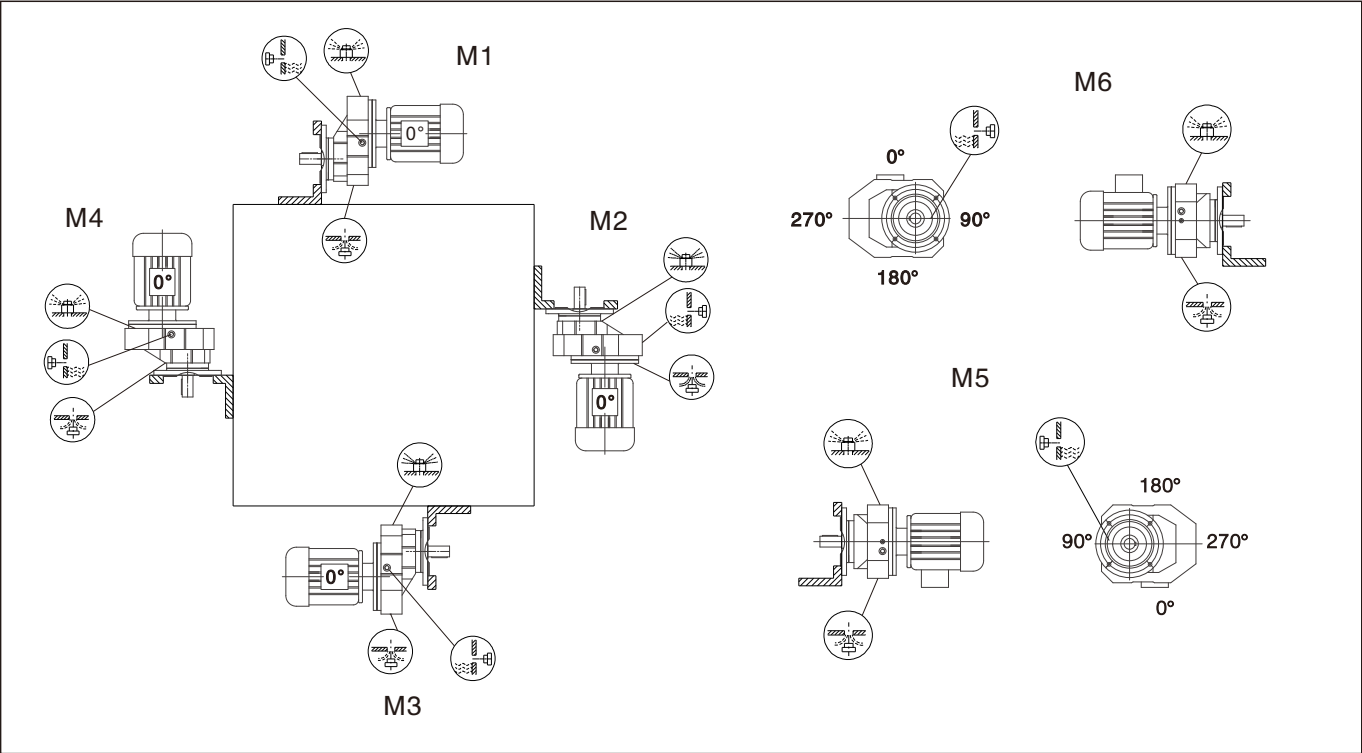

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
0.12KW						0.12KW									
0.06	14300	21342	0.90	WR147 WR77 WRF147WR77	4P	0.97	950	1430	0.85	WR77 WR37 WRF77WR37	4P				
0.08	12000	18210	1.10			1.1	900	1303	0.90						
0.09	10300	15923	1.25			1.2	770	1124	1.05						
0.10	9440	14075	1.40			1.3	715	1047	1.15						
0.11	7630	12344	1.70			1.5	615	915	1.35						
0.12	6780	11143	1.9			0.99	940	1394	0.85						
0.14	6020	9743	2.2			1.1	785	1218	1.05						
0.16	4960	8443	2.6			1.3	710	1084	1.15						
0.19	4290	7307	3.0			1.5	635	940	1.30						
0.21	3780	6447	3.4			1.7	505	821	1.60						
0.25	3270	5568	4.0	1.9	460	731	1.80								
						2.1	440	646	1.85						
0.11	8390	12921	0.95	WR137 WR77 WRF137WR77	4P	2.7	365	520	2.3						
0.12	7240	11712	1.10			3.1	310	451	2.6						
0.13	6430	10573	1.25			3.3	290	422	2.8						
0.16	5160	8784	1.55			3.8	245	365	3.3						
0.18	4270	7479	1.85												
0.21	4060	6559	1.95												
0.24	3330	5834	2.4												
0.27	3160	5116	2.5												
						1.4	655	956	0.90	WR67 WR37 WRF67WR37	4P				
0.18	4500	7583	0.95	1.5	605	891	1.00								
0.20	3850	6743	1.10	1.9	490	730	1.25								
0.23	3660	5914	1.20	2.1	425	644	1.40								
0.27	2950	5168	1.45	2.4	375	571	1.60								
0.31	2600	4435	1.65	2.8	315	486	1.90								
0.35	2310	3896	1.85	1.6	565	836	1.05								
0.45	1880	3039	2.3	1.8	475	750	1.25								
0.35	2670	3918	1.6	2.1	420	646	1.40								
0.41	2240	3343	1.9	2.4	380	574	1.55								
0.45	2030	3034	2.1	WR107 WR77 WRF107WR77	4P	2.8	330	495	1.80						
0.52	1750	2653	2.5			3.2	275	438	2.2						
0.61	1500	2280	2.9												
0.67	1300	2067	3.3												
						1.8	525	782	0.85	WR57 WR37 WRF57WR37	4P				
0.30	2950	4559	1.00			2.0	440	678	1.05						
0.34	2500	4004	1.20			2.3	395	604	1.15						
0.40	2200	3481	1.35			2.6	360	537	1.25						
0.29	3240	4678	0.90			2.9	315	471	1.45						
0.32	2970	4309	1.00			3.9	235	357	1.95						
0.37	2510	3702	1.20	4.3	205	319	2.2								
0.46	2010	3019	1.5	3.8	245	359	1.80								
0.52	1750	3668	1.70	4.3	225	324	2.0								
0.61	1440	2245	2.1	4.8	196	290	2.3								
0.68	1280	2016	2.3	5.3	177	262	2.5								
0.80	1160	1733	2.6	5.6	164	246	2.8								
0.45	2020	3065	1.5	6.3	144	220	3.1								
0.51	1790	2722	1.65												
0.60	1510	2311	2.0	WR97 WR57 WRF97WR57	4P	2.4	375	572	0.80	WR47 WR37 WRF47WR37	4P				
0.66	1360	2078	2.2			2.7	330	510	0.90						
0.76	1170	1823	2.6			3.2	275	436	1.10						
0.87	1020	1583	3.0			3.4	255	408	1.15						
0.99	860	1396	3.5			4.0	210	344	1.40						
1.1	740	1228	4.1			2.8	355	502	0.85						
						3.2	300	429	1.00						
0.48	1740	2873	0.90			3.7	255	372	1.15						
0.70	1260	1961	1.25			4.0	240	348	1.25						
0.50	1850	2770	0.85			4.6	205	301	1.50						
0.53	1730	2595	0.90	5.4	169	255	1.75								
0.65	1390	2129	1.10	6.1	150	228	2.0								
0.72	1240	1930	1.25	7.1	125	195	2.4								
0.80	1100	1733	1.40	WR87 WR57 WRF87WR57	4P										
0.79	1090	1737	1.40			4.1	220	338	0.90	WR37 WR17 WRF37WR17	4P				
0.91	960	1524	1.60			4.7	205	296	1.00						
1.1	775	1303	2.0			5.3	176	259	1.15						
1.2	680	1143	2.3			6.1	155	228	1.30						
1.6	555	885	2.8			6.9	134	199	1.50						
1.8	485	776	3.2			8.0	117	172	1.70						
2.0	430	685	3.6			4.2	230	328	0.90						
2.3	345	599	4.5			4.8	197	289	1.00						
						5.2	184	265	1.10						
						6.1	151	226	1.35						
						6.8	138	202	1.45						
						7.7	120	179	1.65						

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.12KW						0.12KW							
6.0	152	229	0.85	WR27 WR17 WRF27WR17	4P	10	112	135.09	1.15	WR27 WRF27	4P		
6.9	132	200	1.00			11	103	123.91	1.25				
7.8	116	177	1.10			13	88	105.49	1.50				
8.3	111	166	1.15			15	76	90.96	1.70				
6.1	151	227	0.85			16	70	84.78	1.85				
6.8	138	203	0.95			19	62	74.11	2.1				
7.7	121	179	1.10			20	58	69.47	2.2				
8.8	102	156	1.25			23	51	61.30	2.5				
4.6	250	195.24	3.3	WR77 WRF77	6P	25	46	55.87	2.8	WR17 WRF17	6P		
5.4	210	166.59	3.9			29	40	48.17	3.2				
6.2	186	145.67	4.4			31	37	44.90	3.5				
4.5	255	199.81	2.4	11	104	81.64	0.80	WR17 WRF17	6P				
4.9	235	184.07	2.6	13	90	70.39	0.95						
5.7	200	158.14	3.0	14	84	65.61	1.00						
6.5	175	137.67	3.4	16	73	57.35	1.15						
7.0	164	128.97	3.7	17	68	53.76	1.25						
7.9	145	113.94	4.1	19	60	47.44	1.40						
6.9	166	199.81	3.6	WR67 WRF67	4P	17	68	81.64	1.25			WR17 WRF17	4P
7.5	153	184.07	3.9			20	58	70.39	1.45				
4.8	240	186.89	1.90			21	55	65.61	1.55				
5.2	220	172.17	2.0			24	48	57.35	1.80				
6.1	188	147.92	2.4	26	45	53.76	1.90						
7.0	164	128.77	2.7	29	39	47.44	2.2						
7.5	154	120.63	2.9	31	37	44.18	2.3						
8.4	136	106.58	3.3	36	32	38.61	2.7						
9.1	126	98.99	3.6	38	30	36.20	2.8						
7.4	155	186.89	2.9	WR57 WRF57	6P	43	27	31.94	3.2				
8.0	143	172.17	3.2			49	24	28.32	3.6				
9.3	123	147.92	3.7			57	20	24.07	4.2				
11	107	128.77	4.2			55	21	25.23	4.1				
5.1	225	176.88	1.35	WR57 WRF57	4P	60	19	23.15	4.4	WR17 WRF17	4P		
5.5	210	162.94	1.45			70	16	19.71	5.2				
6.4	178	139.99	1.70			81	14	16.99	6.0				
7.4	155	121.87	1.95			87	13	15.84	6.4				
7.8	147	176.88	2.0	WR47 WRF47	6P	100	12	13.84	7.4				
8.5	135	162.94	2.2			106	11	12.98	7.9				
9.9	116	139.99	2.6			121	9.5	11.45	8.5				
11	101	121.87	3.0			136	8.4	10.15	9.2				
12	95	114.17	3.2			160	7.2	8.63	10				
14	84	100.86	3.6			183	6.3	7.55	8.9				
15	78	93.68	3.9			196	5.8	7.04	9.5				
6.7	172	134.82	1.15			WR47 WRF47	4P	224	5.1	6.15	11		
7.3	157	123.66	1.25					239	4.8	5.76	11		
8.6	134	105.28	1.50	271	4.2			5.09	12				
9.9	116	90.77	1.75	306	3.7			4.51	13				
11	108	84.61	1.85	360	3.2			3.83	14				
12	94	73.96	2.1	WR37 WRF37	6P	227	5.0	6.07	8.6	WR61 WRF61	4P		
10	112	134.82	1.80			267	4.3	5.18	17				
11	103	123.66	1.95			305	3.8	4.53	22				
13	87	105.28	2.3			321	3.6	4.30	22				
15	75	90.77	2.7			251	4.6	5.50	8.5			WR51 WRF51	4P
16	70	84.61	2.8			272	4.2	5.07	8.6				
19	61	73.96	3.3			317	3.6	4.35	19				
7.3	158	123.91	0.80			364	3.1	3.79	22				
8.5	134	105.49	0.95			389	2.9	3.55	24				
9.9	116	90.96	1.10			440	2.6	3.14	25				
11	108	84.78	1.20	474	2.4	2.91	28						
12	94	74.11	1.40	523	2.2	2.64	31						
				WR27 WRF27	6P	582	2.0	2.37	35				
						676	1.7	2.04	41				
						719	1.6	1.92	43				
						835	1.4	1.65	49				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.18KW						0.18KW					
0.09	15500	14075	0.85	WR147 WR77 WRF147WR77	4P	1.5	950	858	0.85	WR77 WR37 WRF77WR37	4P
0.11	12900	12344	1.00			1.7	830	575	1.00		
0.12	11600	11143	1.10			2.0	735	671	1.10		
0.14	10200	9743	1.25			2.3	620	571	1.35		
0.16	8590	8443	1.50			1.6	870	821	0.95		
0.18	7430	7307	1.75			1.8	780	731	1.05		
0.20	6560	6447	2.0			2.0	720	646	1.15		
0.24	5660	5568	2.3			2.4	625	560	1.30		
0.27	5120	4926	2.5			2.7	530	488	1.55		
0.31	4430	4325	2.9			3.0	470	436	1.75		
0.35	3900	3754	3.3	WR137 WR77 WRF137WR77	4P	3.5	405	373	2.0	WR67 WR37 WRF67WR37	4P
0.40	3380	3302	3.8			4.0	355	327	2.3		
0.15	8930	8784	0.90			4.6	320	289	2.6		
0.18	7490	7479	1.05			2.3	625	571	0.95		
0.20	6880	6559	1.15			2.7	525	486	1.15		
0.23	5840	5834	1.35			2.3	635	574	0.95		
0.26	5370	5116	1.50			2.7	545	495	1.10		
0.30	4540	4464	1.75			3.0	465	438	1.30		
0.34	4000	3928	2.0			3.4	415	388	1.45		
0.28	5260	4709	1.50			3.8	380	344	1.60		
0.33	4450	4018	1.80	WR107 WR77 WRF107WR77	4P	4.5	310	294	1.95	WR57 WR37 WRF57WR37	4P
0.38	3850	3514	2.1			5.1	280	261	2.1		
0.40	3640	3338	2.2			2.9	490	454	0.90		
0.45	3160	2929	2.5			3.2	445	410	1.00		
0.30	4510	4435	0.95			2.8	520	471	0.85		
0.34	3990	3896	1.10			3.7	390	357	1.15		
0.43	3190	3039	1.35			4.1	345	319	1.30		
0.34	4380	3918	1.00			4.8	290	273	1.55		
0.39	3700	3343	1.15			5.5	255	241	1.75		
0.44	3360	3034	1.30			6.1	225	215	2.0		
0.50	2910	2653	1.50	WR97 WR57 WRF97WR57	4P	3.7	405	359	1.10	WR37 WR17 WRF37WR17	4P
0.58	2500	2280	1.70			4.1	365	324	1.25		
0.64	2200	2067	1.95			4.6	325	290	1.40		
0.66	2050	1987	2.1			5.0	295	262	1.55		
0.72	1840	1827	2.3			5.3	275	246	1.65		
0.83	1580	1599	2.7			6.0	240	220	1.85		
0.94	1410	1400	3.1			7.0	205	188	2.2		
1.1	1210	1226	3.6			8.3	172	159	2.6		
0.49	2920	2668	1.05	WR87 WR57 WRF87WR57	4P	4.4	335	301	0.90	WR27 WR17 WRF27WR17	4P
0.59	2420	2245	1.25			5.2	285	255	1.05		
0.65	2160	2016	1.40			5.8	250	228	1.20		
0.76	1920	1733	1.55			6.8	210	195	1.40		
0.81	1790	1623	1.70			6.6	220	199	0.90		
0.92	1570	1434	1.90			7.7	192	172	1.05		
1.1	1300	1207	2.3			8.8	167	150	1.20		
1.2	1160	1084	2.6			5.8	250	226	0.80		
1.4	990	934	3.0			6.5	230	202	0.90		
1.5	920	878	3.2			7.4	200	179	1.00		
1.8	785	755	3.8	WR77 WRF77	6P	8.5	171	156	1.15		
0.49	2980	2722	1.00			9.4	153	141	0.85		
0.57	2520	2311	1.20			11	135	124	0.95		
0.64	2270	2078	1.30			12	121	110	1.10		
0.76	1850	1733	0.85			14	102	94	1.30		
0.89	1650	1489	0.95			9.8	148	135	0.90		
0.95	1540	1395	1.00			11	134	118	0.95		
1.1	1350	1232	1.15			13	117	104	1.10		
1.1	1250	1145	1.25			15	101	90	1.30		
1.3	1120	1037	1.40			4.5	385	195.24	2.1		
1.4	1000	931	1.55			5.2	330	166.59	2.5		
1.6	850	802	1.85			6.0	290	145.67	2.8		
0.76	1850	1737	0.85			6.3	275	138.39	3.0		
0.87	1620	1524	0.95			7.2	240	121.42	3.4		
1.0	1350	1303	1.15								
1.2	1180	1143	1.30								
1.5	940	885	1.65								
1.7	830	776	1.90								

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
0.18KW						0.18KW									
6.8	255	195.24	3.2	WR77 WRF77	4P	11	161	123.91	0.80	WR27 WRF27	4P				
7.9	215	166.59	3.8			13	137	105.49	0.95						
9.1	190	145.67	4.3			15	118	90.96	1.10						
9.5	180	138.39	4.6			16	110	84.78	1.20						
						18	97	74.11	1.35						
				19	91	69.47	1.45								
4.3	395	199.81	1.50	WR67 WRF67	6P	22	80	61.30	1.65						
4.7	365	184.07	1.65			24	73	55.87	1.80						
5.5	310	158.14	1.90			27	63	48.17	2.1						
6.3	270	137.67	2.2			29	59	44.90	2.2						
6.8	255	128.97	2.3			34	51	39.25	2.5						
7.6	225	113.94	2.7			36	48	36.79	2.7						
8.2	210	105.83	2.9			41	42	32.47	3.1						
9.1	190	95.91	3.2			46	38	28.78	3.5						
10	170	86.11	3.5			54	32	24.47	4.1						
12	147	74.17	4.1			47	37	28.37	3.5						
12	138	69.75	4.3	51	34	26.09	3.8								
6.6	260	199.81	2.3	WR67 WRF67	4P	59	29	22.32	4.5						
						68	25	19.35	5.2						
						73	24	18.08	5.5						
						84	20	15.63	6.4						
						99	17	13.28	7.5						
						16	106	81.64	0.80						
19	92	70.39	0.95	WR17 WRF17	4P										
20	85	65.61	1.00												
23	75	57.35	1.15												
25	70	53.76	1.20												
28	62	47.44	1.40												
30	58	44.18	1.50												
34	50	38.61	1.70												
36	47	36.20	1.80												
41	42	31.94	2.0												
47	37	28.32	2.3												
55	31	24.07	2.7												
52	33	25.23	2.6												
57	30	23.15	2.8												
67	26	19.71	3.3												
78	22	16.99	3.8												
83	21	15.84	4.1												
95	18	13.84	4.7												
102	17	12.98	5.0												
115	15	11.45	5.4												
130	13	10.15	5.8												
153	11	8.63	6.4												
175	9.8	7.55	5.7												
188	9.2	7.04	6.0												
215	8.0	6.15	6.8												
229	7.5	5.76	7.1												
259	6.6	5.09	7.7												
293	5.9	4.51	8.1												
344	5.0	3.83	9.0												
268	6.4	10.15	12			WR17 WRF17	2P	315	5.5	8.63	13				
				360	4.8			7.55	12						
				387	4.4			7.04	13						
				442	3.9			6.15	14						
				472	3.6			5.76	15						
				535	3.2			5.09	16						
				603	2.8			4.51	17						
				710	2.4			3.83	19						
				9.8	176			134.82	1.15	WR37 WRF37	4P	11	161	123.66	1.25
				13	137			105.28	1.45			15	118	90.77	1.70
				16	110			84.61	1.80			18	96	73.96	2.1
				18	96			73.96	2.1			19	90	69.33	2.2
19	90	69.33	2.2	22	80	61.18	2.5								
24	73	55.76	2.8	27	63	48.08	3.2								

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.18KW						0.25KW							
143	12	6.07	3.6	WR61 WRF61	6P	0.93	2100	1400	2.0	WR107 R77 WRF107R77	4P		
168	10	5.18	7.3			1.1	1810	1226	2.4				
192	8.9	4.53	9.2			1.4	1410	939	3.0				
202	8.5	4.30	9.4			1.6	1220	822	3.5				
218	7.9	6.07	5.4	WR61 WRF61	4P	0.64	3160	2016	0.95	WR97 WR57 WRF97WR57	4P		
255	6.7	5.18	11			0.75	2780	1733	1.10				
292	5.9	4.53	14			0.80	2590	1623	1.15				
307	5.6	4.30	14			0.71	2870	1823	1.05				
350	4.9	3.77	18			0.82	2490	1583	1.20				
413	4.2	3.20	24			0.93	2160	1396	1.40				
457	3.8	2.89	28			1.1	1880	1228	1.60				
519	3.3	2.54	36			1.2	1700	1069	1.75				
550	3.1	2.40	40			1.4	1480	938	2.0				
646	2.7	2.04	50			1.6	1260	824	2.4				
158	11	5.50	3.6	WR51 WRF51	6P	1.8	1130	737	2.7	WR87 WR57 WRF87WR57	4P		
172	10	5.07	3.6			2.1	970	632	3.1				
200	8.6	4.35	7.9			1.1	1810	1145	0.85				
230	7.5	3.79	9.2			1.2	1630	1037	0.95				
240	7.2	5.50	5.4	WR51 WRF51	4P	1.4	1460	931	1.05	WR87 WR57 WRF87WR57	4P		
261	6.6	5.07	5.4			1.6	1250	802	1.25				
303	5.7	4.35	12			1.1	1750	1143	0.90				
348	4.9	3.79	14			1.5	1380	885	1.10				
372	4.6	3.55	15			1.7	1210	776	1.30				
421	4.1	3.14	16			1.9	1070	685	1.45				
453	3.8	2.91	18			2.2	900	599	1.70				
500	3.4	2.64	20			2.5	795	525	1.95				
557	3.1	2.37	22			2.8	695	456	2.2				
647	2.7	2.04	26			4.9	405	268	3.8				
688	2.5	1.92	28	WR147 R77 WRF147R77	4P	2.3	900	571	0.90	WR77 WR37 WRF77WR37	4P		
799	2.2	1.65	31			2.3	900	560	0.90				
0.25KW						2.7	775	488	1.05				
0.13	15000	9743	0.85			3.0	690	436	1.20				
0.15	12700	8443	1.00			3.5	590	373	1.40				
0.18	11000	7307	1.20			4.0	520	327	1.60				
0.20	9700	6447	1.35			4.5	460	289	1.80				
0.23	8380	5568	1.55			5.0	410	260	2.0				
0.26	7520	4926	1.75			5.8	345	224	2.4				
0.30	6540	4325	2.0			3.3	605	388	1.00				
0.35	5730	3754	2.3	3.8	550	344	1.10						
0.39	4990	3302	2.6	4.4	455	294	1.30						
0.45	4360	2898	3.0	5.0	410	261	1.45						
0.22	8680	5834	0.90	5.6	370	234	1.60	WR67 R37 WRF67R37	4P				
0.25	7860	5116	1.00	6.5	315	200	1.90						
0.29	6720	4464	1.20	7.4	270	176	2.2						
0.33	5910	3928	1.35	8.2	245	158	2.5						
0.28	7600	4709	1.05	3.4	630	384	0.95						
0.32	6440	4018	1.25	3.6	585	359	1.05						
0.37	5590	3514	1.45	4.2	505	310	1.20						
0.39	5290	3338	1.50	4.9	425	264	1.40						
0.44	4610	2929	1.75	5.5	375	235	1.60						
0.49	4090	2658	1.95	6.5	320	201	1.90						
0.54	3710	2412	2.2	7.2	290	181	2.1	WR57 R37 WRF57R37	4P				
0.63	3190	2073	2.5	4.1	505	319	0.90						
0.71	2760	1839	2.9	4.8	425	273	1.05						
0.93	2130	1397	3.8	5.4	375	241	1.20						
1.1	1850	1226	4.3	6.1	335	215	1.35						
0.43	4670	3039	0.90	6.9	295	187	1.55						
0.43	4860	3034	0.90	7.9	255	164	1.75						
0.65	3030	1987	1.40	9.2	220	142	2.0						
0.71	2740	1827	1.55	4.0	530	324	0.85						
0.81	2370	1599	1.80	4.5	470	290	0.95						
				5.0	425	262	1.05						
				5.3	395	246	1.15						
				5.9	355	220	1.30						

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	
0.25KW						0.25KW						
5.7	365	228	0.80	WR47 R37 WRF47R37	4P	8.3	290	106.58	1.55	WR57 WRF57	6P	
6.7	310	195	0.95			8.9	270	98.99	1.70			
7.1	290	182	1.05									
8.5	240	154	1.25									
8.7	240	150	0.85	WR37 R17 WRF37 R17	4P	7.0	345	186.89	1.30	WR57 WRF57	4P	
10	205	130	0.95			7.6	315	172.17	1.40			
10	196	124	1.00			8.8	270	147.92	1.65			
12	174	110	1.15			10	235	128.77	1.90			
14	148	94	1.35			11	220	120.63	2.0			
8.4	250	156	0.80			12	196	106.58	2.3			
9.7	215	135	0.95			13	182	98.99	2.5			
10	210	127	0.95			14	165	89.71	2.7			
13	169	104	1.20			16	148	80.55	3.0			
14	146	90	1.35			19	127	69.23	3.5			
2.3	1020	289.74	3.0	WR97 WRF97	8P	7.3	325	176.88	0.90	WR47 WRF47	4P	
2.7	900	255.71	3.3			8.0	300	162.94	1.00			
2.8	850	241.25	3.5			9.3	255	139.99	1.15			
3.1	760	216.28	4.0			11	225	121.87	1.35			
2.8	870	246.54	1.80	WR87 WRF87	8P	11	210	114.17	1.45			
3.1	760	216.54	2.0			13	185	100.86	1.60			
3.3	720	205.71	2.2			14	172	93.68	1.75			
3.7	640	181.77	2.4			15	156	84.90	1.90			
4.1	585	166.49	1.40			17	140	76.23	2.1			
4.7	510	145.67	1.60			19	126	68.54	2.4			
4.9	485	138.39	1.70			20	118	64.21	2.5			
5.6	425	121.42	1.90			23	104	56.73	2.9			
4.5	530	195.24	1.55	WR77 WRF77	8P	25	97	52.69	3.1			
5.3	450	166.59	1.80			27	88	47.75	3.4			
6.0	395	145.67	2.1			9.6	250	134.82	0.80			
6.7	360	195.24	2.3			11	225	123.66	0.90			
7.8	305	166.59	2.7			12	193	105.28	1.05			
8.9	270	15.67	3.1			14	167	90.77	1.20			
9.4	255	138.39	3.2			15	155	84.61	1.30			
11	225	121.42	3.7			18	136	73.96	1.45			
4.3	555	158.14	1.10	WR67 WRF67	8P	19	127	69.33	1.55			
4.9	485	137.67	1.25			21	112	61.18	1.80			
5.3	455	128.97	1.35			23	102	55.76	1.95			
6.0	400	113.94	1.50			27	88	48.08	2.3			
4.4	540	199.81	1.10			29	82	44.81	2.4			
4.8	500	184.07	1.20			33	72	39.17	2.8			
5.6	430	158.14	1.40			35	67	36.72	3.0			
6.4	375	137.67	1.60			40	60	32.40	3.4			
6.8	350	128.97	1.70	WR67 WRF67	6P	15	156	84.78	0.85			
7.7	310	113.94	1.95			18	136	74.11	0.95			
8.3	285	105.83	2.1			19	128	69.47	1.00			
6.5	365	199.81	1.65			21	113	61.30	1.15			
7.1	340	184.07	1.80			23	103	55.87	1.25			
8.2	290	158.14	2.1			27	89	48.17	1.45			
9.4	255	137.67	2.4			29	83	44.90	1.60			
10	235	128.97	2.5			33	72	39.25	1.80			
11	210	113.94	2.9			35	68	36.79	1.90			
12	194	105.83	3.1			40	60	32.47	2.2			
14	176	95.91	3.4			45	53	28.78	2.5			
15	158	86.11	3.8			53	45	24.47	2.9			
4.7	505	186.89	1.90	WR57 WRF57	6P	46	52	28.37	2.5			
5.1	465	172.17	1.95			50	48	26.09	2.7			
5.9	400	147.92	1.10			58	41	22.32	3.2			
6.8	350	128.77	1.30			67	36	19.35	3.7			
7.3	325	120.63	1.35			72	33	18.08	3.9			
						83	29	15.63	4.5			
						98	24	13.28	5.3			
						110	22	11.86	5.9			
				128	19	10.13	6.6					
				138	17	9.41	7.1					
				159	15	8.16	7.7					
				170	14	7.63	8.0					
				197	12	6.59	8.8					

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	
0.25KW						0.25KW						
232	10	5.60	9.6	WR27 WRF27	4P	637	3.7	2.04	19	WR51 WRF51	4P	
260	9.2	5.00	10			677	3.5	1.92	20			
304	7.8	4.27	11			787	3.0	1.65	23			
325	7.3	4.00	12			0.37KW						
386	6.2	3.37	13			0.19	15800	7307	0.80	WR147 R77 WRF147R77	4P	
23	105	57.35	0.80	0.21	14000	6447	0.95					
24	99	53.76	0.85	0.25	12100	5568	1.10					
27	87	47.44	1.00	0.28	10800	4926	1.20					
29	81	44.18	1.05	0.32	9400	4325	1.40					
34	71	38.61	1.20	0.37	8210	3754	1.60					
36	67	36.20	1.30	0.42	7180	3302	1.80					
41	59	31.94	1.45	0.48	6280	2898	2.1					
46	52	28.32	1.65	WR17 WRF7	4P	0.31	9670	4464	0.85	WR137 R77 WRF137R77	4P	
54	44	24.07	1.90			0.35	8510	3928	0.95			
52	46	25.23	1.85			0.34	9140	4018	0.90			
56	43	23.15	2.0			0.39	7950	3514	1.00			
66	36	19.71	2.3			0.41	7540	3338	1.05			
77	31	16.99	2.7			0.47	6580	2929	1.20			
82	29	15.84	2.9			0.56	5540	2484	1.45			
94	25	13.84	3.3			0.62	4980	2242	1.60			
100	24	12.98	3.6			0.52	5880	2658	1.35			
114	21	11.45	3.9			0.57	5330	2412	1.50			
128	19	10.15	4.1			0.67	4580	2073	1.75			
151	16	8.63	4.6			0.75	3990	1839	2.0			
172	14	7.55	4.0			0.99	3070	1397	2.6			
185	13	7.04	4.3			1.1	2670	1226	3.0			
211	11	6.15	4.8			1.3	2400	1090	3.3			
226	11	5.76	5.0			1.5	2090	951	3.8			
256	9.3	5.09	5.5	WR17 WRF17	2P	0.67	4610	2067	0.95	WR107 WR77 WRF107WR77	4P	
288	8.3	4.51	5.8			0.82	3760	1693	1.15			
339	7.0	3.83	6.4			0.89	3410	1550	1.25			
433	5.5	615	9.8			0.98	3090	1407	1.40			
461	5.2	5.76	10			1.1	2660	1209	1.60			
523	4.6	5.09	11			1.3	2320	1055	1.85			
590	4.0	4.51	12			0.69	4370	1987	1.00			
694	3.4	3.83	13	0.76	3970	1827	1.10	WR97 WR57 WRF97WR57	4P			
145	17	6.07	2.6	0.86	3440	1599	1.25					
	170	14	5.18	5.4	0.99	3040	1400			1.40		
	194	12	4.53	6.7	1.1	2640	1226			1.65		
	205	12	4.30	6.8	1.5	2040	939			2.1		
214	11	6.07	3.9	1.7	1770	822	2.4			WR61 WRF61	4P	
	251	9.5	5.18	7.9	0.96	3240	1434					0.95
	287	8.3	4.53	9.9	1.1	2710	1207					1.10
	302	7.9	4.30	10	1.3	2430	1084					1.25
	345	6.9	3.77	13	0.99	3100	1396					0.95
	406	5.9	3.20	17	1.1	2710	1228	1.10				
	450	5.3	2.89	20	1.3	2410	1069	1.25				
	511	4.7	2.54	25	1.5	2110	938	1.40				
	542	4.4	2.40	28	1.7	1820	824	1.65				
636	3.8	2.04	35	1.9	1630	737	1.85	WR51 WRF51	6P			
160	15	5.50	2.6	2.2	1390	632	2.2					
	174	14	5.07	2.6	3.2	960	431			3.1		
	202	12	4.35	5.8	3.6	840	379			3.6		
	232	10	3.79	6.7	4.1	745	336			4.0		
236	10	5.50	3.9	WR51 WRF51	4P	1.7	1780	802	0.85	WR87 WR57 WRF87WR57	4P	
	257	9.3	5.07			3.9	1.8	1670	754			0.95
	299	8.0	4.35			8.5	2.1	1430	649			1.1
	343	7.0	3.79			9.9	1.8	1730	776			0.90
	366	6.5	3.55			11	2.0	1530	685			1.00
	414	5.8	3.14			11	2.3	1310	599			1.20
	446	5.3	2.91			13	2.6	1150	525			1.35
	492	4.8	2.64			14	3.0	1000	456			1.55
	548	4.4	2.37			16	5.2	585	268			2.7

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.37KW						0.37KW							
5.8	515	236	3.0	WR87 WR57 WRF87WR57	4P	13	270	105.83	2.2	WR67 WRF67	4P		
2.6	1230	538	1.25			14	245	95.91	2.4				
2.9	1080	472	1.45			16	220	86.11	2.7				
3.5	910	400	1.70			19	190	74.17	3.2				
3.8	810	361	1.90			20	179	69.75	3.4				
						23	157	61.26	3.8				
						24	146	56.89	4.1				
3.2	980	436	0.85	WR77 WR37 WRF77WR37	4P	7.0	505	128.77	0.90	WR57 WRF57	6P		
3.7	840	373	0.95			7.5	475	120.63	0.95				
4.2	740	327	1.10			8.4	420	106.58	1.10				
4.8	655	289	1.25			9.1	390	98.99	1.15				
5.3	585	260	1.40										
6.2	500	224	1.65										
7.0	435	197	1.90										
8.1	380	169	2.2										
9.3	335	149	2.5										
4.7	650	294	0.90	WR67 WR37 WRF67WR37	4P	7.4	480	186.89	0.95	WR57 WRF57	4P		
5.3	585	261	1.00			8.0	440	172.17	1.00				
5.9	525	234	1.15			9.3	380	147.92	1.20				
6.9	450	200	1.35			11	330	128.77	1.35				
				11	310	120.63	1.45						
				13	275	106.58	1.65						
				14	255	98.99	1.80						
				15	230	89.71	1.95						
				17	205	80.55	2.2						
				20	177	69.23	2.5						
				21	166	64.85	2.7						
				24	147	57.29	3.1						
				26	136	53.22	3.3						
				29	124	48.23	3.6						
						9.9	360	139.99	0.85			WR47 WRF47	4P
						11	310	121.87	0.95				
						12	290	114.17	1.05				
						14	260	100.86	1.15				
						15	240	93.68	1.25				
						16	215	84.90	1.40				
						18	195	76.23	1.55				
						20	176	68.54	1.70				
						21	164	64.21	1.80				
						24	145	56.73	2.1				
						26	135	52.69	2.2				
						29	122	47.75	2.5				
						32	110	42.87	2.7				
						37	95	36.93	3.2				
						40	89	34.73	3.4				
						41	87	33.79	2.8				
						44	80	31.12	2.8				
						52	69	26.74	4.4				
						59	60	13.28	5.0				
						63	56	21.81	5.4				
						15	230	90.77	0.85	WR37 WRF37	4P		
						16	215	84.61	0.90				
						19	189	73.96	1.05				
						20	178	69.33	1.15				
						23	157	61.18	1.30				
						25	143	55.76	1.40				
						29	123	48.08	1.60				
						31	115	44.81	1.75				
						35	100	39.17	2.0				
						38	94	36.72	2.1				
						43	83	32.40	2.4				
						48	74	28.73	2.7				
						57	63	24.42	3.2				
						49	73	28.32	2.8				
						53	67	26.03	2.8				
						62	57	22.27	3.5				
						71	49	19.31	4.1				
						76	46	18.05	4.3				
						88	40	15.60	5.0				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.37KW						0.37KW							
104	34	13.25	5.6	WR37	4P	575	6.1	2.40	20	WR61	4P		
117	30	11.83	6.0	WRF37		675	5.2	2.04	26	WRF61			
23	157	61.30	0.85	WR27 WRF27	4P	207	17	4.35	4.0	WR51 WRF51	6P		
25	143	55.87	0.90			238	15	3.79	4.6				
29	123	48.17	1.05			254	14	3.55	5.0				
31	115	44.90	1.15										
35	101	39.25	1.30										
38	94	36.79	1.40										
43	83	32.47	1.55										
48	74	28.78	1.75										
56	63	24.47	2.1										
49	73	28.37	1.80										
53	67	26.09	1.95										
62	57	22.32	2.3										
71	50	19.35	2.6										
76	46	18.08	2.8										
88	40	15.63	3.2										
104	34	13.28	3.8										
						0.55KW							
36	99	38.61	0.85	WR17 WRF17	4P	0.22	19800	6077	0.90	WR167 WR97 WRF167WR97	4P		
38	93	36.20	0.90			0.25	17600	5407	1.00				
43	82	31.94	1.05			0.29	15100	4650	1.20				
49	73	28.32	1.15			0.33	13300	4129	1.35				
57	62	24.07	1.40										
55	65	25.23	1.30										
60	59	23.15	1.45										
70	51	19.71	1.70										
81	44	16.99	1.95										
87	41	15.84	2.1										
100	35	13.84	2.4										
106	33	12.98	2.6										
121	29	11.45	2.8										
136	26	10.15	3.0										
160	22	8.63	3.3										
183	19	7.55	2.9										
196	18	7.04	3.1										
224	16	6.15	3.4										
239	15	5.76	3.6										
271	13	5.09	3.9										
306	12	4.51	4.2										
360	9.8	3.83	4.6										
191	19	13.84	4.6	WR17 WR17	2P	0.55	8540	2484	0.95	WR137 WR77 WRF137WR77	4P		
204	17	12.98	4.9			0.51	9080	2658	0.90				
231	15	11.45	5.3			0.56	8240	2412	0.95				
261	14	10.15	5.7			0.66	7090	2073	1.15				
307	12	8.63	6.3			0.74	6210	1839	1.30				
351	10	7.55	5.5			0.85	5350	1598	1.50				
377	9.4	7.04	5.8			0.97	4760	1397	1.70				
431	8.2	6.15	6.6			1.1	4150	1226	1.95				
460	7.7	5.76	6.9			1.2	3710	1090	2.2				
521	6.8	5.09	7.5			1.4	3240	951	2.5				
588	6.0	4.51	8.0			1.6	2780	831	2.9				
691	5.1	3.83	8.8										
174	20	5.18	3.7			WR61 WR61	6P	0.97	4790	1407	0.90	WR107 WR77 WRF107WR77	4P
199	18	4.53	4.6					1.1	4120	1209	1.05		
209	17	4.30	4.7					1.3	3590	1055	1.20		
239	15	3.77	5.9					1.5	3140	979	1.35		
								1.7	2790	815	1.55		
								1.9	2450	717	1.75		
								2.2	2140	626	2.0		
								0.97	4730	1400	0.90		
227	16	6.07	2.8	WR61 WRF61	4P	1.1	4120	1226	1.05	WR97 WR57 WRF97WR57	4P		
267	13	5.18	5.6			1.2	3690	1104	1.15				
305	12	4.53	7.1			1.5	3170	939	1.35				
321	11	4.30	7.3			1.7	2760	822	1.55				
366	9.7	3.77	9.0										
431	8.2	3.20	12										
478	7.4	2.89	14										
543	6.5	2.54	18										

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.55KW						0.55KW					
2.8	1640	484	1.85	WR97 WR57 WRF97WR57	4P	20	270	69.75	2.2	WR67 WR67	4P
3.2	1480	431	2.0			22	235	61.26	2.5		
3.6	1290	379	2.3			24	220	56.89	2.7		
4.0	1150	336	2.6			11	465	120.63	0.95	WR57 WR57	4P
4.6	1010	296	3.0			13	410	106.58	1.10		
5.5	840	249	3.6	WR87 WR57 WRF87WR57	4P	14	380	98.99	1.20		
2.6	1780	525	0.85			15	345	89.71	1.30		
3.0	1550	456	1.00			17	310	80.55	1.45		
3.4	1340	398	1.15			20	265	69.23	1.70		
3.9	1190	352	1.30			21	250	64.85	1.80		
4.4	1030	305	1.50			24	220	57.29	2.0		
2.9	1650	472	0.95			26	205	53.22	2.2		
3.4	1400	400	1.10			28	186	48.23	2.4		
3.8	1260	361	1.25	WR77 WR37 WRF77WR37	4P	31	167	43.30	2.7		
4.9	970	276	0.85			36	144	37.30	3.1		
5.8	830	236	1.00			39	136	35.07	3.3		
6.2	775	221	1.05			52	102	26.31	4.4		
7.3	650	186	1.25	WR97 WRF97	8P	54	97	24.99	4.7	WR47 WR47	4P
2.7	1980	255.71	1.50			62	85	21.93	5.3		
2.8	1860	241.25	1.60			73	72	18.60	6.3		
3.1	1670	216.28	1.80			15	360	93.68	0.85		
3.1	1690	289.74	1.75		WR97 WRF97	16	330	84.90	0.90		
3.5	1490	255.71	2.0			18	295	76.23	1.00		
3.7	1410	241.25	2.1			20	265	68.54	1.15		
4.2	1260	216.28	2.4			21	250	64.21	1.20		
4.7	1120	289.74	2.7	WR97 WRF97	4P	24	220	56.73	1.35		
5.3	990	255.71	3.0			26	205	52.69	1.45		
5.6	930	241.25	3.2			28	184	47.75	1.65		
6.3	840	216.28	3.6			32	166	42.87	1.80		
3.7	1440	246.54	1.10	WR87 WR87	6P	37	143	36.93	2.1	WR37 WRF37	4P
4.2	1260	216.54	1.25			39	134	34.73	2.2		
4.4	1200	205.71	1.30			46	115	29.88	2.6		
4.9	1060	181.77	1.45			51	103	26.74	2.9		
5.8	910	155.34	1.70			58	90	23.28	3.3		
5.5	950	246.54	1.65	WR87 WR87	4P	62	84	21.81	3.6	WR27 WRF27	4P
6.3	840	216.54	1.85			22	235	61.18	0.85		
6.6	795	205.71	1.95			24	215	55.76	0.95		
7.5	700	181.77	2.2			28	186	48.08	1.10		
8.8	600	155.34	2.6			30	173	44.81	1.15		
9.6	550	142.41	2.8			35	151	39.17	1.30		
11	485	124.97	3.2			37	142	36.72	1.40		
11	455	118.43	3.4	WR77 WR77	4P	42	125	32.40	1.60		
13	400	103.65	3.9			47	111	28.73	1.80		
8.2	645	166.59	1.25			56	94	24.42	2.1		
9.3	565	145.67	1.45			61	86	22.27	2.3		
9.8	535	138.39	1.55			70	75	19.31	2.7		
11	470	121.42	1.75			75	70	18.05	2.9		
13	400	102.99	2.1			87	60	15.60	3.3		
15	360	92.97	2.3	WR67 WR67	4P	103	51	13.25	3.7		
17	315	81.80	2.6			115	46	11.83	4.0		
18	300	77.24	2.8			35	152	39.25	0.85	WR27 WRF27	4P
21	255	65.77	3.2			37	142	36.79	0.90		
8.6	610	158.14	1.00			42	125	32.47	1.05		
9.9	530	137.67	1.15			47	111	28.78	1.15		
11	500	128.97	1.20			56	95	24.47	1.40		
12	440	113.94	1.35			61	86	22.32	1.50		
13	410	105.83	1.45			70	75	19.35	1.75		
14	370	95.91	1.60			75	70	18.08	1.85		
16	335	86.11	1.80			87	60	15.63	2.2		
18	285	74.17	2.1			102	51	13.28	2.5		
						115	46	11.86	2.8		
						134	39	10.13	3.1		
						145	36	9.41	3.4		
						167	32	8.16	3.7		
						178	29	7.63	3.8		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole			
0.55KW						0.55KW								
206	26	6.59	4.2	WR27 WRF27	4P	823	6.4	1.65	11	WR51 WRF51	4P			
243	22	5.60	4.6			921	5.7	1.48	12					
272	19	5.00	4.9			1045	5.0	1.30	13					
318	17	4.27	5.3			0.75KW								
340	15	4.00	5.5			0.30	20700	4650	0.85	WR167 WRF167	WR97 WR97	4P		
404	13	3.37	6.1	0.33	18300	4129	1.00							
						0.52	12000	2657	1.50					
						0.59	10400	2333	1.75					
						0.66	9230	2085	1.95					
50	105	53.76	0.80	WR17 WRF17	2P	0.96	6510	1438	2.8					
57	92	47.44	0.90											
61	86	44.18	1.00											
70	75	38.61	1.15											
69	76	19.71	1.10	WR17 WRF17	4P	0.42	15100	3302	0.85	WR147 WRF147	WR77 WR77	4P		
80	66	16.99	1.30			0.48	13200	2898	1.00					
86	61	15.84	1.40			0.54	11900	2555	1.10					
98	54	13.84	1.60			0.62	10300	2211	1.25					
105	50	12.98	1.70			0.71	9070	1951	1.45					
119	44	11.45	1.85			0.81	7830	1705	1.65					
134	39	10.15	1.95			0.90	7030	1536	1.85					
158	33	8.63	2.2			1.0	6080	1329	2.1					
180	29	7.55	1.90			1.2	5310	1166	2.5					
193	27	7.04	2.0											
221	24	6.15	2.3											
236	22	5.76	2.4											
267	20	5.09	2.6											
302	17	4.51	2.8											
355	15	3.83	3.0											
313	17	8.63	4.3	WR17 WRF17	2P	0.74	8640	1863	0.95	WR137 WRF137	WR77 WR77	4P		
358	15	7.55	3.8			0.87	7330	1586	1.10					
384	14	7.04	4.0			0.99	6500	1391	1.25					
439	12	6.15	4.5			1.1	5850	1256	1.35					
468	11	5.76	4.7			0.67	9640	2073	0.85					
531	9.9	5.09	5.2			0.75	8480	1839	0.95					
599	8.8	4.51	5.4			0.86	7310	1598	1.10					
704	7.5	3.83	6.0			0.99	6480	1397	1.25					
						1.1	5660	1226	1.40					
						1.3	5050	1090	1.60					
						1.5	4410	951	1.80					
						1.7	3810	831	2.1					
						1.9	3320	730	2.4					
174	30	5.18	2.5	WR61 WRF61	6P	1.3	4890	1055	0.9	WR107 WRF107	WR77 WR77	4P		
199	26	4.53	3.1			1.5	4270	919	1.00					
209	25	4.30	3.2			1.7	3800	815	1.15					
239	22	3.77	4.0			1.2	5050	1104	0.85					
						1.5	4330	939	1.00					
						1.7	3770	822	1.15					
						3.7	1690	369	2.5					
						4.3	1470	323	2.9					
263	20	5.18	3.8	WR61 WRF61	4P	2.2	2940	632	1.00	WR97 WRF97	WR57 WR57	4P		
300	18	4.53	4.7			2.5	2570	560	1.15					
316	17	4.30	4.8			2.8	2230	484	1.35					
360	15	3.77	6.0			3.2	2010	431	1.50					
425	12	3.20	8.1			3.6	1760	379	1.70					
471	11	2.89	9.5			4.1	1570	336	1.90					
535	9.8	2.54	12			4.7	1370	296	2.2					
567	9.3	2.40	13			5.5	1150	249	2.6					
666	7.9	2.04	17											
732	7.2	1.86	18											
845	6.2	1.61	18											
207	25	4.35	2.7	WR51 WRF51	6P	3.5	1830	398	0.85	WR87 WRF87	WR57 WR57	4P		
238	22	3.79	3.1			3.9	1630	352	0.95					
254	21	3.55	3.3			4.5	1400	305	1.10					
287	18	3.14	3.5			5.2	1240	268	1.25					
309	17	2.91	3.9			5.8	1090	236	1.40					
						3.8	1710	361	0.90					
						4.6	1410	300	1.10					
						5.4	1200	256	1.30					
312	17	4.35	4.1	WR51 WRF51	4P	2.8	2610	251.15	1.65	WR107 WRF107	8P			
359	15	3.79	4.7			3.0	2390	229.95	1.80					
383	14	3.55	5.0			3.4	2110	203.16	2.0					
434	12	3.14	5.4											
467	11	2.91	6.0											
515	10	2.64	6.8											
574	9.2	2.37	7.5											
666	7.9	2.04	8.7											
708	7.4	1.92	9.3											

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
0.75KW						0.75KW									
3.2	2240	216.28	1.35	WR97 WRF97	8P	39	182	35.07	2.5	WR57 WR57	4P				
3.7	1930	186.30	1.55			46	157	30.18	2.9						
4.1	1760	170.02	1.70			51	140	26.97	3.2						
						52	137	26.31	3.3						
3.5	2030	255.71	1.45	WR97 WRF97	6P	55	130	24.99	3.5						
3.7	1920	241.25	1.55			63	114	21.93	4.0						
4.2	1720	216.28	1.75			74	97	18.60	4.7						
4.8	1500	289.74	2.0	WR97 WRF97	4P	20	355	68.54	0.85	WR47 WR47	4P				
5.4	1330	255.71	2.3			21	335	64.21	0.90						
5.7	1250	241.25	2.4			24	295	56.73	1.00						
6.4	1120	216.28	2.7			26	275	52.69	1.10						
7.4	970	186.30	3.1			29	250	47.75	1.20						
8.1	880	170.02	3.4			32	225	42.87	1.35						
						37	192	36.93	1.55						
4.2	1720	216.54	0.90	WR87 WRF87	6P	40	180	34.73	1.65						
4.4	1640	205.71	0.95			46	155	29.88	1.95						
4.9	1450	181.77	1.05			52	139	26.70	2.2						
5.8	1240	155.34	1.25			58	122	23.59	2.5						
6.3	1130	142.41	1.35			52	139	26.74	2.2						
						59	121	23.28	2.5						
5.6	1280	246.54	1.20	WR87 WRF87	4P	63	113	21.81	2.7						
6.4	1120	216.54	1.40			72	100	19.27	3.0						
6.7	1070	205.71	1.45			77	93	17.89	3.1						
7.6	940	181.77	1.65			85	84	16.22	3.3						
8.9	810	155.34	1.90												
9.7	740	142.41	2.1			29	250	48.08	0.80						
11	650	124.97	2.4			31	235	44.81	0.85						
12	615	118.43	2.5			35	205	39.17	1.00						
13	540	103.65	2.9			38	191	36.72	1.05						
15	485	93.38	3.2			43	168	32.40	1.20						
				48	149	28.73	1.35								
8.3	860	166.59	0.95	WR77 WRF77	4P	57	127	24.42	1.60	WR37 WR37	4P				
9.5	755	145.67	1.10			62	116	22.27	1.75						
10	720	138.39	1.15			71	100	19.31	2.0						
11	630	121.42	1.30			76	94	18.05	2.1						
13	535	102.99	1.55			88	81	15.60	2.5						
15	485	92.97	1.70			104	69	13.25	2.8						
17	425	81.80	1.95			117	61	11.83	3.0						
18	400	77.24	2.0			137	53	10.11	3.2						
21	340	65.77	2.4			146	49	9.47	3.4						
24	300	57.68	2.7												
27	270	52.07	3.0												
30	240	45.81	3.5												
32	225	43.26	3.7												
								48	149			28.78	0.85		
11	670	128.97	0.90			WR67 WRF67	4P	56	127			24.47	1.00	WR27 WR27	4P
12	590	113.94	1.00	62	116			22.32	1.10						
13	550	105.83	1.10	71	100			19.35	1.30						
14	500	95.91	1.20	76	94			18.08	1.40						
16	445	86.11	1.35	88	81			15.63	1.60						
19	385	74.17	1.55	104	69			13.28	1.90						
20	360	69.75	1.65	116	62			11.86	2.1						
23	320	61.26	1.90	136	53			10.13	2.3						
24	295	56.89	2.0	147	49			9.41	2.5						
27	270	51.56	2.2	169	42			8.16	2.7						
30	240	46.29	2.5	181	40			7.63	2.8						
				209	34			6.59	3.1						
				246	29			5.60	3.4						
				276	26	5.00	3.7								
13	555	106.58	0.80	WR57 WRF57	4P	70	102	19.71	0.85	WR17 WRF17	4P				
14	515	98.99	0.90			81	88	16.99	0.95						
15	465	89.71	0.95			87	82	15.84	1.05						
17	420	80.55	1.10			100	72	13.84	1.20						
20	360	69.23	1.25			106	67	12.98	1.25						
21	335	64.85	1.35			121	59	11.45	1.35						
24	295	57.29	1.50			136	53	10.15	1.45						
26	275	53.22	1.65			160	45	8.63	1.60						
29	250	48.23	1.80			183	39	7.55	1.45						
32	225	43.30	2.0			196	37	7.04	1.50						
37	194	37.30	2.3			224	32	6.15	1.70						

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.75KW						1.1KW							
239	30	5.76	1.75	WR17 WRF17	4P	1.4	6870	1029	1.90	WR147 R77 WRF147R77	4P		
271	26	5.09	1.95			1.6	5950	889	2.2				
306	23	4.51	2.0			1.8	5240	784	2.5				
360	20	3.83	2.3			2.0	4630	695	2.8				
236	30	11.45	2.7	WR17 WRF17	2P	1.0	9480	1391	0.85	WR137 R77 WRF137R77	4P		
266	27	10.15	2.9			1.1	8550	1256	0.95				
313	23	8.63	3.1			1.3	7500	1105	1.05				
358	20	7.55	2.8			1.3	7080	1043	1.15				
384	19	7.04	2.9			1.6	6010	888	1.35				
439	16	6.15	3.3			1.0	9470	1397	0.85				
468	15	5.76	3.5			1.1	8290	1226	0.95				
531	14	5.09	3.8			1.3	7390	1090	1.10				
599	12	4.51	4.0			1.5	6450	951	1.25				
704	10	3.83	4.4			1.7	5590	831	1.45				
199	36	4.53	2.3	WR61 WRF61	6P	1.9	4890	730	1.65	WR107 R77 WRF107R77	4P		
209	34	4.30	2.3			2.2	4190	629	1.90				
239	30	3.77	2.9			2.5	3770	560	2.1				
281	26	3.20	3.9			2.8	3270	490	2.5				
267	27	5.18	2.8	WR61 WRF61	4P	2.0	4870	717	0.90	WR97 WR57 WRF97WR57	4P		
305	24	4.53	3.5			2.3	4100	614	1.05				
321	22	4.30	3.6			2.6	3630	544	1.20				
366	20	3.77	4.4			2.8	3280	492	1.30				
431	17	3.20	6.0			3.3	2780	417	1.55				
478	15	2.89	7.1			3.8	2480	369	1.75				
543	13	2.54	8.9			4.3	2170	323	2.0				
575	13	2.40	9.8			4.9	1910	285	2.2				
675	11	2.04	13			5.5	1690	253	2.5				
743	9.6	1.86	13			3.2	2930	431	1.00			WR97 WR57 WRF97WR57	4P
858	8.3	1.61	14			3.7	2580	379	1.15				
238	30	3.79	2.3	WR51 WRF51	6P	4.2	2290	336	1.30				
254	28	3.55	2.4			4.7	2010	296	1.50				
287	25	3.14	2.6			5.6	1680	249	1.80				
309	23	2.91	2.9			6.0	1570	234	1.90				
341	21	2.64	3.3			6.7	1400	209	2.1				
317	23	4.35	3.0	WR51 WRF51	4P	5.2	1810	268	0.85	WR87 WR57 WRF87WR57	4P		
364	20	3.79	3.5			5.9	1600	236	0.95				
389	18	3.55	3.8			6.7	1400	209	1.10				
440	16	3.14	4.0			5.5	1760	256	0.90				
474	15	2.91	4.4			6.0	1590	232	0.95				
523	14	2064	5.0			7.2	1350	195	1.15				
582	12	2.37	5.6			2.7	3880	251.15	1.10	WR107 WRF107	8P		
676	11	2.04	6.5			3.0	3550	229.95	1.20				
719	10	1.92	6.9			3.3	3140	203.16	1.35				
835	8.6	1.65	8.0			4.0	2660	172.34	1.60				
935	7.7	1.48	8.8	WR167 R97 WRF167R97	4P	3.6	2920	255.71	1.05	WR97 WRF97	6P		
1060	6.8	1.30	9.3			3.8	2750	241.25	1.10				
1.1KW						4.2	2470	216.28	1.20				
0.53	17700	2657	1.00			4.9	2130	186.30	1.40				
0.60	15400	2333	1.15			5.5	1920	255.71	1.55	WR97 WRF97	4P		
0.67	13700	2082	1.30			5.8	1810	241.25	1.65				
0.75	12300	1877	1.45			6.5	1620	216.28	1.85				
0.84	10900	1670	1.65			7.5	1400	186.30	2.2				
0.97	9600	1438	1.90			8.2	1280	170.02	2.3				
1.1	8540	1279	2.1			9.3	1130	150.78	2.7				
1.2	7420	1123	2.4			11	950	126.75	3.2				
0.63	15000	2211	0.85	WR147 R77 WRF147R77	4P	12	870	116.48	3.4				
0.72	13300	1951	1.00										
0.82	11500	1705	1.15										
0.91	10300	1536	1.25										
1.0	8940	1329	1.45										
1.2	7810	1166	1.65										

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
1.1KW						1.1KW									
6.5	1620	216.54	0.95	WR87 WRF87	4P	52	200	26.70	1.50	WR47 WRF47	4P				
6.8	1540	205.71	1.00			59	177	23.59	1.70						
7.7	1360	181.77	1.15			60	175	23.28	1.70						
9.0	1170	155.34	1.35			64	164	21.81	1.85						
9.8	1070	142.41	1.45			73	145	19.27	2.0						
11	940	124.97	1.65			78	134	17.89	2.2						
12	890	118.43	1.75			86	122	16.22	2.3						
14	450	103.65	2.0			96	109	14.56	2.4						
15	700	93.38	2.2			112	94	12.54	2.7						
17	615	81.92	2.5			119	89	11.79	2.8						
19	545	72.57	2.8			138	76	10.15	3.0						
22	480	63.68	3.2			154	68	9.07	3.2						
23	455	60.35	3.4												
27	395	52.82	3.9												
						43	245	32.40	0.80	WR37 WRF37	4P				
12	910	121.42	0.90	49	215	28.73	0.95								
14	775	102.99	1.05	57	183	24.42	1.10								
15	700	92.97	1.20	73	145	19.31	1.40								
17	615	81.80	1.35	78	135	18.05	1.50								
18	580	77.24	1.40	90	117	15.60	1.70								
21	495	65.77	1.65	106	99	13.25	1.90								
24	435	57.68	1.90	118	89	11.83	2.1								
27	390	52.07	2.1	139	76	10.11	2.2								
31	345	45.81	2.4	148	71	9.47	2.3								
32	325	43.26	2.5	176	60	7.97	2.6								
38	275	36.83	3.0	210	50	6.67	2.9								
42	250	33.47	3.3	247	43	5.67	3.3								
						277	38	5.06	3.5						
						72	145	19.35	0.90	WR27 WRF27	4P				
16	645	86.11	0.95	77	136	18.08	0.95								
19	555	74.17	1.10	90	117	15.63	1.10								
20	525	69.75	1.15	105	100	13.28	1.30								
23	460	61.26	1.30	118	89	11.86	1.45								
25	425	56.89	1.40	138	76	10.13	1.61								
27	385	51.89	1.55	172	61	8.16	1.90								
30	345	46.29	1.75	184	57	7.63	1.95								
35	300	39.88	1.95	212	50	6.59	2.1								
37	280	37.50	2.0	250	42	5.60	2.4								
43	240	32.27	2.2	280	38	5.00	2.5								
49	215	28.83	2.4	328	32	4.27	2.7								
50	210	28.13	2.6	350	30	4.00	2.8								
52	200	26.72	2.7	415	25	3.37	3.1								
60	176	23.44	3.2												
70	149	19.89	4.0												
						203	52	13.28	2.5	WR27 WRF27	2P				
20	520	69.23	0.85	228	46	11.86	2.8								
22	485	64.85	0.90	267	39	10.13	3.1								
24	430	57.29	1.05	287	37	9.41	3.3								
26	400	53.22	1.15	331	32	8.16	3.7								
29	360	48.23	1.25	354	30	7.63	3.8								
32	325	43.30	1.40	410	26	6.59	4.1								
38	280	37.30	1.60	482	22	5.60	4.5								
40	265	35.07	1.70	540	20	5.00	4.9								
46	225	30.18	2.0	632	17	4.27	5.2								
52	200	26.97	2.2	675	16	4.00	5.4								
53	197	26.31	2.3	801	13	3.37	6.0								
56	188	24.99	2.4												
64	165	21.93	2.7												
75	140	18.60	3.2												
83	126	16.79	3.6												
						137	77	19.71	1.10	WR17 WRF17	2P				
29	360	47.75	0.85	159	66	16.99	1.30								
33	320	42.87	0.95	170	62	15.84	1.40								
38	275	36.93	1.10	195	54	13.84	1.60								
40	260	34.73	1.15	208	51	12.98	1.70								
47	225	29.88	1.35	236	45	11.45	1.80								
						266	40	10.15	1.95						
						313	34	8.63	2.1						

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
1.1KW						1.5KW									
358	29	7.55	1.90	WR17 WRF17	2P	1.4	9650	1043	0.85	WR137 WRF137	WR77 WR77	4P			
384	27	7.04	2.0			1.6	8200	888	1.00						
439	24	6.15	2.3			2.0	6440	699	1.25						
468	22	5.76	2.4			2.3	5590	609	1.45						
531	20	5.09	2.6			1.3	10100	1090	0.80						
599	18	4.51	2.7			1.5	8790	951	0.90						
704	15	3.83	3.0			1.7	7640	831	1.05						
						1.9	6680	730	1.20						
249	42	5.63	2.6	WR71 WRF71	4P	2.2	5740	629	1.40						
262	40	5.35	2.6			2.5	5150	560	1.55						
296	36	4.73	3.5			2.9	4470	490	1.80						
						3.3	3910	428	2.0						
203	52	4.53	1.60	WR61 WRF61	6P	3.7	3510	381	2.3						
214	49	4.30	1.65			4.4	2980	323	2.7						
244	43	3.77	2.0												
309	34	4.53	2.4	WR61 WRF61	4P	2.7	4860	528	0.90	WR107 WRF107	WR77 WR77	4P			
326	32	4.30	2.5			2.6	4970	544	0.85						
371	28	3.77	3.1			2.9	4490	492	0.95						
438	24	3.20	4.2			3.4	3810	417	1.15						
485	22	2.89	4.9			3.8	3390	369	1.25						
551	19	2.54	6.2			4.4	2960	323	1.45						
583	18	2.40	6.8			3.0	4410	469	1.00						
685	15	2.04	8.8												
754	14	1.86	9.1			4.2	3120	336	0.95	WR97 WRF97	WR57 WR57	4P			
870	12	1.61	9.4			4.8	2740	296	1.10						
1000	11	1.40	9.9			5.7	2300	249	1.30						
						6.0	2150	234	1.40						
243	43	3.79	1.60	WR51 WRF51	6P	6.8	1920	209	1.55						
259	41	3.55	1.70			3.0	4710	229.95	0.90	WR107 WRF107	8P				
293	36	3.14	1.80			3.5	4160	203.15	1.05						
316	33	2.91	2.0			4.1	3530	172.34	1.20						
348	30	2.64	2.3			4.4	3250	158.68	1.30						
369	28	3.79	2.4	WR51 WRF51	4P	3.7	3910	251.15	1.10	WR107 WRF107	6P				
394	27	3.55	2.6			4.0	3580	229.95	1.20						
446	24	3.14	2.8			4.5	3160	203.16	1.35						
481	22	2.91	3.1			5.3	2680	172.34	1.60						
530	20	2.64	3.5			5.8	2470	158.68	1.75						
591	18	2.37	3.9			6.5	2210	141.83	1.95						
686	15	2.04	4.5												
729	14	1.92	4.8			5.5	2600	255.71	1.15	WR97 WRF97	4P				
847	12	1.65	5.6			5.8	2450	241.25	1.20						
948	11	1.48	6.1			6.5	2200	216.28	1.35						
1075	9.8	1.30	6.4			7.6	1890	186.30	1.60						
						8.3	1730	170.02	1.75						
				9.4	1530	150.78	1.95								
				11	1290	126.75	2.3								
				12	1180	116.48	2.5								
				14	1050	403.44	2.8								
				15	940	92.48	3.2								

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
1.5KW						1.5KW							
15	940	92.97	0.85	WR77 WRF77	4P	73	196	19.31	1.00	WR37 WRF37	4P		
17	830	81.80	1.00			78	183	18.05	1.10				
18	785	77.24	1.05			90	159	15.60	1.25				
21	670	65.77	1.25			106	135	13.25	1.40				
24	585	57.68	1.40			119	120	11.83	1.50				
27	530	52.07	1.55			140	103	10.11	1.65				
31	465	45.81	1.75			149	96	9.47	1.75				
33	440	43.26	1.85			177	81	7.97	1.95				
38	375	36.83	2.2			211	68	6.67	2.1				
42	340	33.47	2.4			249	58	5.67	2.5				
49	295	29.00	2.8			279	51	5.06	2.6				
56	255	25.23	3.0			326	44	4.32	2.9				
60	240	23.37	3.5			348	41	4.05	3.0				
66	220	21.43	3.8			414	35	3.41	3.2				
75	191	18.80	4.1										
23	620	61.26	0.95	WR67 WRF67	4P	204	70	13.25	2.7	WR37 WRF37	2P		
25	580	56.89	1.05			228	63	11.83	2.9				
27	525	51.56	1.15			267	54	10.11	3.2				
30	470	46.29	1.30			285	50	9.47	3.3				
35	405	39.88	1.45			339	42	7.97	3.7				
38	380	37.50	1.50			90	159	15.63	0.80	WR27 WRF27	4P		
44	330	32.37	1.65			106	135	13.28	0.95				
49	295	28.83	1.80			119	121	11.86	1.05				
50	285	28.13	1.90			139	103	10.13	1.20				
53	270	26.72	2.0			173	83	8.16	1.40				
60	240	23.44	2.3			185	78	7.63	1.45				
71	200	19.89	3.0			214	67	6.59	1.60				
79	182	17.95	3.2			252	57	5.60	1.75				
						282	51	5.00	1.85				
						330	43	4.27	2.0				
27	540	53.22	0.85	WR57 WRF57	4P	353	41	4.00	2.1	WR27 WRF27	2P		
29	490	48.23	0.90			418	34	3.37	2.3				
33	440	43.30	1.00										
38	380	37.30	1.20			228	63	11.86	2.0				
40	355	35.07	1.25			267	54	10.13	2.3				
47	305	30.18	1.45			331	43	8.16	2.7				
52	275	26.97	1.65			354	41	7.63	2.8				
54	265	26.31	1.70			410	35	6.59	3.0				
56	255	24.99	1.75			482	30	5.60	3.3				
64	225	21.93	2.0			540	27	5.00	3.6				
76	189	18.60	2.4			632	23	4.27	3.8				
84	171	16.79	2.6			675	21	4.00	4.0				
95	150	14.77	2.9			801	18	3.37	4.4				
101	142	13.95	3.0										
119	121	11.88	3.4										
38	375	36.93	0.80	WR47 WRF47	4P	250	57	5.63	1.90	WR71 WRF71	4P		
41	355	34.73	0.85			264	54	5.35	1.90				
47	305	29.88	1.00			298	48	4.73	2.6				
53	270	26.77	1.10			349	41	4.04	3.5				
60	240	23.59	1.25			381	38	3.70	4.1				
61	235	23.28	1.25			434	33	3.25	5.5				
65	220	21.81	1.35			458	31	3.08	6.2				
73	196	19.27	1.50			523	27	2.70	7.8				
79	182	17.89	1.60			581	25	2.43	8.7				
87	165	16.22	1.65										
97	148	14.56	1.80			312	46	4.53	1.80	WR61 WRF61	4P		
112	127	12.54	1.95			328	44	4.30	1.85				
120	120	11.79	2.0			374	38	3.77	2.3				
139	103	10.15	2.2			441	33	3.20	3.1				
155	92	9.07	2.4			488	29	2.89	3.6				
176	81	8.01	2.5			555	26	2.54	4.6				
182	79	7.76	2.1			588	24	2.40	5.0				
203	71	6.96	2.2			690	21	2.04	6.4				
235	61	6.00	2.6			759	19	1.86	6.7				
250	57	5.64	2.7			876	16	1.61	7.0				
291	49	4.85	3.0			1005	14	1.40	7.3				
325	44	4.34	3.3										
368	39	3.83	3.7										

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
1.5KW						2.2KW							
372	39	3.79	1.80	WR51 WRF51	4P	4.6	4540	203.16	0.95	WR107 WRF107	6P		
397	36	3.55	1.90			5.4	3850	172.34	1.10				
450	32	3.14	2.0			5.9	3550	158.68	1.20				
484	30	2.91	2.3			6.6	3170	141.83	0.35				
534	27	2.64	2.6										
595	24	2.37	2.9			5.6	3740	251.15	1.15	WR107 WRF107	4P		
691	21	2.04	3.3			6.1	3430	229.95	1.25				
734	20	1.92	3.5			6.9	3030	203.16	1.40				
853	17	1.65	4.1			8.2	2570	172.34	1.65				
955	15	1.48	4.5			8.9	2360	158.68	1.80				
1080	13	1.30	4.7	9.9	2110	141.83	2.0						
				11	1900	127.68	2.3						
				12	1720	115.63	2.5						
2.2KW						14	1530	102.53	2.8				
0.84	22400	1670	0.80	WR167 WR97 WRF167WR97	4P	15	1380	92.70	3.1				
0.98	19500	1438	0.95			6.5	3220	216.28	0.95	WR97 WRF97	4P		
1.1	17300	1279	1.05			7.6	2780	186.30	1.10				
1.3	15100	1123	1.20			8.3	2530	170.02	1.20				
1.4	13500	999	1.35			9.4	2250	150.78	1.35				
1.6	11600	861	1.55			11	1890	126.75	1.60				
1.9	10300	760	1.75			12	1740	116.48	1.75				
2.2	8710	656	2.1			14	1540	103.44	1.95				
				15	1380	92.48	2.2						
2.6	7130	533	1.80	17	1240	83.15	2.4						
3.0	6150	462	2.1	20	1080	72.17	2.8						
3.3	5740	426	2.3	22	970	65.21	3.1						
3.8	4960	368	2.6	24	890	59.92	3.4						
4.3	4390	326	3.0	27	795	53.21	3.8						
				30	710	47.58	4.2						
1.2	15800	1166	0.80	WR147 WR77 WRF147WR77	4P	11	1860	124.97	0.85	WR87 WRF87	4P		
1.4	13900	1029	0.95			12	1760	118.43	0.90				
1.6	12000	889	1.10			14	1540	103.65	1.00				
1.8	10600	784	1.20			15	1390	93.38	1.10				
2.0	9400	695	1.40			17	1220	81.92	1.25				
2.3	8420	619	1.55			19	1080	72.57	1.45				
2.5	7580	558	1.70			22	950	63.68	1.65				
2.9	6640	489	1.95			23	900	60.35	1.70				
2.0	9510	699	0.85	27	785	52.82	1.95						
2.3	8270	609	0.95	30	710	47.58	2.2						
1.9	9890	730	0.80	34	620	41.74	2.5						
2.2	8500	629	0.95	38	550	36.84	2.8						
2.5	7620	560	1.05	43	485	32.66	3.2						
2.9	6630	490	1.20	41	515	34.40	2.9						
3.3	5790	428	1.40	45	470	31.40	3.3						
3.7	5190	381	1.55	51	415	27.84	3.7						
4.4	4400	323	1.80	60	350	23.40	4.4						
4.8	3960	291	2.0	66	320	21.51	4.7						
5.5	3460	255	2.3										
6.3	3030	223	2.6										
3.8	5010	369	0.85	WR107 W R77 WRF107WR77	4P	21	980	65.77	0.85	WR77 WRF77	4P		
4.4	4390	323	1.00			24	860	57.68	0.95				
4.9	3860	285	1.10			27	775	52.07	1.05				
5.6	3420	253	1.25			31	685	45.81	1.20				
6.6	2900	214	1.50			33	645	43.26	1.25				
4.3	4480	325	0.95			38	550	36.83	1.50				
						42	500	33.47	1.65				
						49	430	29.00	1.90				
6.0	3170	234	0.95	56	375	25.23	2.1						
6.8	2840	209	1.05	60	350	23.37	2.3						
3.1	6680	222.60	1.20	WR97 WR57 WRF97WR57	4P	66	320	21.43	2.6				
3.7	5660	188.45	1.40			75	280	18.80	2.8				
4.0	5230	174.40	1.55			79	265	17.82	2.9				
4.5	4690	156.31	1.70			90	230	15.60	3.2				
5.0	4240	141.12	1.90			100	210	14.05	3.4				
5.5	3850	128.18	2.1										
6.2	3410	113.72	2.3			35	595	39.88	1.00	WR67 WRF67	4P		
6.8	3100	103.20	2.6			38	560	37.50	1.00				
				44	480	32.27	1.10						

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
2.2KW						2.2KW					
49	430	28.83	1.20	WR67 WRF67	4P	140	151	10.11	1.15	WR37 WRF37	4P
60	350	23.44	1.60			149	141	9.47	1.20		
71	295	19.89	2.0			177	119	7.97	1.30		
79	270	17.95	2.2			211	99	6.67	1.45		
89	235	15.79	2.4			249	84	5.67	1.70		
95	220	14.91	2.5			279	75	5.06	1.80		
111	189	12.70	2.8			326	64	4.32	1.95		
122	172	11.54	2.9			348	60	4.05	2.0		
141	149	10.00	3.2			414	51	3.41	2.2		
162	130	8.70	3.4								
181	116	7.79	3.3								
38	555	37.30	0.80	WR57 WRF57	4P	141	149	19.31	1.35	WR37 WRF37	2P
40	525	35.07	0.85			151	139	18.05	1.45		
47	450	30.18	1.00			175	120	15.60	1.65		
52	400	26.97	1.10			206	102	13.25	1.85		
64	325	21.93	1.40			231	91	11.83	2.0		
76	275	18.60	1.60			270	78	10.11	2.2		
84	250	16.79	1.80			288	73	9.47	2.3		
95	220	14.77	2.0			342	61	7.97	2.5		
101	210	13.95	2.1			409	51	6.67	2.8		
119	177	11.88	2.3			482	44	5.67	3.3		
131	161	10.79	2.4			540	39	5.06	3.5		
151	139	9.35	2.7			632	33	4.32	3.8		
156	135	9.06	2.8	675	31	4.05	3.9				
177	119	7.97	3.0	801	26	3.41	4.3				
104	205	26.31	2.2	WR57 WRF57	2P	139	151	10.13	0.80	WR27 WRF27	4P
109	192	24.99	2.3			214	98	6.59	1.10		
124	169	21.93	2.7			252	83	5.60	1.20		
147	143	18.60	3.1			282	75	5.00	1.30		
163	129	16.79	3.5			330	64	4.27	1.35		
185	114	14.77	3.8			353	60	4.00	1.45		
196	107	13.95	4.0			418	50	3.37	1.55		
73	285	19.27	1.05	WR47 WRF47	4P	206	102	13.28	1.25	WR27 WRF27	2P
87	240	16.22	1.15			230	91	11.86	1.40		
97	215	14.56	1.20			270	78	10.13	1.55		
112	187	12.54	1.35			335	63	8.16	1.85		
120	176	11.79	1.40			358	59	7.63	1.90		
139	151	10.15	1.50			414	51	6.59	2.1		
155	135	9.07	1.65			488	43	5.60	2.3		
176	119	8.01	1.70			546	39	5.00	2.5		
182	116	7.76	1.40			639	33	4.27	2.6		
203	104	6.96	1.55			683	31	4.00	2.8		
235	89	6.00	1.75			810	26	3.37	3.0		
250	84	5.64	1.85								
291	72	4.85	2.1	298	70	4.73	1.75	WR71 WRF71	4P		
325	65	4.34	2.3	349	60	4.04	2.4				
368	57	3.83	2.5	381	55	3.70	2.8				
117	179	23.28	1.70	434	48	3.25	3.8				
125	168	21.81	1.80	458	46	3.08	4.2				
142	148	19.27	2.0	523	40	2.70	5.3				
153	138	17.89	2.1	581	36	2.43	5.9				
168	125	16.22	2.2	662	32	2.13	6.3				
187	112	14.56	2.4	750	28	1.88	6.7				
218	97	12.54	2.6	846	25	1.67	7.0				
231	91	11.79	2.7	991	21	1.42	7.3				
269	78	10.15	2.9	374	56	3.77	1.55			WR61 WRF61	4P
301	70	9.07	3.2	441	48	3.20	2.1				
341	62	8.01	3.3	488	43	2.89	2.5				
90	230	15.60	0.85	555	38	2.54	3.1				
106	198	13.25	0.95	588	36	2.40	3.4				
119	176	11.83	1.05	690	30	2.04	4.4				
				759	28	1.86	4.6				
				876	24	1.61	4.8				
				1005	21	1.40	5.0				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
2.2KW						3.0KW					
450	47	3.14	1.40	WR51 WRF51	4P	6.1	4710	229.95	0.90	WR107 WRF107	4P
534	39	2.64	1.75			6.9	4160	203.16	1.05		
595	35	2.37	1.95			8.1	3530	172.34	1.20		
691	30	2.04	2.3			8.8	3250	158.68	1.30		
734	29	1.92	2.4			9.9	2900	141.83	1.50		
853	25	1.65	2.8			11	2610	127.68	1.65		
955	22	1.48	3.1			12	2370	115.63	1.80		
1080	19	1.30	3.2			14	2100	102.53	2.0		
3.0KW						15	1900	92.70	2.3		
1.2	20900	1123	0.85	WR167 WR97 WRF167WR97	4P	18	1610	78.57	2.7		
1.4	18600	999	0.95			19	1490	72.88	2.9		
1.6	16000	861	1.10			9.3	3090	150.78	0.95	WR97 WRF97	4P
1.8	14200	760	1.25			11	2590	126.75	1.15		
2.1	12100	656	1.50			12	2380	116.48	1.25		
2.8	9280	503	1.95			14	2120	103.44	1.40		
2.6	9880	533	1.30	WR147 WR87 WRF147WR87	4P	15	1890	92.48	1.60		
3.0	8540	462	1.50			17	1700	83.15	1.75		
3.3	7940	426	1.65			19	1480	72.17	2.0		
3.8	6860	368	1.90			21	1330	65.21	2.2		
4.3	6070	326	2.1			23	1230	59.92	2.5		
5.0	5180	280	2.5			26	1090	53.21	2.8		
1.6	16600	889	0.80	WR147 WR77 WRF147WR77	4P	29	970	47.58	3.1		
1.8	14700	784	0.90			33	880	42.78	3.4		
2.0	13000	695	1.00			38	760	37.13	4.0		
2.3	11600	619	1.10			42	680	33.25	4.2		
2.5	10500	558	1.25			15	1910	93.38	0.80	WR87 WRF87	4P
2.8	9160	490	0.85	WR137 WR77 WRF137WR77	4P	17	1680	81.92	0.90		
3.3	7990	428	1.00			19	1490	72.57	1.05		
3.7	7150	381	1.10			22	1300	63.68	1.20		
4.3	6070	323	1.30			23	1230	60.35	1.25		
4.8	5460	291	1.45			27	1080	52.82	1.45		
5.5	4770	255	1.70			29	970	47.58	1.60		
6.3	4180	223	1.90			34	850	41.74	1.80		
2.7	9870	517	0.80			38	755	36.84	2.1		
3.1	8650	453	0.95			43	670	32.66	2.3		
5.5	4730	253	0.90	WR107 WR77 WRF107WR77	4P	50	570	27.88	2.6		
6.5	4010	214	1.05			50	570	27.84	2.7		
7.5	3500	187	1.25			60	480	23.40	3.2		
5.5	4870	256	0.90			65	440	21.51	3.4		
3.2	8860	222.60	0.90	WR137 WRF137	8P	73	390	19.10	3.7		
3.8	7500	188.45	1.05			82	350	17.08	4.0		
4.1	6940	174.40	1.15			91	315	15.35	4.3		
4.6	6220	156.31	1.30			31	940	45.81	0.85	WR77 WRF77	4P
5.1	5620	141.12	1.40			32	890	43.26	0.95		
5.6	5100	128.18	1.55			38	755	36.83	1.10		
6.3	4520	113.72	1.75			42	685	33.47	1.20		
7.0	4110	103.20	1.95			48	595	29.00	1.40		
8.1	3530	88.70	2.3			55	515	25.23	1.50		
4.2	6780	222.60	1.20	WR137 WRF137	6P	60	480	23.37	1.70		
5.0	5740	188.45	1.40			65	440	21.43	1.85		
5.4	5320	174.40	1.50			74	385	18.80	2.0		
6.0	4760	156.31	1.70			79	365	17.82	2.1		
6.7	4300	141.12	1.85			90	320	15.60	2.3		
7.3	3910	128.18	2.0			100	290	14.05	2.5		
8.3	3470	113.72	2.3			114	250	12.33	2.7		
9.1	3150	103.20	2.5			129	225	10.88	3.0		
5.9	4840	158.68	0.90	WR107 WRF107	6P	145	197	9.64	3.2		
6.6	4320	141.83	1.00			163	176	8.59	3.6		
7.4	3890	127.68	1.10			181	158	7.74	3.8		
						206	139	6.79	4.2		

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
3.0KW						3.0KW							
60	480	23.44	1.15	WR67 WRF67	4P	346	83	4.05	1.45	WR37 WRF37	4P		
70	405	19.89	1.45			411	70	3.41	1.60				
78	365	17.95	1.60			WR37 WRF37	2P	277	103	10.11	1.65		
89	325	15.79	1.75					296	97	9.47	1.70		
94	305	14.91	1.80					351	82	7.97	1.90		
110	260	12.70	2.0					420	68	6.67	2.1		
121	235	11.54	2.1					494	58	5.67	2.5		
140	205	10.00	2.3					553	52	5.06	2.6		
52	550	26.97	0.80	WR57 WRF57	4P			648	44	4.32	2.8	WR27 WRF27	4P
64	450	21.93	1.00					692	41	4.05	3.0		
75	380	18.60	1.20			821	35	3.41	3.2				
83	345	16.79	1.30			250	115	5.60	0.85				
95	300	14.77	1.45			280	102	5.00	0.95	WR27 WRF27	4P		
100	285	13.95	1.50			328	87	4.27	1.00				
118	245	11.88	1.65			350	82	4.00	1.05				
130	220	10.79	1.75			415	69	3.37	1.15				
150	191	9.35	1.95			WR27 WRF27	2P	425	67	6.59	1.55		
155	185	9.06	2.0					500	57	5.60	1.75		
176	163	7.97	2.2					560	51	5.00	1.85		
186	154	7.53	2.3					656	44	4.27	2.0		
218	131	6.41	2.6					700	41	4.00	2.1		
240	119	5.82	2.7					831	35	3.37	2.3		
277	103	5.05	3.0					217	132	6.45	1.45	WR81 WRF81	4P
319	90	4.39	3.1					252	114	5.56	2.0		
128	225	21.93	2.0	276	104	5.07	2.4	WR71 WRF71	4P				
151	190	18.60	2.4	311	92	4.50	3.2						
167	172	16.79	2.6	370	77	3.78	3.9						
190	151	14.77	2.9	296	97	4.73	1.25						
201	143	13.95	3.0	WR47 WRF47	4P	347	83	4.04	1.75	WR61 WRF61	4P		
236	122	11.88	3.3			378	76	3.70	2.0				
259	110	10.79	3.5			431	67	3.25	2.7				
86	330	16.22	0.85			455	63	3.08	3.1				
96	300	14.56	0.90			WR51 WRF51	4P	371	77	3.77	1.15		
112	255	12.54	0.95					438	66	3.20	1.55		
119	240	11.79	1.00					485	59	2.89	1.80		
138	210	10.15	1.10					551	52	2.54	2.3		
154	186	9.07	1.20					583	49	2.40	2.5		
175	164	8.01	1.25					685	42	2.04	3.2		
181	159	7.76	1.05					754	38	1.86	3.3		
201	143	6.96	1.10					870	33	1.61	3.5		
233	123	6.00	1.25					1000	29	1.40	3.6		
248	115	5.64	1.35					WR167 WR97 WRF167WR97	4P	446	64	3.14	1.00
288	99	4.85	1.50			530	54			2.64	1.30		
323	89	4.34	1.65			591	49			2.37	1.40		
365	78	3.83	1.85	686	42	2.04	1.65						
237	121	11.79	2.0	729	39	1.92	1.75						
276	104	10.15	2.2	847	34	1.65	2.0						
309	93	9.07	2.4	948	30	1.48	2.2						
349	82	8.01	2.5	1075	27	1.30	2.4						
361	79	7.76	2.1	4.0KW									
402	71	6.96	2.2	WR147 WR87 WRF147WR87	4P	1.6	21200	861	0.85				
467	61	6.00	2.5			1.9	18700	760	0.95				
496	58	5.64	2.7			2.2	16000	656	1.10				
577	50	4.85	3.0			2.8	12300	503	1.45				
646	44	4.34	3.3			3.8	9190	376	1.95				
731	39	3.83	3.7			4.2	8180	335	2.2				
139	205	10.11	0.80			WR37 WRF37	4P	2.7	13100	533	1.00		
148	194	9.47	0.85					3.1	11300	462	1.15		
176	163	7.97	0.95	3.3	10500			426	1.25				
210	137	6.67	1.05	3.8	9060			368	1.45				
247	116	5.67	1.25										
277	104	5.06	1.30										
324	88	4.32	1.45										

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
4.0KW						4.0KW					
4.4	8010	326	1.60	WR147 WR87 WRF147WR87	4P	33	1150	42.78	2.6	WR97 WRF97	4P
5.1	6850	280	1.90			38	1000	37.13	3.0		
5.7	6050	247	2.2			43	890	33.25	3.2		
6.7	5220	214	2.5			44	860	32.05	3.0		
7.5	4620	189	2.8			52	730	27.19	3.5		
8.9	3880	159	3.3			57	675	25.03	4.2		
						63	600	22.37	4.5		
						71	540	20.14	4.8		
2.3	15300	619	0.85	WR147 WR77 WRF147WR77	4P	22	1710	63.68	0.90	WR87 WRF87	4P
2.5	13800	558	0.95			24	1620	60.35	0.95		
2.9	12100	489	1.10			27	1420	52.82	1.10		
3.4	10200	415	1.25			30	1280	47.58	1.20		
3.7	9430	381	0.85	WR137 WR77 WRF137WR77	4P	34	1120	41.74	1.40		
4.4	8000	323	1.00			39	990	36.84	1.55		
4.9	7200	291	1.10			43	880	32.66	1.75		
5.6	6290	255	1.25			51	750	27.88	2.0		
6.3	5520	223	1.45			41	930	34.40	1.6		
3.8	9440	376	0.85			45	840	31.40	1.85		
4.2	8500	339	0.95	WR107 WR77 WRF107WR77	4P	51	750	27.84	2.1		
4.8	7450	297	1.05			61	630	23.40	2.5		
7.6	4620	187	0.95			66	580	21.51	2.6		
7.3	4840	193	0.90			74	515	19.10	2.8		
8.2	4330	172	1.00	WR147 WRF147	8P	83	460	17.08	3.0		
4.4	8660	163.57	1.50			92	415	15.35	3.2		
4.9	7790	147.14	1.65			107	360	13.33	3.6		
6.0	6360	120.04	2.0			119	320	11.93	3.8		
6.6	5800	109.48	2.2	WR137 WRF137	8P	39	990	36.83	0.85	WR77 WRF77	4P
4.1	9250	174.40	0.85			42	900	33.47	0.90		
4.6	9290	156.31	0.95			49	780	29.00	1.05		
5.1	7490	141.12	1.05			56	680	25.23	1.15		
5.6	6800	128.18	1.20			61	630	23.37	1.30		
6.3	6030	113.72	1.35			66	575	21.43	1.40		
7.0	5470	103.20	1.45	WR137 WRF137	6P	76	505	18.80	1.55		
4.3	8860	222.60	0.90			80	480	17.82	1.65		
5.1	7500	188.45	1.05			91	420	15.60	1.75		
5.5	6940	174.40	1.15			101	380	14.05	1.90		
6.1	6220	156.31	1.30			115	330	12.33	2.1		
6.8	5620	141.12	1.40			131	295	10.88	2.3		
7.5	5100	128.18	1.55			147	260	9.64	2.4		
8.4	4520	113.72	1.75			165	230	8.59	2.7		
9.3	4110	103.20	1.95	WR107 WRF107	4P	183	210	7.74	2.9		
11	3530	88.70	2.3			209	183	6.79	3.2		
8.2	4640	172.34	0.95			237	161	5.99	3.3		
8.9	4270	158.68	1.00			267	143	5.31	3.6		
10	3820	141.83	1.15			71	535	19.89	1.10	WR67 WRF67	4P
11	3430	127.68	1.25			79	485	17.95	1.20		
12	3110	115.63	1.40			90	425	15.79	1.30		
14	2760	102.53	1.55			95	400	14.91	1.35		
15	2490	92.70	1.70			112	340	12.70	1.50		
18	2110	78.57	2.0			123	310	11.54	1.60		
19	1960	72.88	2.2			142	270	10.00	1.75		
22	1760	65.60	2.4			163	235	8.70	1.90		
24	1600	59.41	2.7	WR97 WRF97	4P	182	210	7.79	1.80	WR57 WRF57	4P
27	1420	52.68	3.0			193	198	7.36	1.85		
12	3130	116.48	0.95			227	169	6.27	1.95		
14	2780	103.44	1.10			249	153	5.70	2.0		
15	2490	92.48	1.20			288	133	4.93	2.2		
17	2240	83.15	1.35			331	116	4.29	2.3		
20	1940	72.17	1.55			76	500	18.60	0.90		
22	1750	65.21	1.70			85	450	16.79	1.00		
24	1610	59.92	1.85	WR97 WRF97	4P	96	395	14.77	1.10		
27	1430	53.21	2.1			102	375	13.95	1.15		
30	1280	47.58	2.3			120	320	11.88	1.25		
						132	290	10.79	1.35		
						152	250	9.35	1.45		

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
4.0KW						5.5KW					
157	245	9.06	1.55	WR57 WRF57	4P	2.2	22000	656	0.80	WR167 WR97 WRF167WR97	4P
178	215	7.97	1.65			2.5	19300	579	0.95		
189	205	7.53	1.75			2.8	16900	503	1.05		
222	172	6.41	1.95			3.3	14400	432	1.25		
244	157	5.82	2.0			3.8	12600	376	1.45		
281	136	5.05	2.2			4.3	11200	335	1.60		
323	118	4.39	2.4			4.7	10100	303	1.80		
						5.1	9310	279	1.95		
140	275	10.15	0.85	WR47 WRF47	4P	3.1	15500	462	0.85	WR147 WR87 WRF147WR87	4P
157	245	9.07	0.90			3.3	14400	426	0.90		
177	215	8.01	0.95			3.9	12400	368	1.05		
204	187	6.96	0.85			4.4	11000	326	1.20		
237	161	6.00	0.95			5.1	9410	280	1.40		
252	152	5.64	1.00			5.8	8300	247	1.55		
293	131	4.85	1.15			6.7	7170	214	1.80		
327	117	4.34	1.25			7.6	6340	189	2.0		
371	103	3.83	1.40								
176	215	16.22	1.25	WR47 WRF47	2P	3.1	17000	229.71	1.05	WR167 WRF167	8P
196	195	14.56	1.35			3.8	13800	186.93	1.30		
228	168	12.54	1.50			4.6	11300	153.07	1.60		
242	158	11.79	1.55			5.1	10400	139.98	1.75		
282	136	10.15	1.70			5.8	9010	121.81	2.0		
315	121	9.07	1.80			4.3	12100	163.31	1.10	WR147 WRF147	8P
357	107	8.01	1.90			4.8	10900	146.91	1.20		
369	104	7.76	1.55			5.9	8870	119.86	1.45		
411	93	6.96	1.70			6.5	8090	109.31	1.60	WR147 WRF147	6P
477	80	6.00	1.95			5.9	8930	163.57	1.45		
507	75	5.64	2.1			6.5	8040	147.14	1.60		
589	65	4.85	2.3			8.0	6560	120.14	2.0		
660	58	4.34	2.5			8.8	5980	109.48	2.2		
746	51	3.83	2.8			10	5180	94.75	2.5		
						12	4570	83.60	2.8		
255	150	5.56	1.50	WR81 WRF81	4P	5.5	9480	128.18	0.85	WR137 WRF137	8P
280	137	5.07	1.85			6.2	8410	113.72	0.95		
316	121	4.50	2.4			6.9	7630	103.20	1.05		
375	102	3.78	3.0			8.0	6560	88.70	1.20	WR137 WRF137	6P
351	109	4.04	1.30	WR71 WRF71	4P	5.5	9540	174.40	0.85		
383	100	3.70	1.55			6.1	8550	156.31	0.95		
437	87	3.25	2.1			6.8	7720	141.12	1.05		
461	83	3.08	2.3			7.5	7010	128.18	1.15		
527	73	2.70	3.0			8.4	6220	113.72	1.30		
585	65	2.43	3.3			9.3	5650	103.20	1.40		
667	57	2.13	3.5			6.4	8180	222.60	1.00	WR137 WRF137	4P
755	51	1.88	3.7			7.6	6920	188.45	1.15		
852	45	1.67	3.9			8.2	6410	174.40	1.25		
998	38	1.42	4.1			9.1	5740	156.31	1.40		
						10	5180	141.12	1.55		
444	86	3.20	1.15	WR61 WRF61	4P	11	4710	128.18	1.70		
492	78	2.89	1.35			13	4180	113.72	1.90		
559	68	2.54	1.75			14	3790	103.20	2.1		
592	65	2.40	1.90			16	3260	88.70	2.5		
695	55	2.04	2.4			18	2970	80.91	2.7		
765	50	1.86	2.5			19	2700	73.49	3.0		
883	43	1.61	2.6			22	2390	65.20	3.3		
1015	38	1.40	2.8			24	2170	59.17	3.7		
						28	1870	50.86	4.3		
538	71	2.64	0.95	WR51 WRF51	4P	11	4690	127.68	0.90	WR107 WRF107	4P
599	64	2.37	1.10			12	4250	115.63	1.00		
696	55	2.04	1.25			14	3770	102.53	1.15		
740	52	1.92	1.35			15	3400	92.70	1.25		
859	44	1.65	1.55			18	2890	78.57	1.50		
962	40	1.48	1.70			20	2680	72.88	1.60		
1090	35	1.30	1.80								

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
5.5KW						5.5KW					
22	2410	65.60	1.80	WR107 WRF107	4P	331	159	8.70	2.8	WR67 WRF67	6P
24	2180	59.41	1.95			369	142	7.79	2.7		
27	1930	52.68	2.2			391	134	7.36	2.8		
30	1750	47.63	2.5			460	114	6.27	2.9		
35	1480	40.37	2.9			506	104	5.70	3.0		
						584	90	4.93	3.2		
						671	78	4.29	3.5		
17	3050	83.15	1.00	WR97 WRF97	4P	97	545	14.77	0.80	WR57 WRF57	4P
20	2650	72.17	1.15			103	510	13.95	0.85		
22	2390	65.21	1.25			120	435	11.88	0.95		
24	2200	59.92	1.35			132	395	10.79	1.00		
27	1950	53.21	1.55			153	345	9.35	1.10		
30	1750	47.58	1.70			179	295	7.97	1.20		
33	1570	42.78	1.90			190	275	7.53	1.25		
39	1360	37.13	2.2			223	235	6.41	1.40		
43	1220	33.25	2.4			246	215	5.82	1.50		
52	1010	27.58	2.6			283	185	5.05	1.65		
45	1180	32.05	2.2			326	161	4.39	1.75		
53	1000	27.19	2.6								
57	920	25.03	3.1								
64	820	22.37	3.3								
71	740	20.14	3.5								
78	670	18.24	3.7								
88	595	16.17	4.0								
30	1750	47.58	0.90	WR87 WRF87	4P	308	171	9.35	2.2	WR57 WRF57	2P
34	1530	41.74	1.00			361	145	7.97	2.4		
39	1350	36.84	1.15			383	137	7.53	2.5		
44	1200	32.66	1.30			449	117	6.41	2.9		
51	1020	27.88	1.45			494	106	5.82	3.0		
51	1020	27.84	1.50			571	92	5.05	3.3	WR47 WRF47	4P
61	860	23.40	1.80			656	80	4.39	3.5		
66	790	21.51	1.90								
75	700	19.10	2.0			295	178	4.85	0.85		
84	625	17.08	2.2			330	159	4.34	0.90		
93	565	15.35	2.4			373	141	3.83	1.00	WR47 WRF47	2P
107	490	13.33	2.6			230	230	12.54	1.10		
120	440	11.93	2.8			244	215	11.79	1.15		
144	365	9.90	3.2			284	185	10.15	1.25		
156	335	9.14	3.6			318	165	9.07	1.35		
174	300	8.22	3.8			359	146	8.01	1.40		
200	260	7.13	4.1			480	109	6.00	1.45		
						511	103	5.64	1.50		
						593	89	4.85	1.70		
						664	79	4.34	1.85		
						752	70	3.83	2.1		
76	690	18.80	1.15	WR77 WRF77	4P	216	245	6.63	1.90	WR101 WRF101	4P
80	655	17.82	1.20			255	205	5.61	2.2		
92	575	15.60	1.30			276	191	5.19	3.7		
102	515	14.05	1.40			307	171	4.65	4.1		
116	455	12.33	1.50								
131	400	10.88	1.65			247	215	5.79	1.95	WR91 WRF91	4P
148	355	9.64	1.80			291	180	4.91	2.2		
166	315	8.59	2.0			316	166	4.52	3.6		
185	285	7.74	2.2			354	149	4.04	4.0		
211	250	6.79	2.3			393	134	3.64	4.4		
239	220	5.99	2.5			434	121	3.30	4.9		
269	195	5.31	2.6			489	107	2.92	5.5		
						541	97	2.64	6.1		
						638	82	2.24	7.2		
						731	72	1.96	7.9		
						874	60	1.64	8.4		
						1010	52	1.42	8.8		
91	580	15.79	0.95	WR67 WRF67	4P	318	165	4.50	1.75	WR81 WRF81	4P
96	550	14.91	1.00			378	139	3.78	2.2		
113	465	12.70	1.10			411	128	3.48	3.2		
124	425	11.54	1.20			463	113	3.09	3.6		
143	365	10.00	1.30			518	101	2.76	4.0		
164	320	8.70	1.40			576	91	2.48	4.4		
183	285	7.79	1.35			664	79	2.15	4.9		
194	270	7.36	1.35								
228	230	6.27	1.45								
251	210	5.70	1.50								
290	181	4.93	1.60								
333	158	4.29	1.70								

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
5.5KW						7.5KW					
440	119	3.25	1.50	WR71 WRF71	4P	7.6	9440	188.45	0.85	WR137 WRF137	4P
464	113	3.08	1.70			8.2	8730	174.40	0.90		
530	99	2.70	2.2			9.1	7830	156.31	1.00		
589	89	2.43	2.4			10	7070	141.12	1.15		
671	78	2.13	2.6			11	6420	128.18	1.25		
761	69	1.88	2.7			13	5700	113.72	1.40		
858	61	1.67	2.8			14	5170	103.20	1.55		
1005	52	1.42	3.0			16	4440	88.70	1.80		
						18	4050	80.91	1.95		
563	93	2.54	1.25	WR61 WRF61	4P	19	3680	73.49	2.2		
596	88	2.40	1.40			22	3270	65.20	2.5		
700	75	2.04	1.80			24	2960	59.17	2.7		
770	68	1.86	1.85			28	2550	50.86	3.1		
889	59	1.61	1.95								
1020	51	1.40	2.0								
700	75	2.04	0.90	WR51 WRF51	4P	15	4640	92.70	0.95		
745	71	1.92	1.00			18	3940	78.57	1.10		
866	61	1.65	1.15			20	3650	72.88	1.20		
969	54	1.48	1.25			22	3290	65.60	1.30		
1095	48	1.30	1.30			24	2980	59.41	1.45		
						27	2640	52.68	1.65		
7.5KW						30	2390	47.63	1.80	WR107 WRF107	4P
2.8	23100	503	0.80	35	2020	40.37	2.1				
3.3	19800	432	0.90	41	1770	35.26	2.4				
3.8	17300	376	1.05	48	1480	29.49	2.9				
4.3	15400	335	1.15	46	1540	30.77	2.8				
4.7	13900	303	1.30	52	1380	27.58	3.1				
5.1	12800	279	1.40	57	1250	24.90	3.5				
				63	1130	22.62	3.8				
4.4	15000	326	0.85	WR147 WR87 WRF147WR87	4P	24	3000	59.92	1.00	WR97 WRF97	4P
5.1	12900	280	1.00			27	2670	53.21	1.15		
5.8	11400	247	1.15			30	2380	47.58	1.25		
6.7	9810	214	1.30			33	2140	42.78	1.40		
7.6	8680	189	1.50			39	1860	37.13	1.60		
9.0	7290	159	1.80			43	1670	33.25	1.75		
3.1	22900	229.71	0.80	WR167 WRF167	8P	52	1380	27.58	1.95		
3.8	18600	186.93	0.95			45	1610	32.05	1.60		
4.7	15200	153.07	1.20			53	1360	27.19	1.90		
5.1	13900	139.98	1.30			57	1250	25.03	2.3		
5.9	12100	121.81	1.50			64	1120	22.37	2.4		
						71	1010	20.14	2.6		
						78	910	18.24	2.7		
4.2	17100	229.71	1.05	WR167 WRF167	6P	39	1840	36.84	0.85	WR87 WRF87	4P
5.1	13900	186.93	1.30			44	1640	32.66	0.95		
6.3	11400	153.07	1.60			51	1400	27.88	1.05		
6.9	10400	139.98	1.70			51	1390	27.84	1.10		
7.9	9090	121.81	2.0			61	1170	23.40	1.30		
8.9	8020	107.49	2.2			66	1080	21.51	1.40		
10	6950	93.19	2.6			75	960	19.10	1.50		
12	6190	82.91	2.9			84	860	17.08	1.65		
13	5500	73.70	3.3			93	770	15.35	1.75		
14	5030	67.40	3.6	107	670	13.33	1.90				
4.4	16200	163.57	0.80	WR147 WRF147	8P	120	600	11.93	2.1		
4.9	14600	147.14	0.90			144	495	9.90	2.4		
6.0	11900	120.04	1.10			156	460	9.14	2.6		
6.6	10900	109.48	1.20			174	410	8.22	2.8		
						200	355	7.13	3.0		
						224	320	6.39	3.2		
5.9	12200	163.57	1.05	WR147 WRF147	6P	270	265	5.30	3.4	WR77 WRF77	4P
6.5	11000	147.14	1.20			76	940	18.80	0.85		
8.0	8940	120.04	1.45			80	890	17.82	0.85		
8.8	8150	109.48	1.60			92	780	15.60	0.95		
10	7060	94.75	1.85			102	705	14.05	1.00		
12	6230	83.60	2.1			116	615	12.33	1.10		
						131	545	10.88	1.20		
						148	485	9.64	1.30		
				166	430	8.59	1.45				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
7.5KW						7.5KW							
185	390	7.74	1.55	WR77 WRF77	4P	563	127	2.54	0.95	WR61 WRF61	4P		
211	340	6.79	1.70			596	120	2.40	1.00				
239	300	5.99	1.80			700	102	2.04	1.30				
269	265	5.31	1.90			770	93	1.86	1.35				
						889	81	1.61	1.40				
						1020	70	1.40	1.50				
						11KW							
113	635	12.70	0.80	WR67 WRF67	4P	4.9	19600	295	0.90	WR167 WR107 WRF167WR107	4P		
124	580	11.54	0.85			5.3	18100	270	1.00				
143	500	10.00	0.95			6.3	15300	229	1.20				
164	435	8.70	1.00			7.2	13400	200	1.35				
183	390	7.79	0.95			8.5	11300	169	1.60				
194	370	7.36	1.00			5.0	19800	291	0.90				
228	315	6.27	1.05										
251	285	5.70	1.10										
290	245	4.93	1.15										
333	215	4.29	1.25										
179	400	7.97	0.90	WR57 WRF57	4P	4.3	22500	335	0.80	WR167 WR97 WRF167WR97	4P		
190	375	7.53	0.95			4.8	20300	303	0.90				
223	320	6.41	1.05			5.2	18700	279	0.95				
246	290	5.82	1.10			5.8	16600	247	0.80	WR147 WR87 WRF147WR87	4P		
283	255	5.05	1.20			6.7	14300	214	0.90				
326	220	4.39	1.25	7.6	12700	189	1.05						
						9.1	10700	159	1.20				
196	365	14.77	1.20	WR57 WRF57	2P	5.1	20500	186.93	0.90	WR167 WRF167	6P		
208	345	13.95	1.25			6.3	16700	153.07	1.05				
244	295	11.88	1.40			6.9	15300	139.98	1.20				
269	265	10.79	1.45			7.9	13300	121.81	1.35				
310	230	9.35	1.60			6.3	16800	229.71	1.05	WR167 WRF167	4P		
364	197	7.97	1.80			7.7	13600	186.93	1.30				
385	186	7.53	1.90			9.4	11200	153.07	1.60				
452	158	6.41	2.1			10	10200	139.98	1.75				
498	144	5.82	2.2			12	8890	121.81	2.0				
575	125	5.05	2.5			13	7840	107.49	2.3				
660	108	4.39	2.6			15	6800	93.19	2.7				
						17	6050	82.91	3.0				
216	330	6.63	1.40	WR101 WRF101	4P	6.5	16100	147.14	0.80	WR147 WRF147	6P		
255	280	5.61	1.60			8.0	13100	120.04	1.00				
276	260	5.19	2.7			8.8	12000	109.48	1.10				
307	235	4.65	3.0			10	10400	94.75	1.25				
340	210	4.20	3.9			12	9130	83.60	1.40				
247	290	5.79	1.45	WR91 WRF91	4P	8.8	11900	163.57	1.10	WR147 WRF147	4P		
291	245	4.91	1.60			9.8	10700	147.14	1.20				
316	225	4.52	2.6			12	8740	120.04	1.50				
354	205	4.04	2.9			13	7970	109.48	1.65				
393	182	3.64	3.3			15	6900	94.75	1.90				
434	165	3.30	3.6			17	6090	83.60	2.1				
489	146	2.92	4.1			20	5260	72.20	2.5				
318	225	4.50	1.30	WR81 WRF81	4P	22	4890	67.09	2.7				
378	189	3.78	1.60			24	4460	61.19	2.9				
411	174	3.48	2.3			27	3860	52.96	3.4				
463	155	3.09	2.6			10	10300	141.12	0.80	WR137 WRF137	4P		
518	138	2.76	2.9			11	9350	128.18	0.85				
576	124	2.48	3.3			13	8300	113.72	0.95				
664	108	2.15	3.6			14	7530	103.20	1.05				
741	97	1.93	3.7			16	6470	88.70	1.25				
894	80	1.60	3.9			18	5900	80.91	1.35				
1030	70	1.39	4.2			20	4360	73.49	1.50				
				22	4760	65.20	1.70						
440	163	3.25	1.10	WR71 WRF71	4P	24	4320	59.17	1.85				
464	154	3.08	1.25			28	3710	50.86	2.2				
530	135	2.70	1.60			32	3240	44.39	2.5				
589	122	2.43	1.75			38	2750	37.65	2.9				
671	107	2.13	1.85			44	2400	32.91	3.3				
761	94	1.88	2.0										
858	84	1.67	2.1										
1005	71	1.42	2.2										

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
11KW						11KW					
22	4790	65.60	0.90	WR 107 WRF107	4P	545	193	2.64	3.1	WR91 WRF91	4P
24	4330	59.41	1.00			643	163	2.24	3.6		
27	3840	52.68	1.10			736	143	1.96	4.0		
30	3470	47.63	1.25			880	119	1.64	4.2		
36	2940	40.37	1.45			1015	103	1.42	4.4		
41	2570	35.26	1.65								
49	2150	29.49	2.0			414	255	3.48	1.60	WR81 WRF81	4P
47	2240	30.77	1.90			466	225	3.09	1.80		
52	2010	27.58	2.1			522	200	2.76	2.0		
58	1820	24.90	2.4			580	181	2.48	2.2		
64	1650	22.62	2.6			669	157	2.15	2.5		
72	1460	20.07	2.9			747	141	1.93	2.5		
79	1330	18.21	3.2			900	117	1.60	2.7		
						1035	102	1.39	2.9		
34	3120	42.78	0.95	WR97 WRF97	4P	593	177	2.43	1.20	WR71 WRF71	4P
39	2710	37.13	1.10			676	155	2.13	1.30		
43	2430	33.25	1.20			766	137	1.88	1.35		
52	2010	27.58	1.35			864	122	1.67	1.40		
58	1830	25.03	1.55			1010	104	1.42	1.50		
64	1630	22.37	1.65			15KW					
71	1470	20.14	1.80			6.4	20700	229	0.85	WR167 WR107 WRF167WR107	4P
79	1330	18.24	1.90			7.3	18100	200	1.00		
89	1180	16.17	2.0			8.6	15200	169	1.20		
98	1070	14.62	2.2			6.4	20800	227	0.85		
116	900	12.39	2.4			7.4	18100	198	1.00		
133	790	10.83	2.7			6.3	22600	153.07	0.80	WR167 WRF167	6P
155	675	9.29	3.0			6.9	20700	139.98	0.85		
172	610	8.39	3.3			8.0	18000	121.81	1.00		
202	520	7.12	3.8			9.0	15900	107.49	1.15		
232	455	6.21	4.2			6.4	22500	229.71	0.80	WR167 WRF167	4P
67	1570	21.51	0.95	WR87 WRF87	4P	7.8	18300	186.93	1.00		
75	1390	19.10	1.05			9.5	15000	153.07	1.20		
84	1250	17.08	1.10			10	13700	139.98	1.30		
94	1120	15.35	1.20			12	12000	121.81	1.50		
108	970	13.33	1.30			14	10500	107.49	1.70		
121	870	11.93	1.40			16	9140	93.19	1.95		
145	720	9.90	1.65			18	8130	82.91	2.2		
158	665	9.14	1.80			20	7230	73.70	2.5		
175	600	8.22	1.95			22	6610	67.40	2.7		
202	520	7.13	2.1								
225	465	6.39	2.2			8.9	16100	109.48	0.80	WR147 WRF147	6P
272	385	5.30	2.3			10	14000	94.75	0.95		
132	795	10.88	0.85	WR77 WRF77	4P	12	12300	83.60	1.05		
149	705	9.64	0.90			13	10600	72.20	1.20		
186	565	7.74	1.10			14	9890	67.09	1.30		
212	495	6.79	1.15			8.9	16000	163.57	1.80	WR147 WRF147	4P
240	435	5.99	1.25	WR101 WRF101	4P	9.9	14400	147.14	0.90		
271	390	5.31	1.30			12	11800	120.04	1.10		
277	380	5.19	1.85			13	10700	109.48	1.20		
310	340	4.65	2.0			15	9280	94.75	1.40		
343	305	4.20	2.7			17	8190	83.60	1.60		
377	280	3.81	3.0			20	7070	72.20	1.85		
425	245	3.38	3.4			22	6570	67.09	2.0		
469	225	3.07	3.7	WR91 WRF91	4P	24	5990	61.19	2.2		
545	193	2.64	4.3			28	5190	52.96	2.5		
318	330	4.52	1.80			31	4580	46.73	2.8		
356	295	4.04	2.0			14	10100	103.20	0.80	WR137 WRF137	4P
396	265	3.64	2.2			16	8700	88.70	0.90		
437	240	3.30	2.5			18	7940	80.91	1.00		
493	215	2.92	2.8			20	7210	73.49	1.10		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
15KW						15KW					
22	6400	65.20	1.25	WR137 WRF137	4P	420	340	3.48	1.20	WR81 WRF81	4P
25	5800	59.17	1.40			473	305	3.09	1.35		
29	4990	50.86	1.60			529	270	2.76	1.50		
33	4360	44.39	1.85			588	245	2.48	1.65		
39	3690	37.65	2.2			678	210	2.15	1.80		
44	3230	32.91	2.5			757	189	1.93	1.90		
52	2730	27.83	2.8			913	157	1.60	2.0		
						1050	137	1.39	2.1		
31						18.5KW					
36	3960	40.37	1.10	WR107 WRF107	4P	7.8	22500	186.93	0.80	WR167 WRF167	4P
41	3460	35.26	1.25			9.6	18500	153.07	1.00		
50	2890	29.49	1.50			10	16900	139.98	1.05		
47	3020	30.77	1.40			12	14700	121.81	1.25		
53	2710	27.58	1.60			14	13000	107.49	1.40		
59	2440	24.90	1.75			16	11200	93.19	1.60		
65	2220	22.62	1.95			18	10000	82.91	1.80		
73	1970	20.07	2.2			20	8890	73.70	2.0		
80	1790	18.21	2.4			22	8130	67.40	2.2		
93	1540	15.65	2.8			25	7070	58.65	2.5		
107	1340	13.66	3.2								
53						12					
58	2460	25.03	1.15	WR97 WRF97	4P	13	13200	109.48	1.00	WR147 WRF147	4P
65	2200	22.37	1.25			15	11400	94.75	1.15		
72	1980	20.14	1.30			18	10100	83.60	1.30		
80	1790	18.24	1.40			20	8690	72.20	1.50		
90	1590	16.17	1.50			22	8080	67.09	1.60		
100	1430	14.62	1.60			24	7370	61.19	1.75		
118	1220	12.39	1.80			28	6380	52.96	2.0		
135	1060	10.83	1.95			31	5630	46.73	2.3		
157	910	9.29	2.2			36	4860	40.35	2.7		
174	820	8.39	2.5								
205	700	7.12	2.9								
235	610	6.21	3.1								
85						18					
95	1510	15.35	0.90	WR87 WRF87	4P	20	9760	80.91	0.80	WR137 WRF137	4P
110	1310	13.33	1.00			22	8860	73.49	0.90		
122	1170	11.93	1.05			25	7860	65.20	1.00		
147	970	9.90	1.20			29	7140	59.17	1.10		
160	900	9.14	1.35			33	6130	50.86	1.30		
178	810	8.22	1.45			39	5350	44.39	1.50		
205	700	7.13	1.55			45	4540	37.65	1.75		
229	625	6.39	1.65			53	3970	32.91	2.0		
275	520	5.30	1.75			50	3360	27.83	2.3		
						50	3570	29.57	2.2		
						61	2910	24.12	2.8		
						67	2650	22.00	3.0		
						77	2300	19.04	3.5		
				87	2030	16.80	4.0				
281						36					
314	455	4.65	1.50	WR101 WRF101	4P	42	4870	40.37	0.90	WR107 WRF107	4P
348	410	4.20	2.0			50	4250	35.26	1.00		
383	375	3.81	2.2			59	3560	29.49	1.20		
431	330	3.38	2.5			65	3000	24.90	1.45		
475	300	3.07	2.8			73	2730	22.62	1.60		
553	260	2.64	3.2			80	2420	20.07	1.80		
634	225	2.30	3.7			80	2200	18.21	1.95		
747	192	1.95	4.0			94	1890	15.65	2.3		
855	168	1.71	4.2			107	1650	13.66	2.6		
1010	142	1.44	4.6			126	1400	11.59	3.1		
						145	1220	10.13	3.5		
						186	950	7.86	3.1		
				220	800	6.66	3.7				
323						73					
361	395	4.04	1.50	WR91 WRF91	4P	80	2430	20.14	1.05	WR97 WRF97	4P
401	355	3.64	1.65			80	2200	18.24	1.15		
443	325	3.30	1.85			91	1950	16.17	1.25		
499	285	2.92	2.1			100	1760	14.62	1.30		
552	260	2.64	2.3			118	1760	14.62	1.30		
652	220	2.24	2.7			118	1490	12.39	1.45		
746	192	1.96	3.0			135	1310	10.83	1.60		
892	161	1.64	3.2			158	1120	9.29	1.80		
1030	139	1.42	3.3								

WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
18.5KW						22KW							
175	1010	8.39	2.0	WR97 WRF97	4P	22	9350	65.20	0.85	WR137 WRF137	4P		
206	860	7.12	2.3			25	8480	59.17	0.95				
236	750	6.21	2.5			29	7290	50.86	1.10				
282	625	5.20	2.8			33	6370	44.39	1.25				
326	545	4.50	3.0			39	5400	37.65	1.50				
						45	4720	32.91	1.70				
						53	3990	27.83	1.90				
						50	4240	29.57	1.85				
						61	3460	24.12	2.3				
						67	3150	22.00	2.5				
						77	2730	19.04	2.9				
						87	2410	16.80	3.3				
						101	2080	14.51	3.8				
						114	1840	12.83	4.3				
						42	5060	35.26	0.85				
						50	4230	29.49	1.00				
						59	3570	24.90	1.20				
						65	3240	22.62	1.35				
						73	2880	20.07	1.50				
						80	2610	18.21	1.65				
						94	2240	15.65	1.90				
						107	1960	13.66	2.2				
						126	1660	11.59	2.6				
						145	1450	10.13	3.0				
						171	1230	8.56	3.5				
						186	1130	7.86	2.6				
						220	960	6.66	3.1				
						252	840	5.82	3.6				
						73	2890	20.14	0.90				
						80	2620	18.24	0.95				
						91	2320	16.17	1.05				
						100	2100	14.62	1.10				
						118	1780	12.39	1.25				
						135	1550	10.83	1.35				
						158	1330	9.29	1.50				
						175	1200	8.39	1.70				
						206	1020	7.12	1.95				
						236	890	6.21	2.1				
						282	745	5.20	2.4				
						326	645	4.50	2.5				
						148	1420	9.90	0.85				
						160	1310	9.14	0.90				
						178	1180	8.22	1.00				
						205	1020	7.13	1.05				
						229	920	6.39	1.10				
276	760	5.30	1.20										
						349	600	4.20	1.40				
						384	545	3.81	1.50				
						433	485	3.38	1.70				
						477	440	3.07	1.90				
						555	380	2.64	2.2				
						636	330	2.30	2.5				
						750	280	1.95	2.7				
						858	245	1.71	2.9				
						1015	205	1.44	3.1				
												402	520
444	475	3.30	1.25										
501	420	2.92	1.40										
554	380	2.64	1.55										
654	320	2.24	1.85										
749	280	1.96	2.0										
895	235	1.64	2.2										
1035	205	1.42	2.2										

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
22KW						30KW							
531	395	2.76	1.00	WR81 WRF81	4P	283	1010	5.20	1.75	WR97 WRF97	4P		
590	355	2.48	1.15			327	880	4.50	1.85				
680	310	2.15	1.25			434	660	3.38	1.25	WR101 WRF101	4P		
760	275	1.93	1.30			479	600	3.07	1.40				
916	230	1.60	1.35			557	515	2.64	1.60				
1055	200	1.39	1.45	638	450	2.30	1.85						
30KW						752	380	1.95	2.0			WR91 WRF91	4P
14	20900	107.49	0.85	WR167 WRF167	4P	860	335	1.71	2.1				
16	18200	93.19	1.00			1020	280	1.44	2.3				
18	16200	82.91	1.10			503	570	2.92	1.05				
20	14400	73.70	1.25			556	515	2.64	1.15				
22	13100	67.40	1.35			656	435	2.24	1.35				
25	11400	58.65	1.55			751	380	1.96	1.50				
28	10100	51.76	1.80			898	320	1.64	1.60				
33	8740	44.87	2.1			1040	275	1.42	1.65				
37	7780	39.92	2.3			37KW							
43	6710	34.41	2.7			16	22400	93.19	0.80	WR167 WRF167	4P		
53	5450	27.96	3.3			18	19900	82.91	0.90				
62	4620	23.71	3.9			20	17700	73.70	1.00				
30KW						22	16200	67.40	1.10				
18	16300	83.60	0.80	WR147 WRF147	4P	25	14100	58.65	1.30				
20	14000	72.20	0.95			28	12400	51.76	1.45				
22	13100	67.09	1.00			33	10800	44.87	1.65				
24	11900	61.19	1.10			37	9600	39.92	1.90				
28	10300	52.96	1.25			43	8270	34.41	2.2				
32	9090	46.73	1.45			53	6720	27.96	2.7				
36	7850	40.35	1.65			48	7380	30.71	1.35				
41	6950	35.69	1.85			60	5900	24.57	2.4				
49	5840	30.00	2.2			67	5250	21.85	2.5				
61	4710	24.23	2.5			77	4580	19.03	3.5				
72	3980	20.47	3.0			87	4080	16.98	3.7				
82	3510	18.06	3.0			30KW							
94	3050	15.66	4.3			22	16100	67.09	0.80			WR147 WRF147	4P
30KW						24	14700	61.19	0.90				
29	9910	50.86	0.80	WR137 WRF137	4P	28	12700	52.96	1.00				
33	8650	44.39	0.90			32	11200	46.73	1.15				
39	7340	37.65	1.10			36	9680	40.35	1.35				
45	6410	32.91	1.25			41	8570	35.69	1.50				
53	5420	27.83	1.40			49	7200	30.00	1.80				
61	4700	24.12	1.70			61	5810	24.23	2.0				
67	4290	22.00	1.85			72	4910	20.47	2.4				
77	3710	19.04	2.2			82	4340	18.06	2.4				
88	3270	16.80	2.4			94	3760	15.66	3.5				
101	2830	14.51	2.8			106	3340	13.93	3.8				
115	2500	12.83	3.2			30KW							
136	2100	10.79	3.8			39	9050	37.65	0.90	WR137 WRF137	4P		
194	1480	7.59	3.5			45	7910	32.91	1.00				
230	1240	6.38	4.1			53	6690	27.83	1.15				
30KW						61	5800	24.12	1.40				
73	3910	20.07	1.10	WR107 WRF107	4P	67	5290	22.00	1.50				
81	3550	18.21	1.20			77	4580	19.04	1.75				
94	3050	15.65	1.40			88	4040	16.80	2.0				
108	2660	13.66	1.60			101	3490	14.51	2.3				
127	2260	11.59	1.90			115	3080	12.83	2.6				
145	1970	10.13	2.2			136	2590	10.79	3.1				
172	1670	8.56	2.6			169	2090	8.71	3.7				
187	1530	7.86	1.95			194	1820	7.59	2.8				
221	1300	6.66	2.3			230	1530	6.38	3.3				
252	1140	5.82	2.6			285	1240	5.15	3.7				
299	960	4.92	3.0			30KW							
30KW						73	4820	20.07	0.90	WR107 WRF107	4P		
101	2850	14.62	0.80	WR97 WRF97	4P	81	4380	18.21	1.00				
119	2420	12.39	0.90			94	3760	15.65	1.15				
136	2110	10.83	1.00			108	3280	13.66	1.30				
158	1810	9.29	1.10			127	2790	11.59	1.55				
175	1640	8.39	1.25			145	2430	10.13	1.75				
207	1390	7.12	1.45			30KW							
237	1210	6.21	1.55			30KW							



WR

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
37KW						45KW									
172	2060	8.56	2.1	WR107 WRF107	4P	434	990	3.38	0.85	WR101 WRF101	4P				
187	1890	7.86	1.55			479	900	3.07	0.90						
221	1600	6.66	1.85			557	770	2.64	1.10						
252	1400	5.82	2.1			638	675	2.30	1.25						
299	1180	4.92	2.5			752	570	1.95	1.35						
						860	500	1.71	1.40						
						1020	420	1.44	1.55						
45KW						55KW									
434	810	3.38	1.00	WR101 WRF101	4P	25	20900	58.65	0.85	WR167 WRF167	4P				
479	740	3.07	1.10			29	18400	51.76	1.00						
447	635	2.64	1.30			33	16000	44.87	1.15						
638	555	2.30	1.50			37	14200	39.92	1.25						
752	470	1.95	1.65			43	12300	34.41	1.45						
860	410	1.71	1.70							53	9960	27.96	1.80		
1020	345	1.44	1.85	62	8440	23.71	2.1								
						60	8750	24.57	1.60						
						68	7780	21.85	1.65						
						77	6780	19.03	2.4						
						87	6050	16.98	2.5						
						102	5450	14.48	3.5						
						123	4270	11.99	4.0						
						32	16600	46.73	0.80						
						37	14300	40.35	0.90						
						41	12700	35.69	1.00						
						49	10700	30.00	1.20						
						61	8610	24.23	1.40						
						72	7280	20.47	1.65						
						82	6420	18.06	1.65						
						94	5570	15.66	2.3						
						106	4950	13.93	2.5						
						123	4270	12.01	3.0						
						151	3470	9.76	3.8						
						203	2580	7.25	3.4						
						250	2100	5.89	4.1						
						77	6780	19.04	1.20						
						88	5980	16.80	1.35						
						102	5170	14.51	1.55						
						115	4570	12.83	1.75						
						137	3840	10.79	2.1						
						169	3100	8.71	2.5						
						194	2700	7.59	1.90						
						231	2270	6.38	2.2						
						286	1830	5.15	2.5						
						75KW									
						33	21700	44.87	0.85						
						37	19300	39.92	0.95						
						43	16700	34.41	1.10						
						53	13500	27.96	1.35						
						62	11500	23.71	1.55						
						60	11900	24.57	1.20						
						68	10600	21.85	1.25						
						78	9210	19.03	1.75						
						87	8220	16.98	1.85						
						102	7000	14.48	2.6						
						123	5800	11.99	2.9						
						145	4950	10.24	3.4						
						49	14500	30.00	0.90						
						61	11700	24.23	1.00						
						72	9890	20.47	1.20						
						82	8730	18.06	1.20						
						95	7570	15.66	1.70						
						106	6730	13.93	1.85						
						123	5800	12.01	2.2						
						152	4710	9.76	2.8						

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
75KW					
179	4000	8.28	3.2	WR147 WRF147	4P
204	3510	7.25	2.5		
251	2850	5.89	3.0		
296	2420	5.00	3.6		
90KW					
37	23200	39.92	0.80	WR167 WRF167	4P
43	20000	34.41	0.90		
53	16200	27.96	1.10		
62	13800	23.71	1.30		
60	14300	24.57	1.00		
68	12700	21.85	1.00		
78	11100	19.03	1.45		
87	9860	16.98	1.50		
102	8410	14.48	2.1		
123	3630	11.99	2.4		
145	5940	10.24	2.9		
72	11900	20.47	1.00	WR147 WRF147	4P
82	10500	18.06	1.00		
95	9080	15.66	1.45		
106	8080	13.93	1.55		
123	6960	12.01	1.85		
152	5660	9.76	2.3		
179	4800	8.28	2.7		
204	4210	7.25	2.1		
251	3420	5.89	2.5		
296	2900	5.00	3.0		
110KW					
53	19800	27.96	0.90	WR167 WRF167	4P
63	16800	23.71	1.05		
78	13500	19.03	1.20		
87	12000	16.98	1.25		
103	10200	14.48	1.75		
124	8480	11.99	2.0		
145	7240	10.24	2.3		
132KW					
63	20100	23.71	0.90	WR167 WRF167	4P
78	16200	19.03	1.00		
87	14400	16.98	1.05		
103	12300	14.48	1.45		
124	10200	11.99	1.65		
145	8690	10.24	1.95		
160KW					
103	14900	14.48	1.20	WR167 WRF167	4P
124	12300	11.99	1.40		
145	10500	10.24	1.60		



WR

WR17

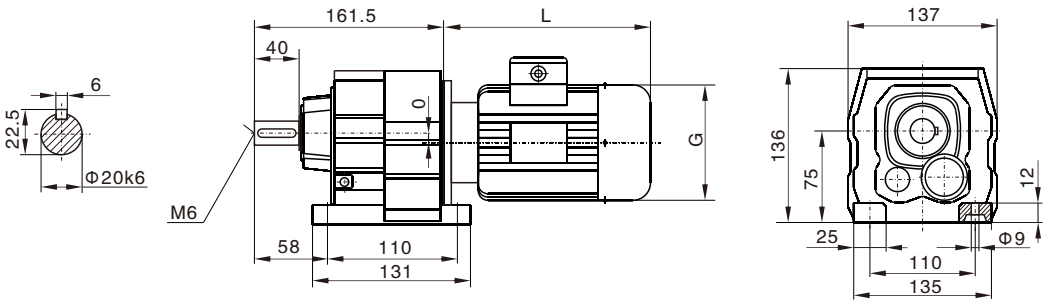



WRF17

($\Phi 120$)


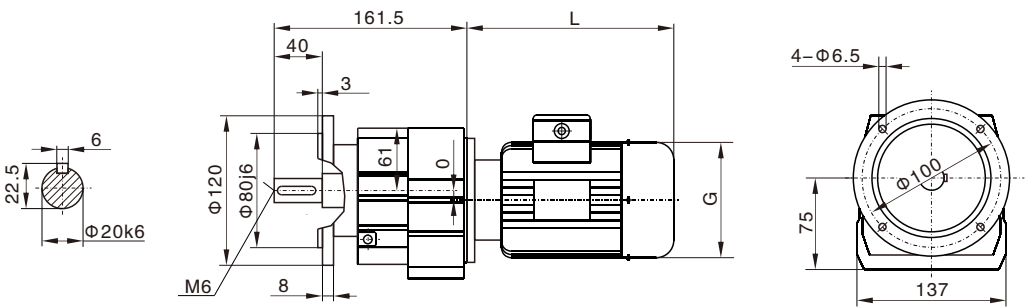


WRF17

($\Phi 140$)


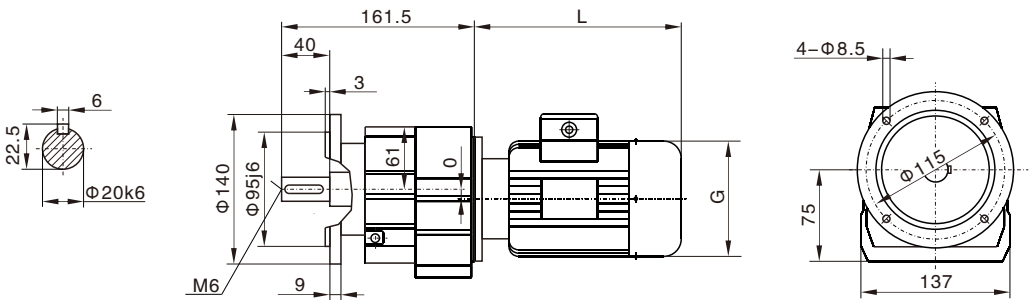


WR27

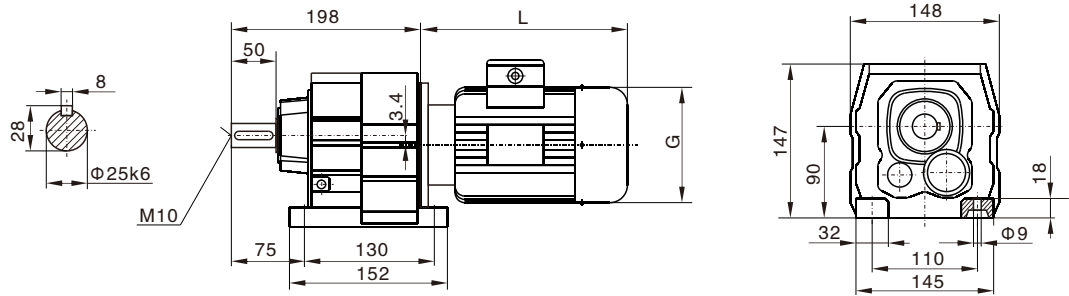



WRF27

($\Phi 120$)

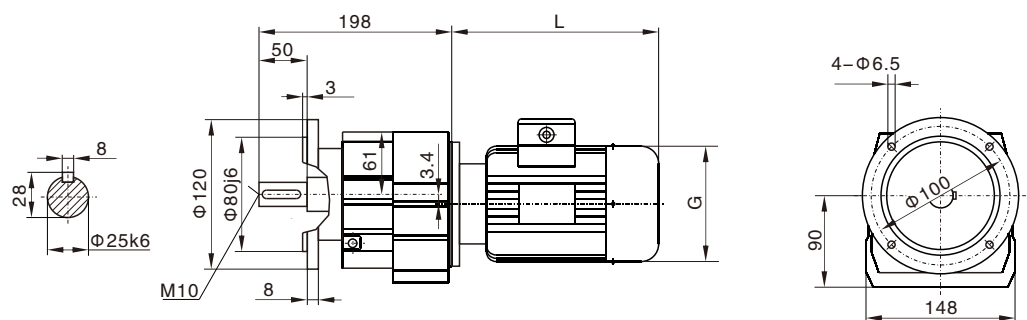



WRF27

($\Phi 140$)

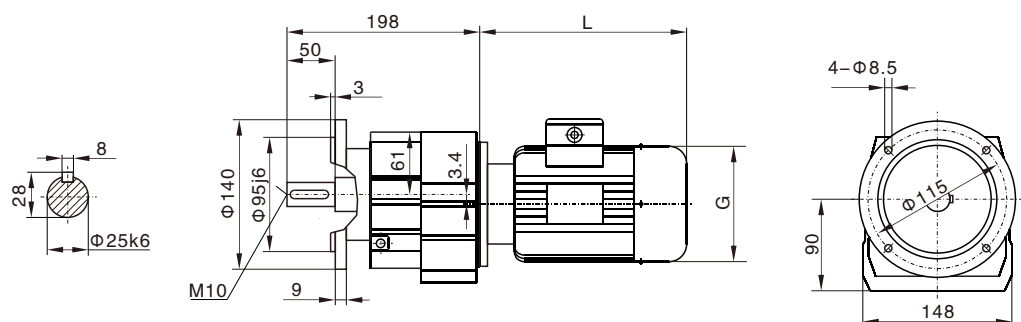



WRF27


($\Phi 160$)

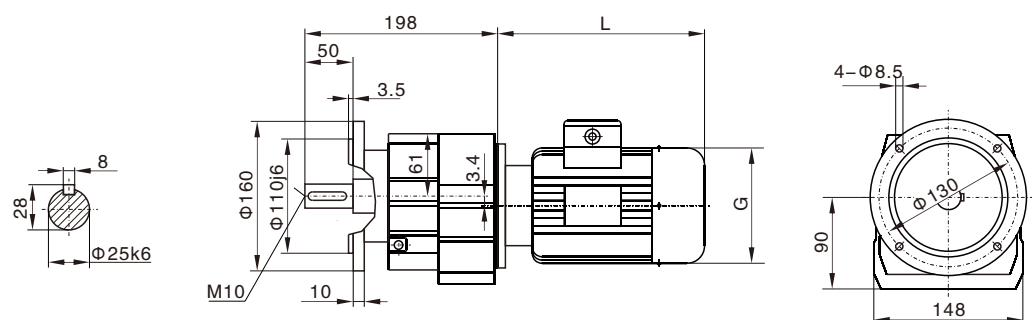

WR..27WR17

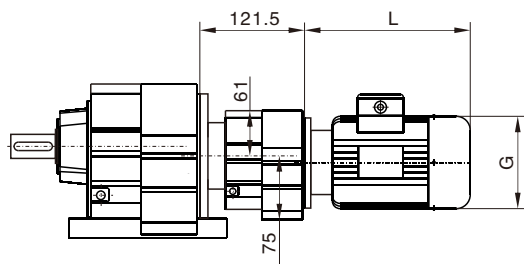


电机需方配或配特殊电机
时需加联接法兰(见第4页)





WR



WR..S17
WR..S27

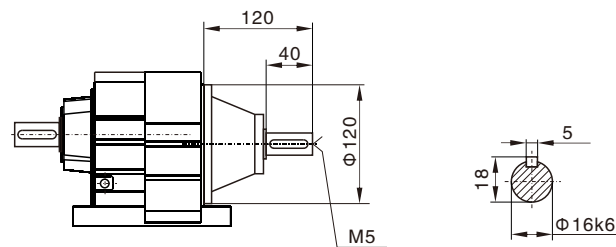



WR37

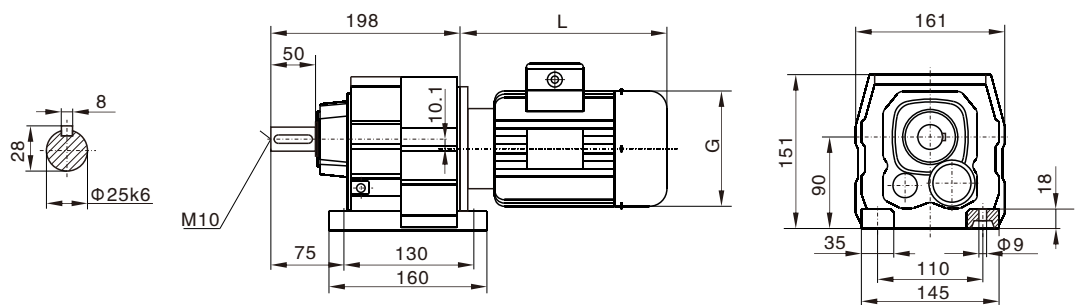

WRF37
(Φ120)


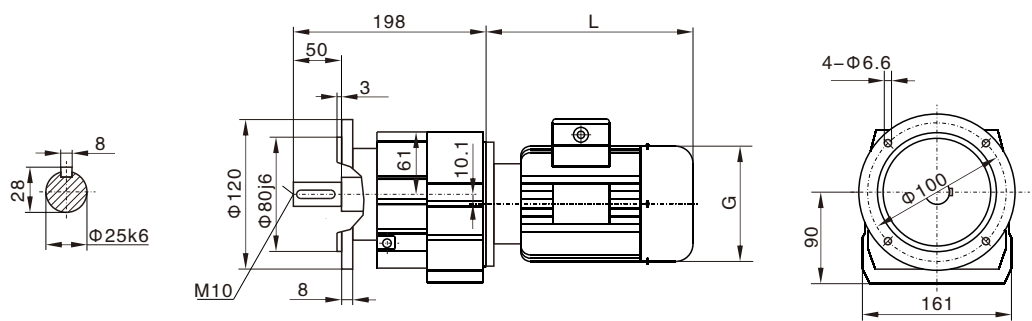


WRF37
(Φ160)


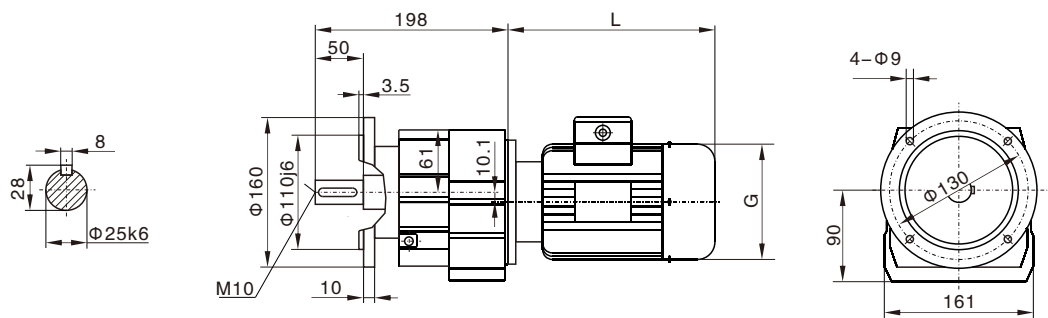


WRF37


(Φ200)

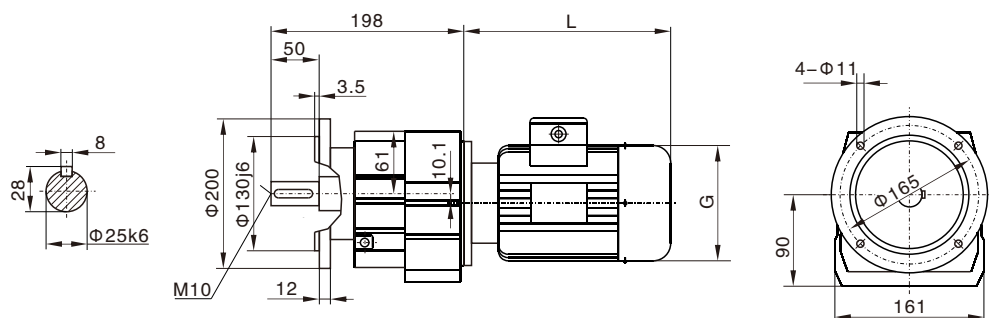


WR..37WR17

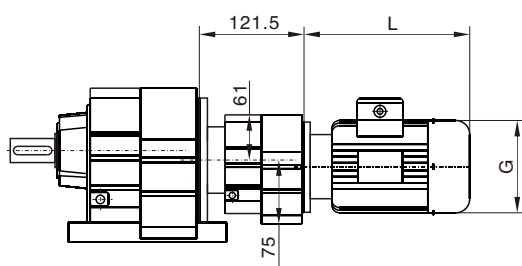



电机需方配或配特殊电机
时需加联接法兰(见第4页)



WR..S37


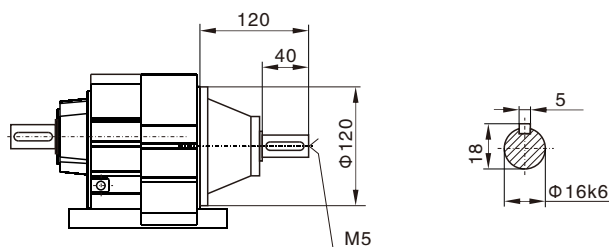


WR47

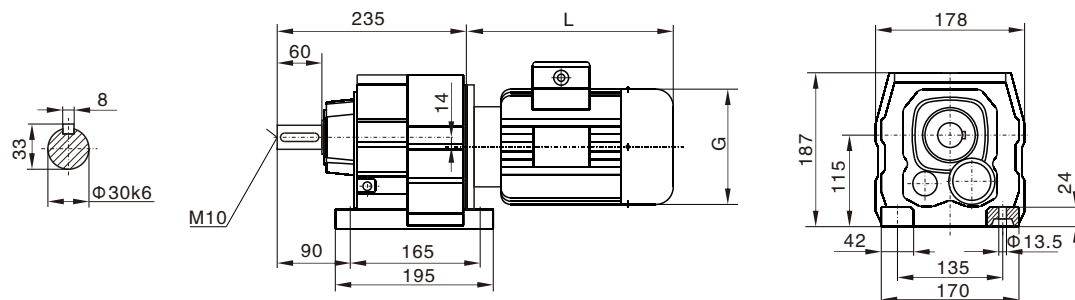



WRF47

(Φ140)

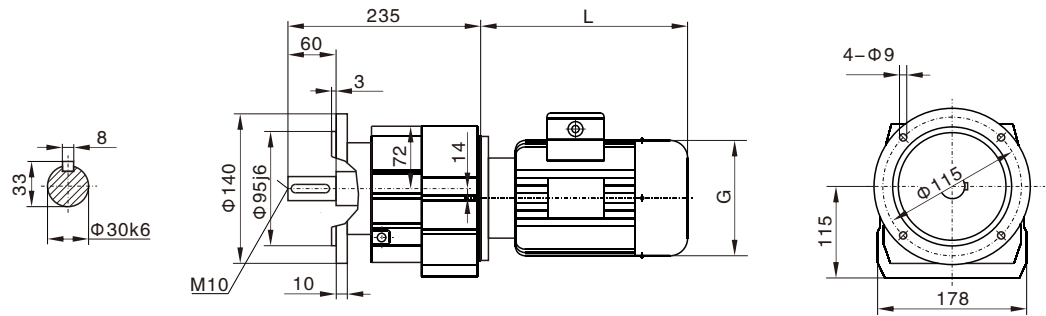



WRF47

(Φ160)

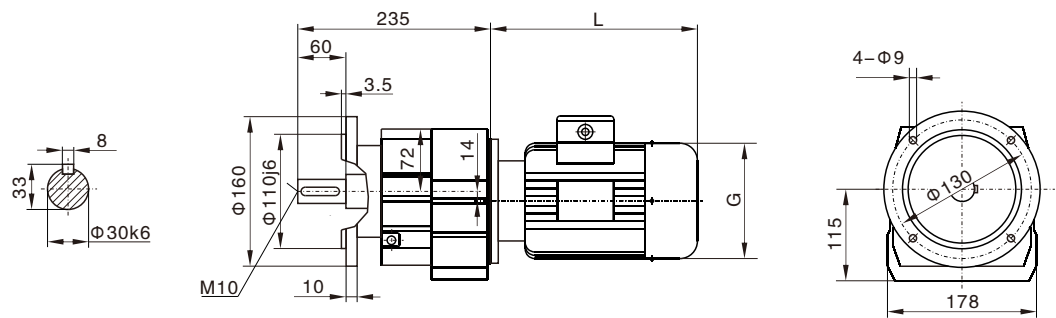


WRF47


(Φ200)

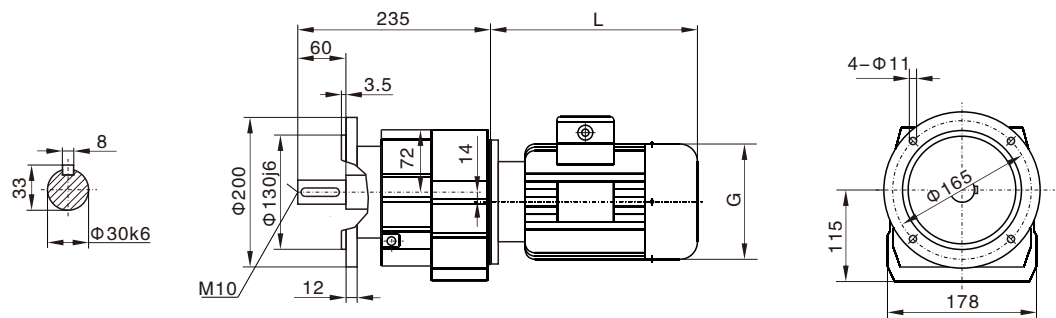



电机需方配或配特殊电机
时需加联接法兰(见第4页)

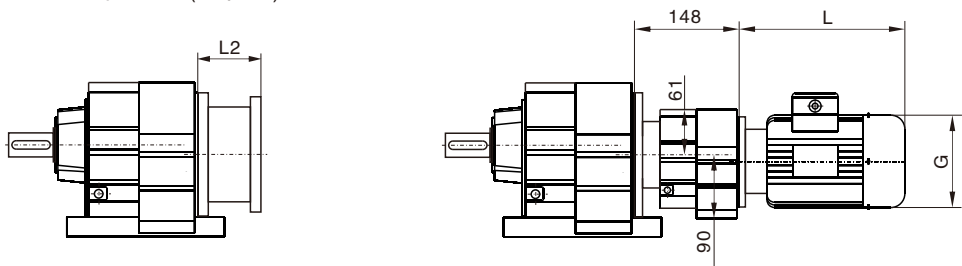



WR..47WR37



WR..S47

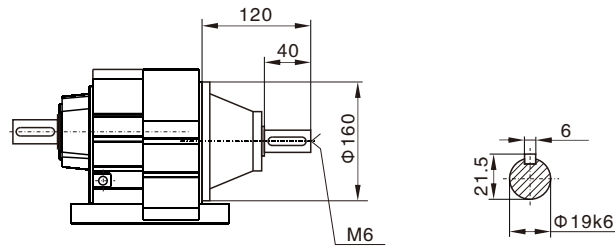



WR57

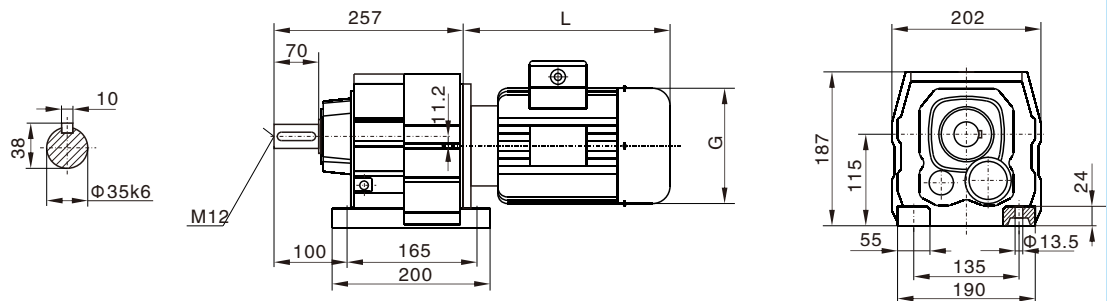



WRF57

($\Phi 160$)

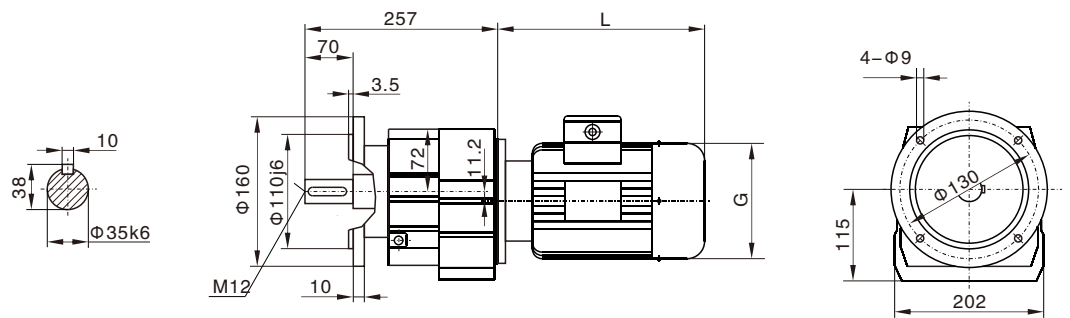

WRF57



($\Phi 200$)

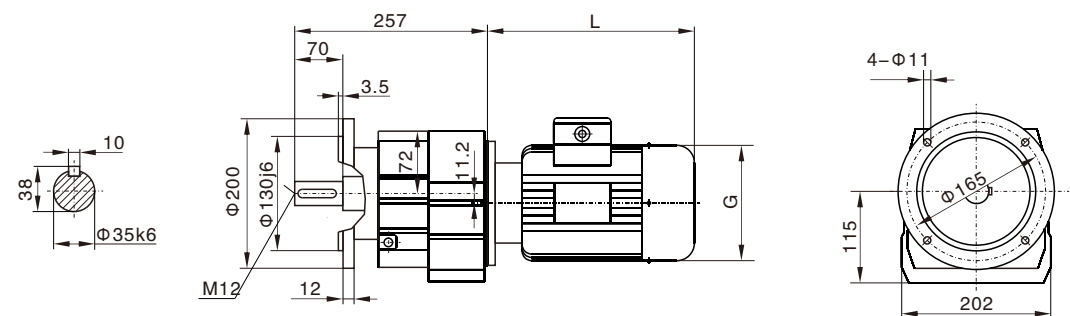


WR

WRF57


(Φ250)

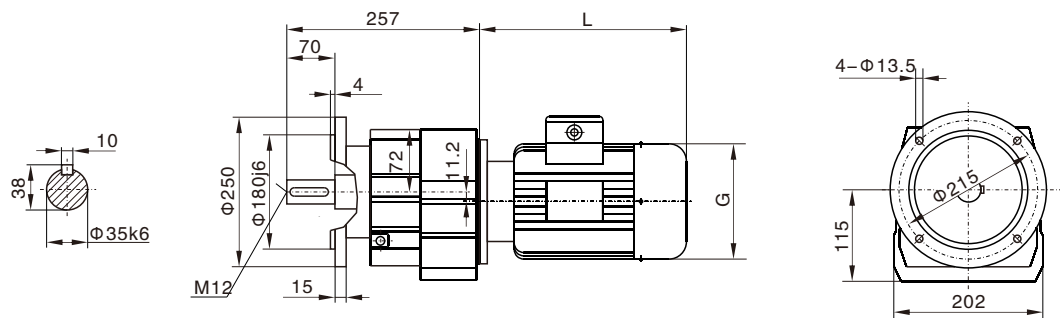



电机需方配或配特殊电机
时需加联接法兰(见第4页)

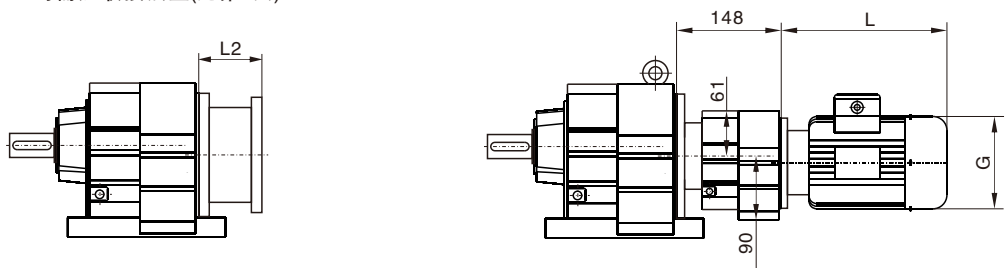



WR..57WR37



WR..S57


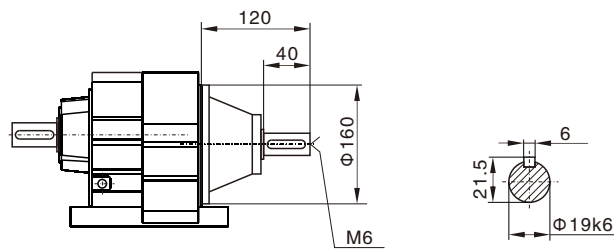


WR67

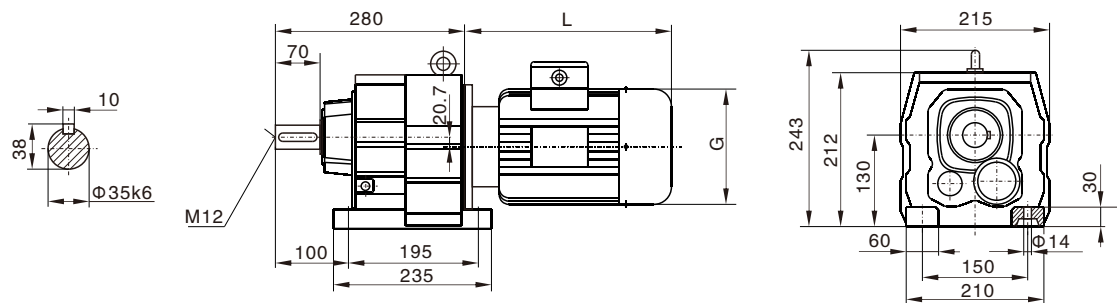



WRF67

($\Phi 200$)

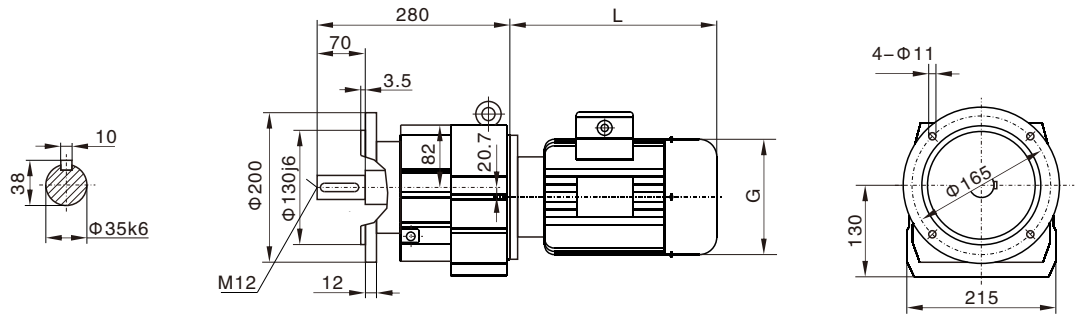



WRF67

($\Phi 250$)

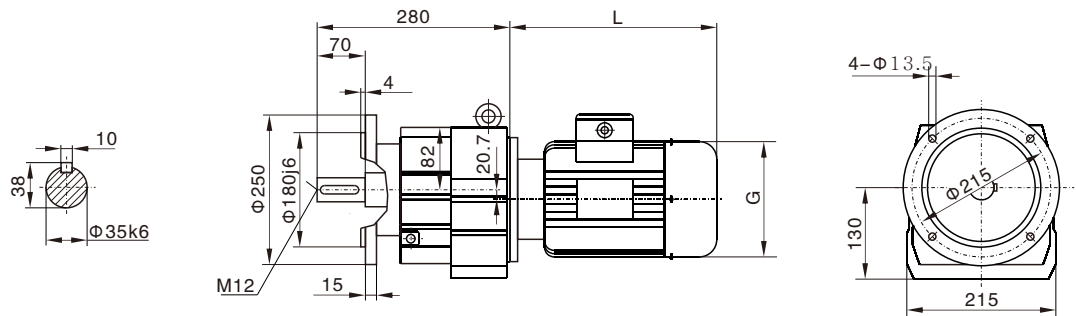


WR..67WR37

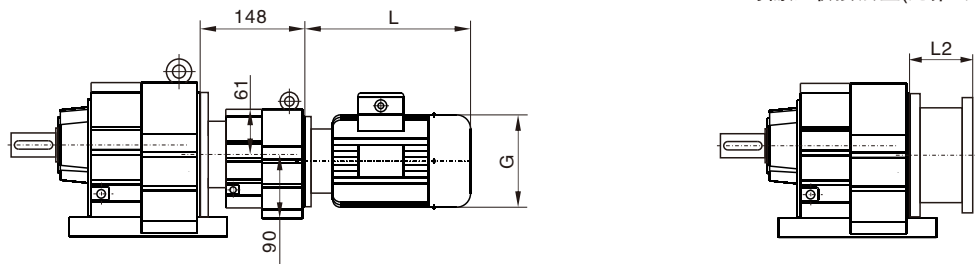



电机需方配或配特殊电机
时需加联接法兰(见第4页)

WR..S67


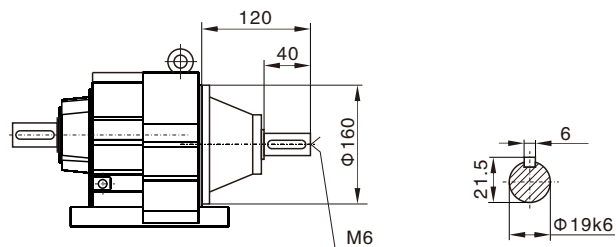


WR77

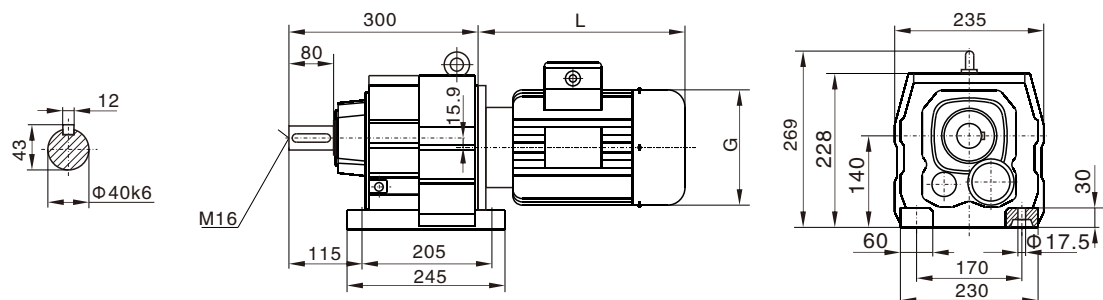



WRF77

(Φ250)

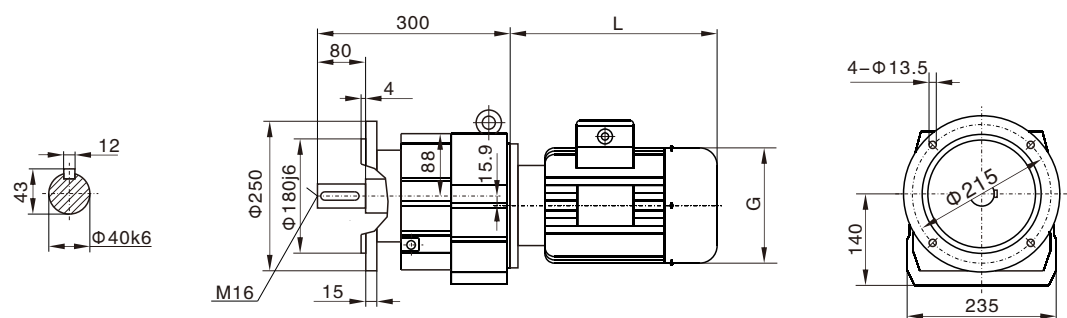



WRF77

(Φ300)


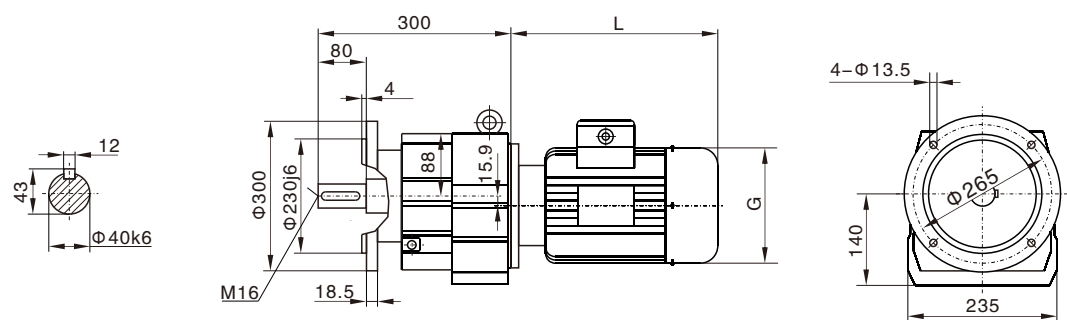


WR..77WR37




电机需方配或配特殊电机
时需加联接法兰(见第4页)

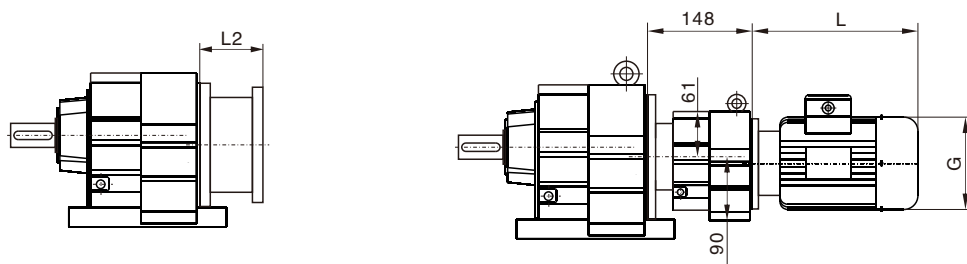

WR..S77


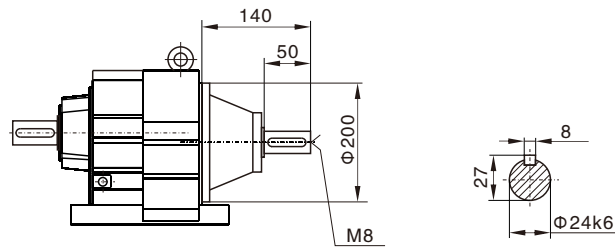



WR87

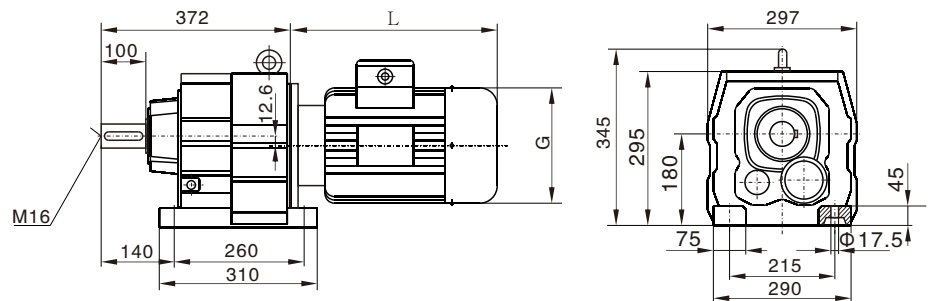




WRF87

($\Phi 300$)

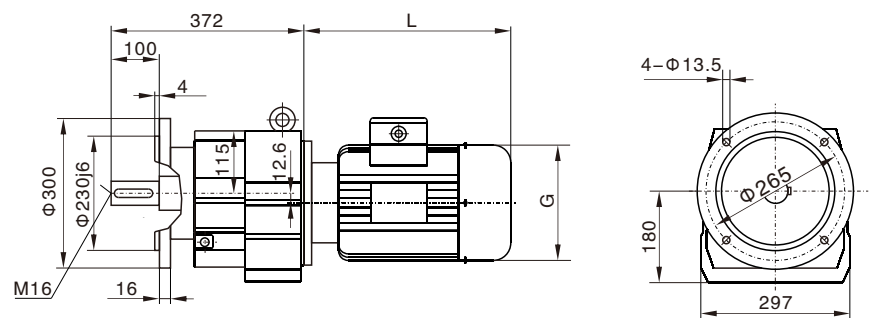



WRF87

($\Phi 350$)

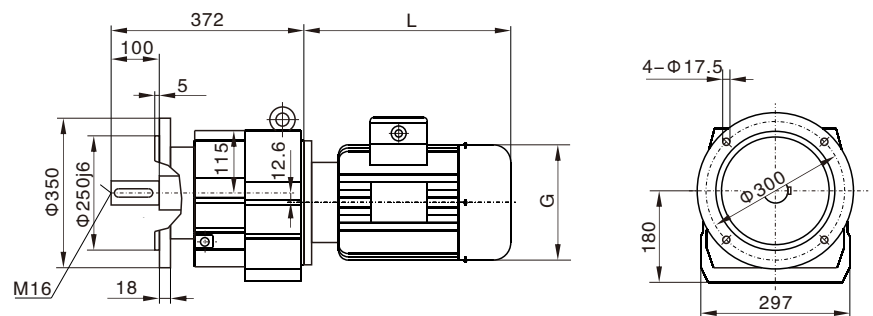



WR..87WR57



电机需方配或配特殊电机
时需加联接法兰(见第4页)

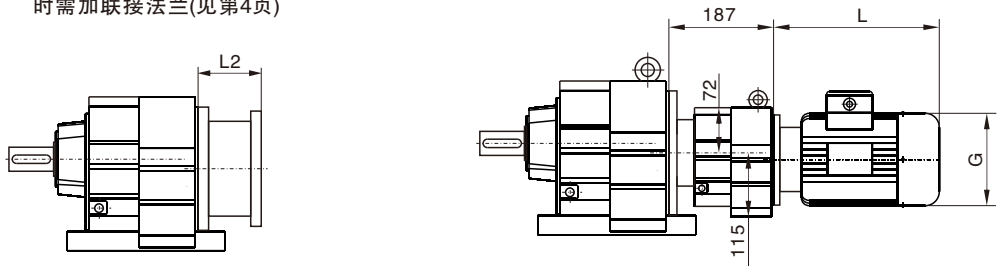

WR..S87


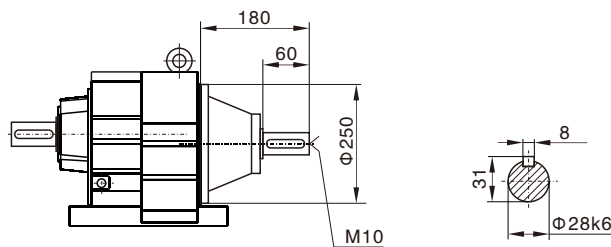


WR97

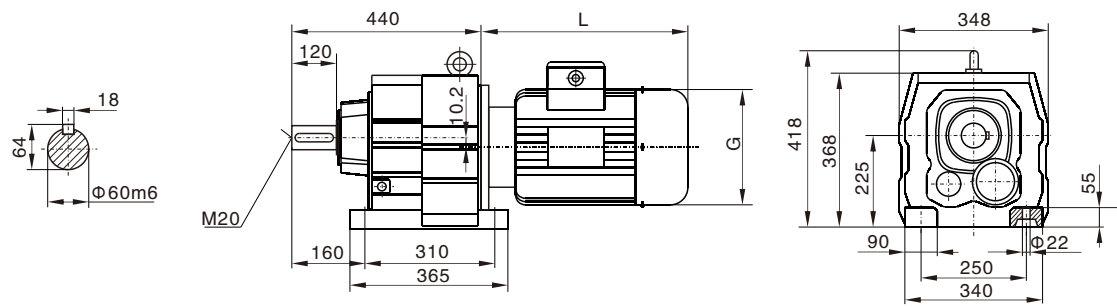





WRF97

(Φ350)


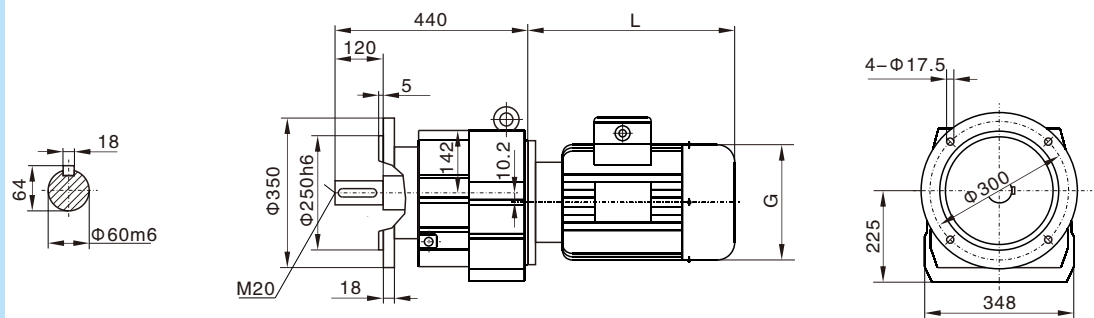


WRF97


($\Phi 450$)

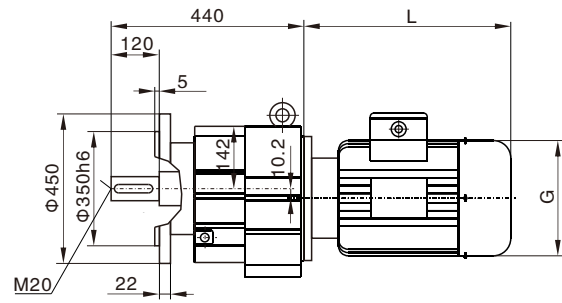




WR..97WR57

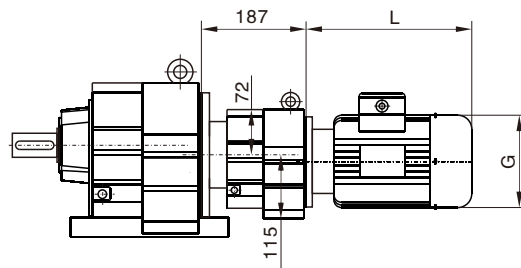





电机需方配或配特殊电机
时需加联接法兰(见第4页)



WR..S97

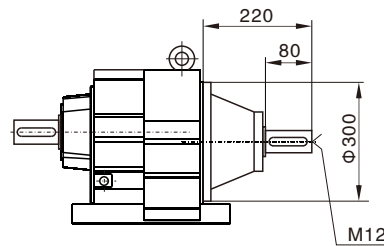



WR107

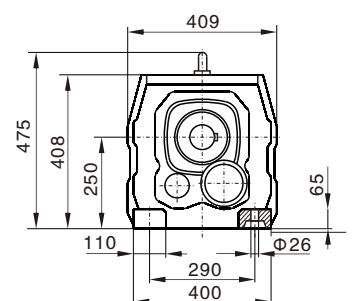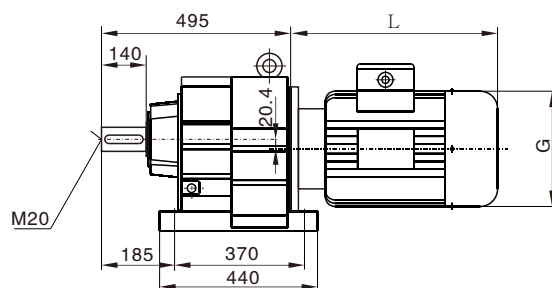



WRF107

(Φ350)

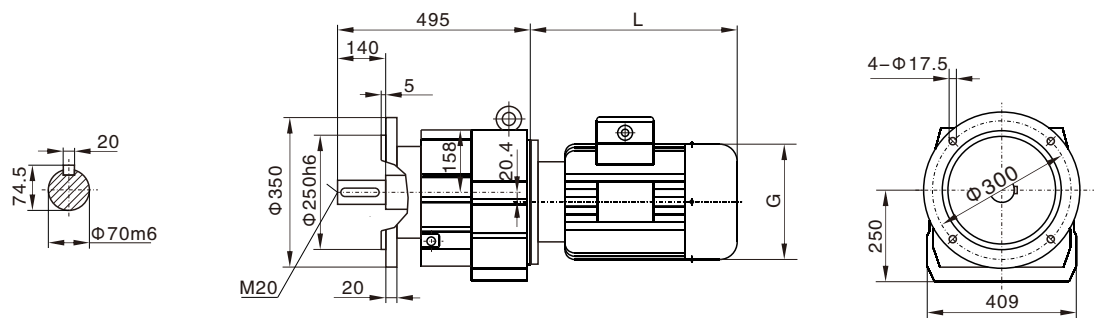



WRF107

(Φ450)


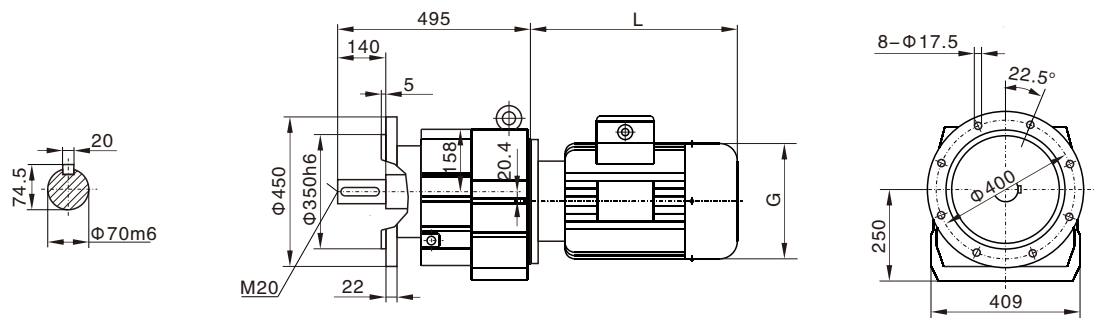


WR..107WR77



电机需方配或配特殊电机
时需加联接法兰(见第4页)

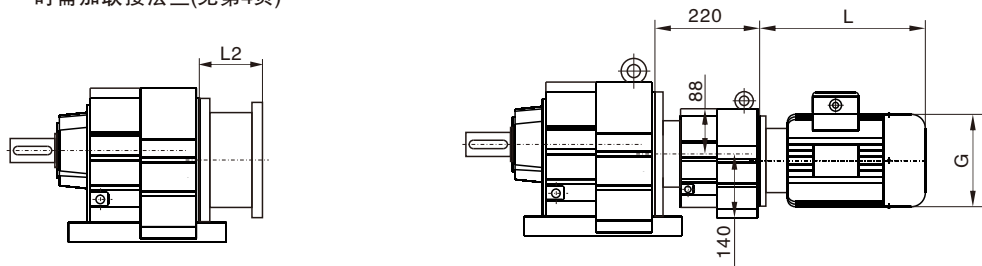

WR..S107


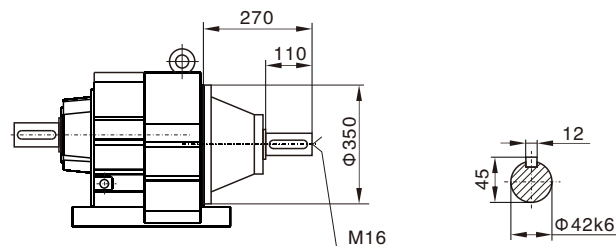


WR137

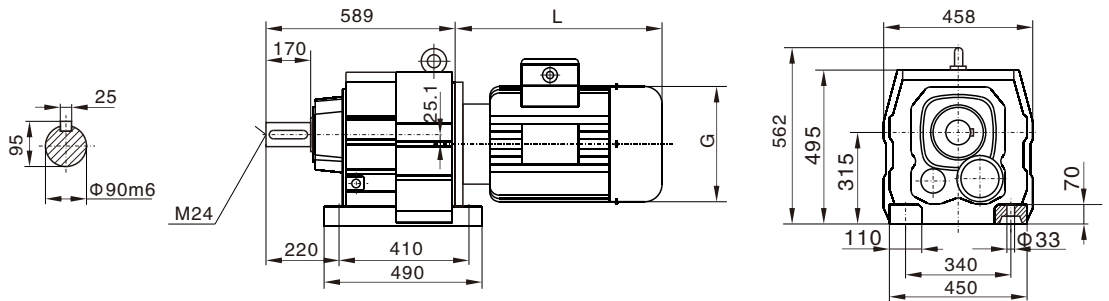



WRF137

($\Phi 450$)

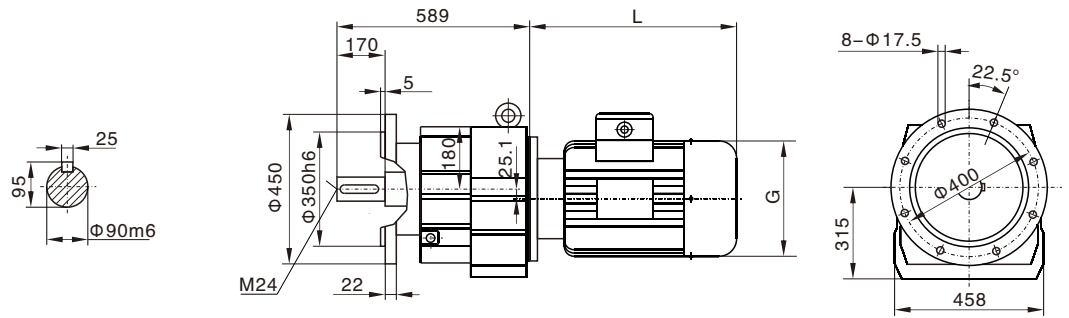



WRF137


($\Phi 550$)

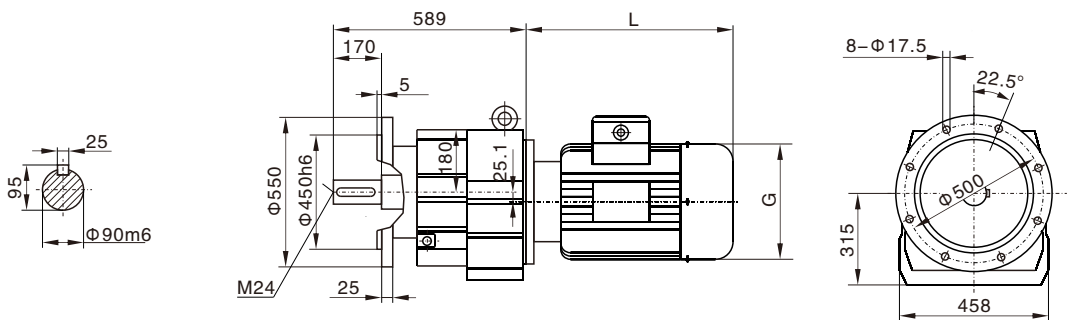



WR..137WR77

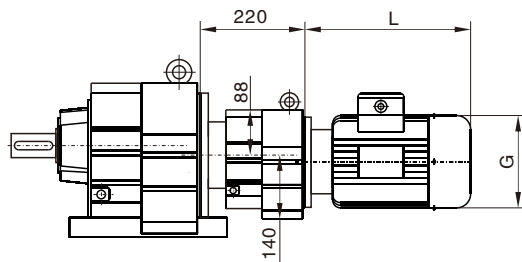



电机需方配或配特殊电机
时需加联接法兰(见第4页)





WR..S137

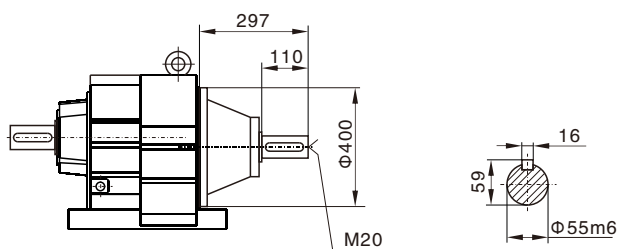



WR147

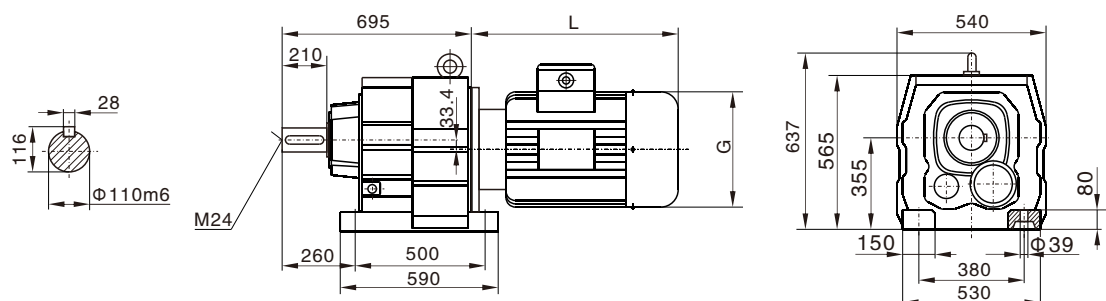


WRF147

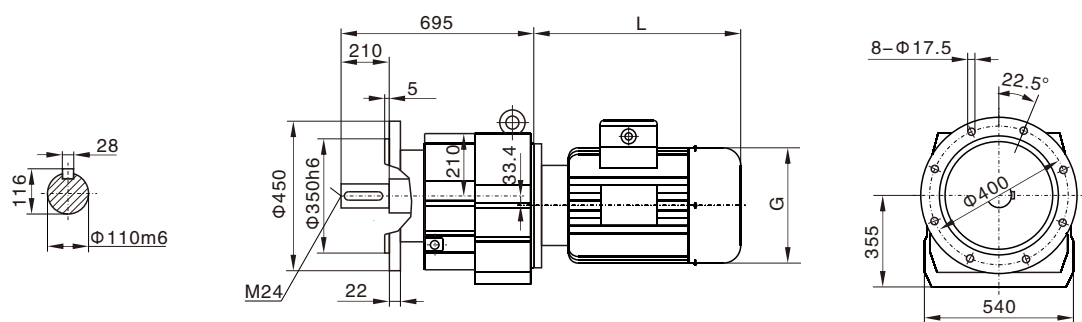($\Phi 450$)


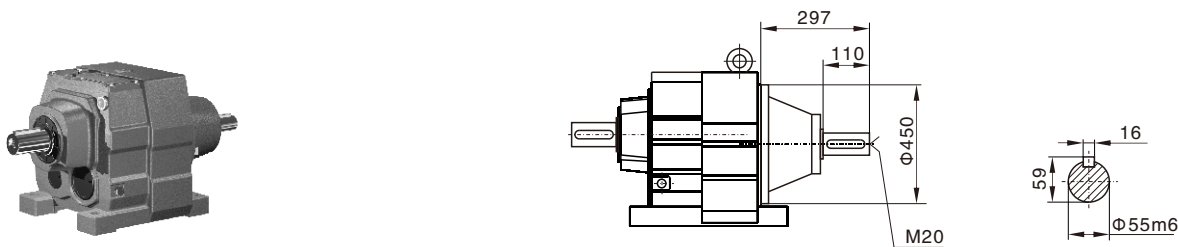
WRF147

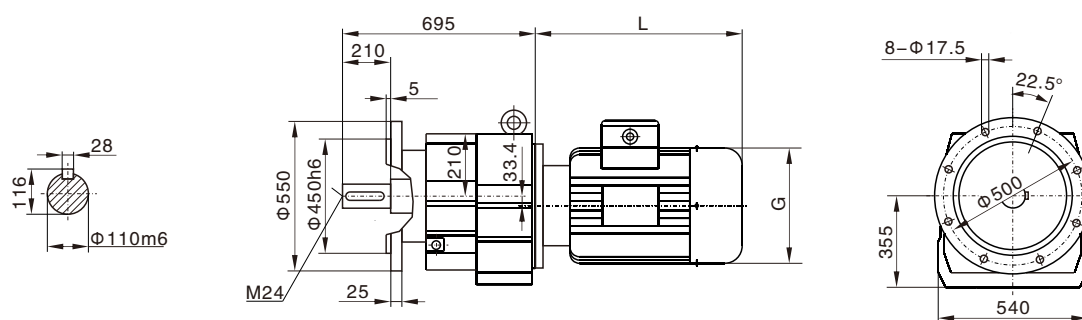($\Phi 550$)


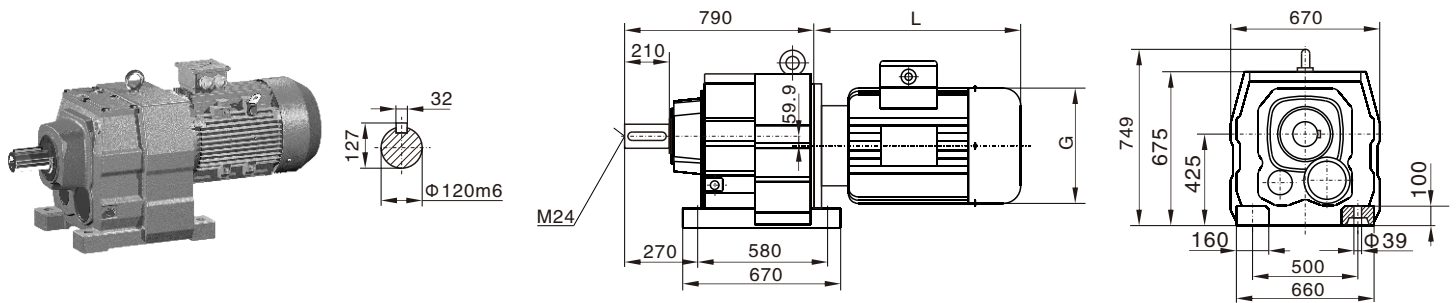
WR..147WR77(87)

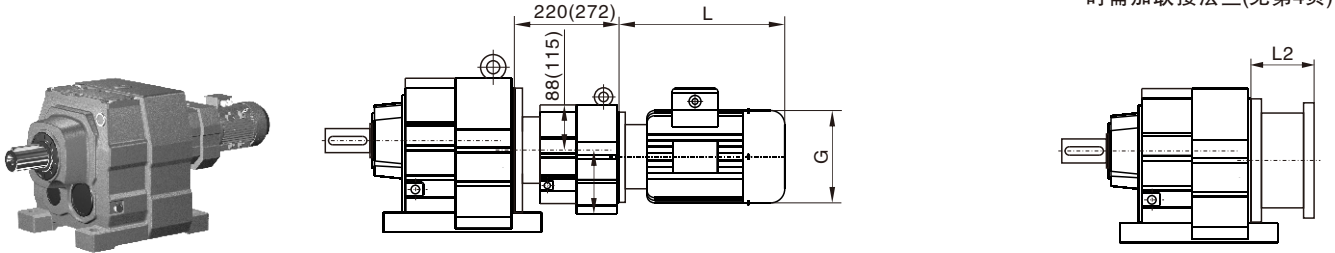

WR..S147




WR167



WRF167



($\Phi 550$)

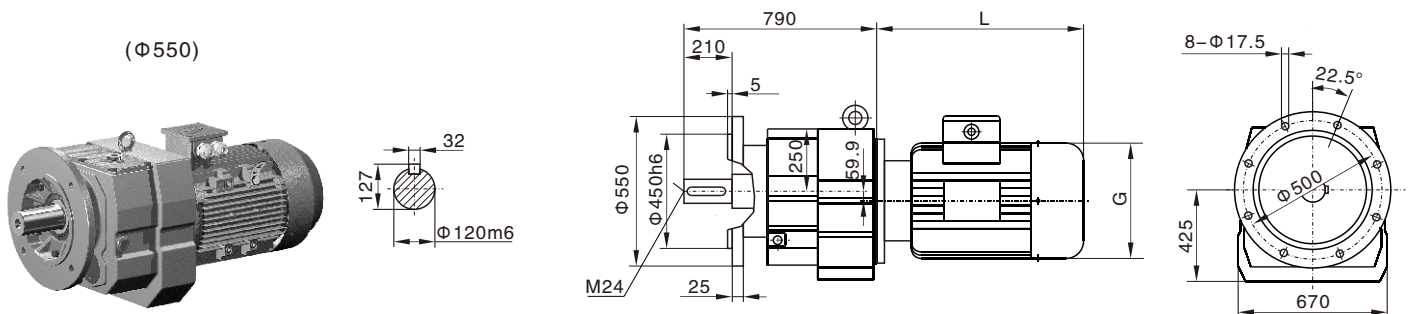



WR

WRF167


(Φ660)

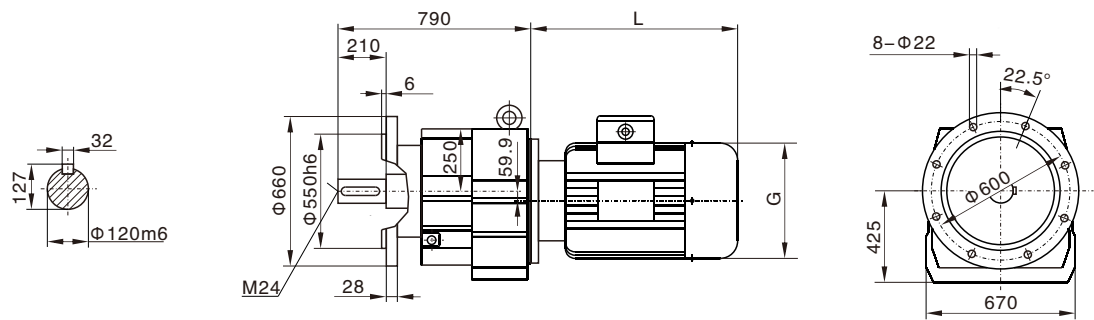



电机需方配或配特殊电机
时需加联接法兰(见第4页)

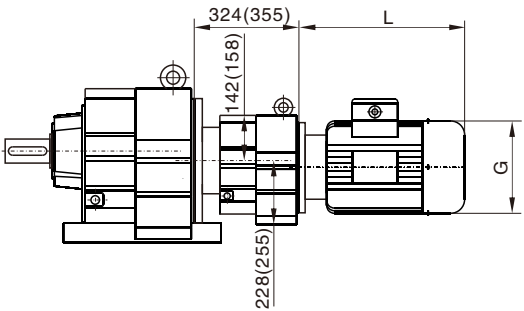



WR..167WR97(107)



WR..S167


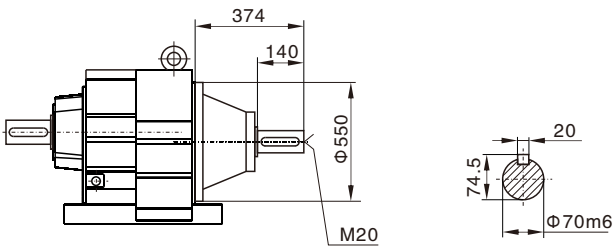


WR51

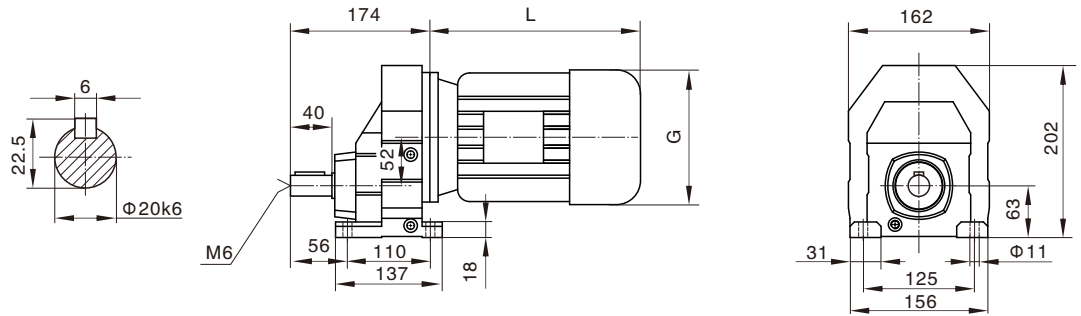



WRF51

($\Phi 140$)

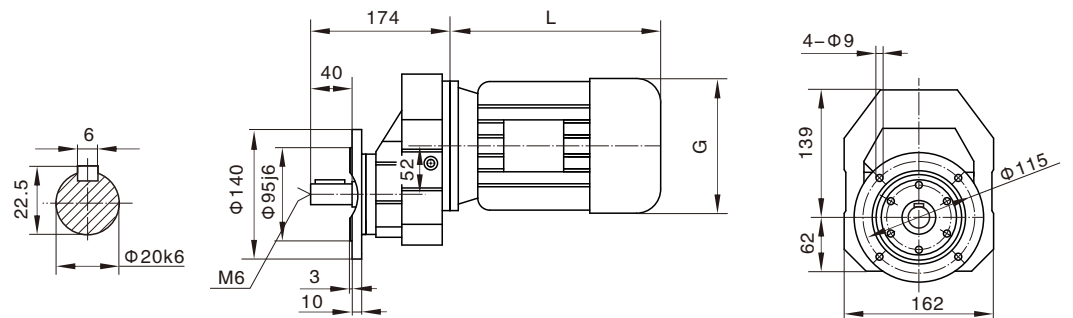



WRF51

($\Phi 160$)

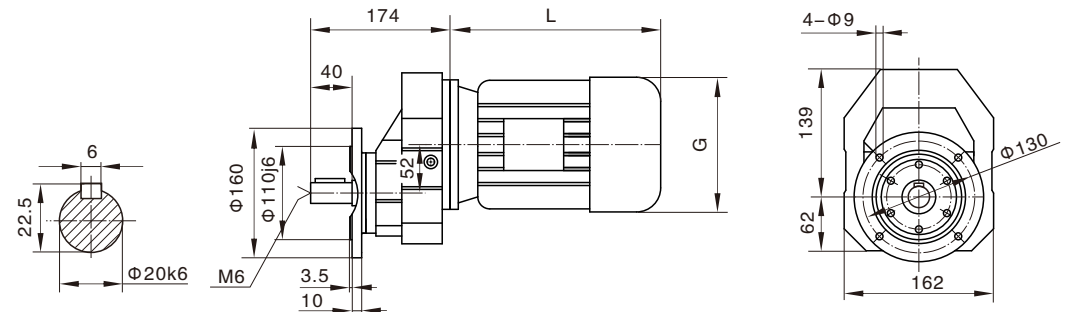



WRF51



($\Phi 200$)

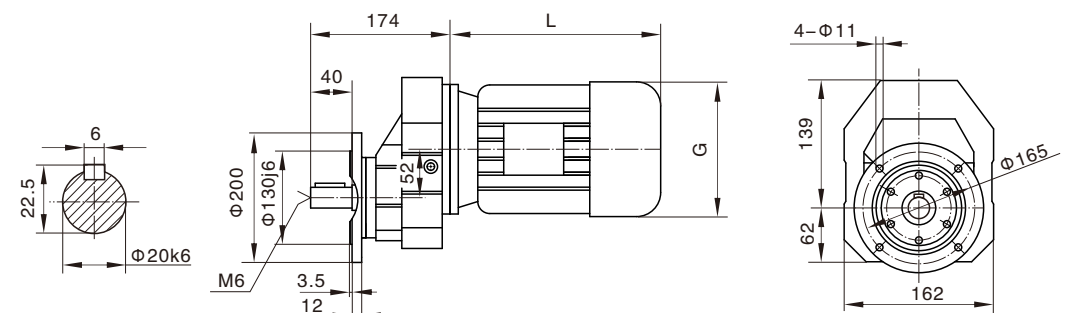


(Φ 250)

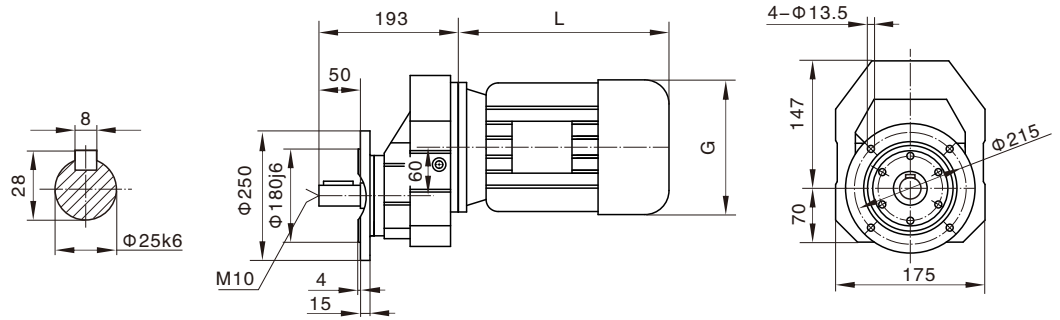



WR..S61

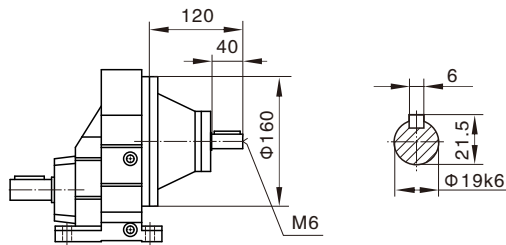

电机需方配或配特殊电机
时需加联接法兰






WR71

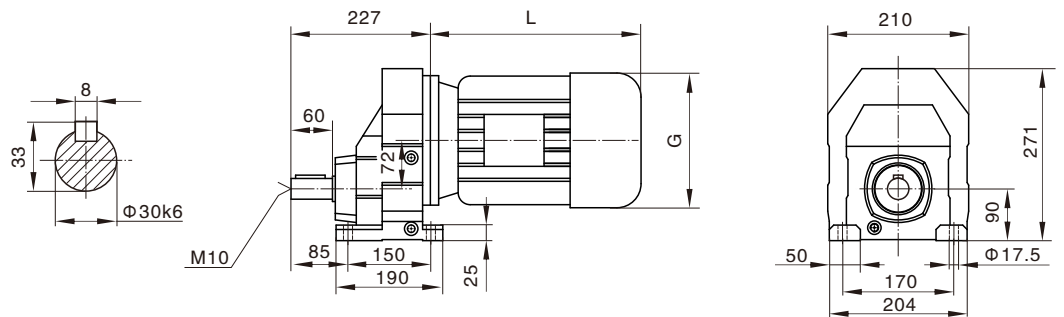

WRF71


(Φ200)

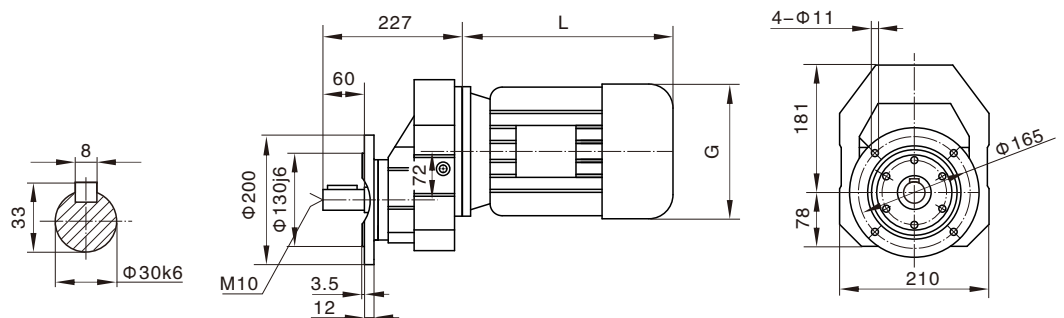


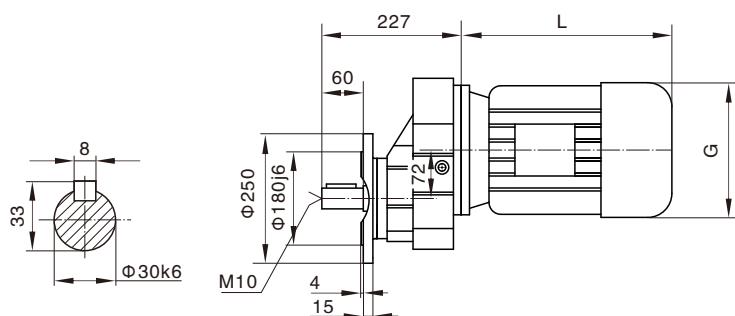


WRF71



(Φ250)





电机需方配或配特殊电机
时需加联接法兰



WR..S71

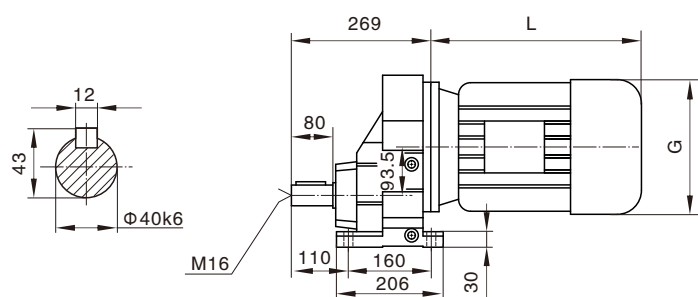


WR81

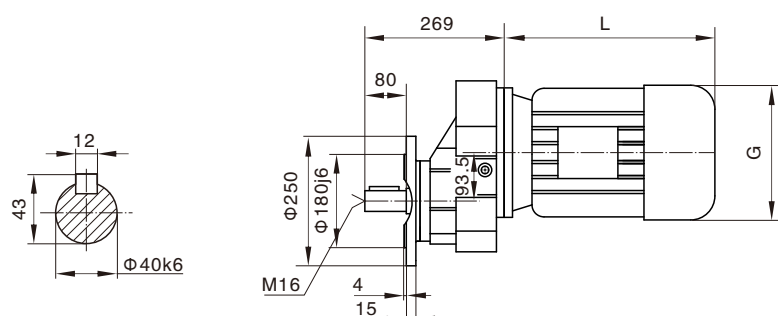



WRF81

(Φ250)





WRF81

(Φ300)

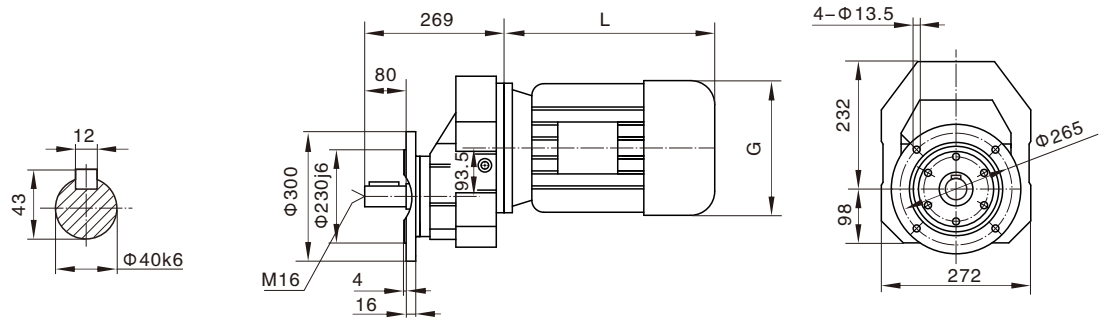



WR..S81

电机需方配或配特殊电机
时需加联接法兰

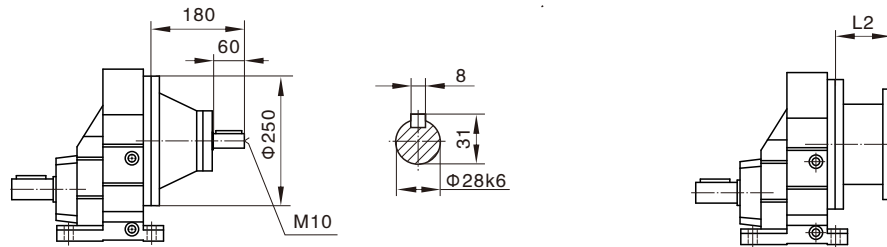



WR91

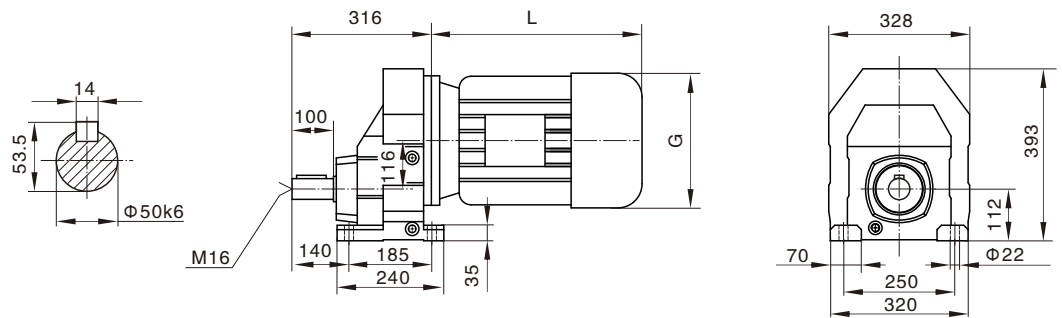

WRF91



(Φ300)

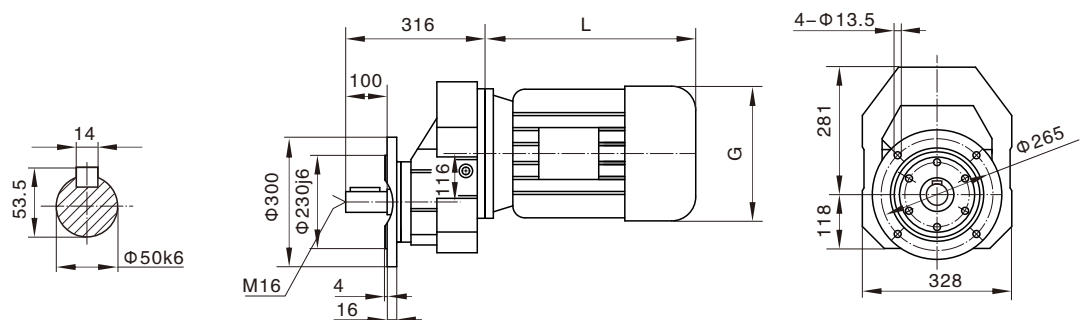

WR



WRF91

(Φ350)


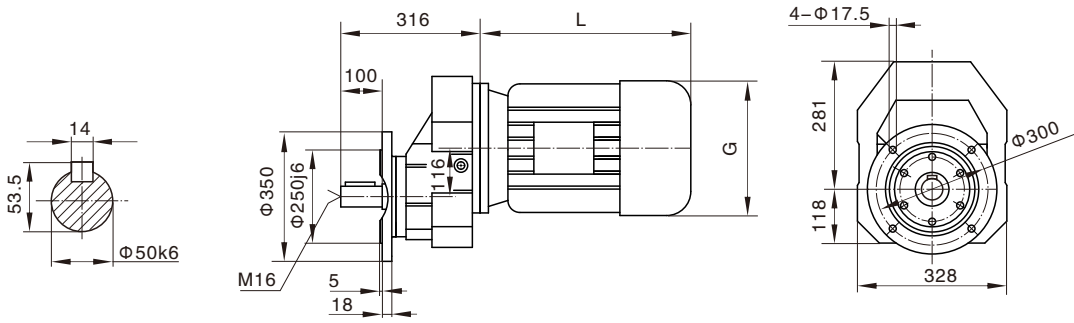


电机需方配或配特殊电机
时需加联接法兰

WR..S91


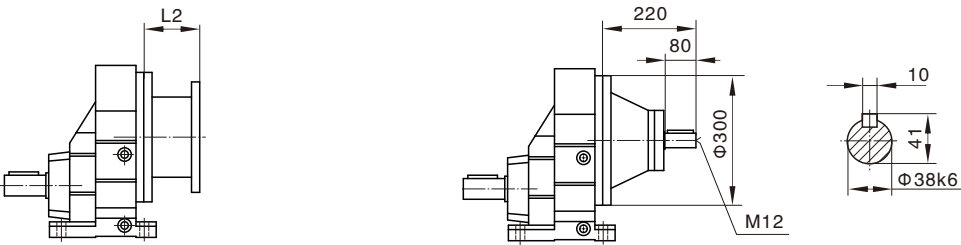


WR101

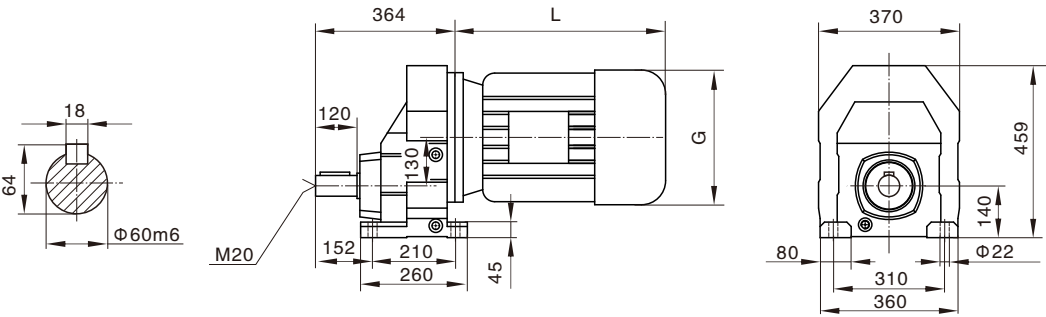



WRF101

(Φ350)

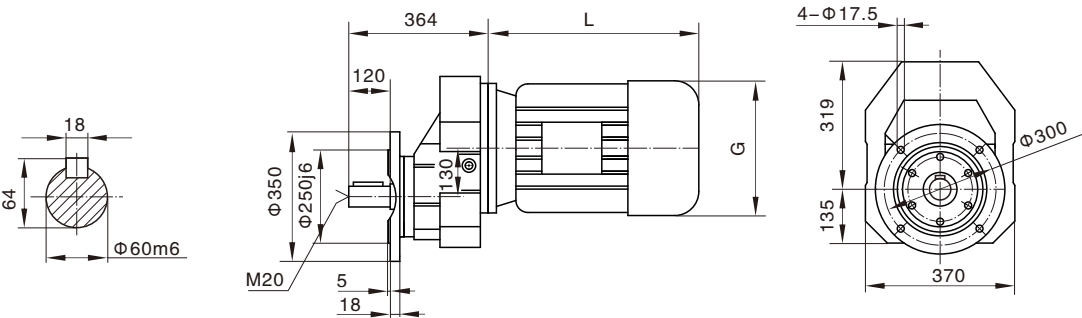

WRF101

($\Phi 450$)

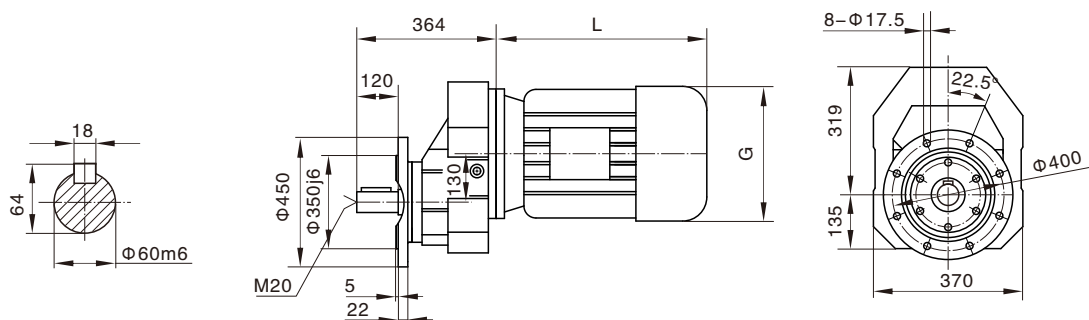

WR..S101

电机需方配或配特殊电机
时需加联接法兰

